

Wind Resource Mapping in Zambia

12 MONTH SITE RESOURCE REPORT

May 2018



This report was prepared by [DNV GL](#), under contract to [The World Bank](#).

It is one of several outputs from the wind resource mapping component of the activity “Renewable Energy Resource Mapping and Geospatial Planning – Zambia” [Project ID: P145271]. This activity is funded and supported by the Energy Sector Management Assistance Program (ESMAP), a multi-donor trust fund administered by The World Bank, under a global initiative on Renewable Energy Resource Mapping. Further details on the initiative can be obtained from the [ESMAP website](#).

This document is an **interim output** from the above-mentioned project, and the content is the sole responsibility of the consultant authors. Users are strongly advised to exercise caution when utilizing the information and data contained, as this may include preliminary data and/or findings, and the document has not been subject to full peer review. Final outputs from this project will be marked as such, and any improved or validated solar resource data will be incorporated into the [Global Wind Atlas](#).

Copyright © 2018 THE WORLD BANK

Washington DC 20433

Telephone: +1-202-473-1000

Internet: www.worldbank.org

The World Bank, comprising the International Bank for Reconstruction and Development (IBRD) and the International Development Association (IDA), is the commissioning agent and copyright holder for this publication. However, this work is a product of the consultants listed, and not of World Bank staff. The findings, interpretations, and conclusions expressed in this work do not necessarily reflect the views of The World Bank, its Board of Executive Directors, or the governments they represent.

The World Bank does not guarantee the accuracy of the data included in this work and accept no responsibility for any consequence of their use. The boundaries, colors, denominations, and other information shown on any map in this work do not imply any judgment on the part of The World Bank concerning the legal status of any territory or the endorsement or acceptance of such boundaries.

The material in this work is subject to copyright. Because The World Bank encourages dissemination of its knowledge, this work may be reproduced, in whole or in part, for non-commercial purposes as long as full attribution to this work is given. Any queries on rights and licenses, including subsidiary rights, should be addressed to World Bank Publications, The World Bank Group, 1818 H Street NW, Washington, DC 20433, USA; fax: +1-202-522-2625; e-mail: pubrights@worldbank.org. Furthermore, the ESMAP Program Manager would appreciate receiving a copy of the publication that uses this publication for its source sent in care of the address above, or to esmap@worldbank.org.

RENEWABLE ENERGY WIND MAPPING FOR ZAMBIA

12-month Site Resource Report

The World Bank

Document No.: 10003564-HOU-R-01

Date: 8 May 2018

Issue: C



IMPORTANT NOTICE AND DISCLAIMER

1. This document is intended for the sole use of the Customer as detailed on the front page of this document to whom the document is addressed and who has entered into a written agreement with the DNV GL entity issuing this document ("DNV GL"). To the extent permitted by law, neither DNV GL nor any group company (the "Group") assumes any responsibility whether in contract, tort including without limitation negligence, or otherwise howsoever, to third parties (being persons other than the Customer), and no company in the Group other than DNV GL shall be liable for any loss or damage whatsoever suffered by virtue of any act, omission or default (whether arising by negligence or otherwise) by DNV GL, the Group or any of its or their servants, subcontractors or agents. This document must be read in its entirety and is subject to any assumptions and qualifications expressed therein as well as in any other relevant communications in connection with it. This document may contain detailed technical data which is intended for use only by persons possessing requisite expertise in its subject matter.
2. This document is protected by copyright and may only be reproduced and circulated in accordance with the Document Classification and associated conditions stipulated or referred to in this document and/or in DNV GL's written agreement with the Customer. No part of this document may be disclosed in any public offering memorandum, prospectus or stock exchange listing, circular or announcement without the express and prior written consent of DNV GL. A Document Classification permitting the Customer to redistribute this document shall not thereby imply that DNV GL has any liability to any recipient other than the Customer.
3. This document has been produced from information relating to dates and periods referred to in this document. This document does not imply that any information is not subject to change. Except and to the extent that checking or verification of information or data is expressly agreed within the written scope of its services, DNV GL shall not be responsible in any way in connection with erroneous information or data provided to it by the Customer or any third party, or for the effects of any such erroneous information or data whether or not contained or referred to in this document.
4. Any energy forecasts estimates or predictions are subject to factors not all of which are within the scope of the probability and uncertainties contained or referred to in this document and nothing in this document guarantees any particular wind speed or energy output.

KEY TO DOCUMENT CLASSIFICATION

Strictly Confidential	:	For disclosure only to named individuals within the Customer's organization.
Private and Confidential	:	For disclosure only to individuals directly concerned with the subject matter of the document within the Customer's organization.
Commercial in Confidence	:	Not to be disclosed outside the Customer's organization.
DNV GL only	:	Not to be disclosed to non-DNV GL staff
Customer's Discretion	:	Distribution for information only at the discretion of the Customer (subject to the above Important Notice and Disclaimer and the terms of DNV GL's written agreement with the Customer).
Published	:	Available for information only to the general public (subject to the above Important Notice and Disclaimer).

Project name: Renewable Energy Wind Mapping for Zambia
 Report title: 12-month Site Resource Report
 Customer: The World Bank
 1818 H Street, N.W.
 Washington, DC 20433

GL Garrad Hassan Canada, Inc.
 Energy, Advisory Americas
 4100 Rue Molson, Suite 100
 Montreal, QC H1Y 3N1, Canada
 Tel: +1 (514) 272-2175
 Enterprise No.: 860480037

Contact person: Kenta Usui
 Date of issue: 8 May 2018
 Project No.: 10034303
 Document No.: 10003564-HOU-R-01, Issue C

Task and objective:

Wind resource assessment at eight mast locations across Zambia, and energy estimates for eight preliminary wind farms.

Prepared by:

Verified by:

Approved by:

J. Basson
Energy Analyst, Energy Services

P. Gurbas
Energy Analyst, Energy Services

S. Dokouzian
Senior Project Manager, Development and Engineering Services

S. Bourne
KVP Leader, Renewable Energy Project Development

- Strictly Confidential
- Private and Confidential
- Commercial in Confidence
- DNV GL only
- Customer's Discretion
- Published

Keywords:

Wind Resource, Energy Assessment, ESMAP, Zambia

© Garrad Hassan America, Inc.. All rights reserved.

Reference to part of this report which may lead to misinterpretation is not permissible.

Issue	Date	Reason for Issue	Prepared by	Verified by	Approved by
A	19 March 2018	Initial revision for review	J. Basson	P. Gurbas / S. Bourne, S. Dokouzian	
B	4 May 2018	Added WB comments - Final	J. Basson	P. Gurbas / S. Bourne, S. Dokouzian	
C	8 May 2018	Additional WB comments - Final	J. Basson	P. Gurbas / S. Bourne, S. Dokouzian	



Table of contents

EXECUTIVE SUMMARY	6
1 INTRODUCTION	9
2 PROJECT DESCRIPTION	10
2.1 Site description	10
2.2 Turbine technology	11
2.3 Neighboring wind farms	12
3 ON-SITE WIND MONITORING	13
3.1 Wind resource measurements	13
3.2 Data processing	13
4 WIND ANALYSIS	15
4.1 Measurement height wind regime	15
4.2 Hub-height wind regime	17
4.3 Wind regime across the site	21
5 ENERGY ANALYSIS	22
5.1 Preliminary wind turbine layouts	22
5.2 Gross and net energy estimates	22
5.3 Seasonal and diurnal distributions	24
6 UNCERTAINTY	26
7 SITE CONDITIONS	27
7.1 Turbulence Intensity	27
7.2 Extreme wind speeds	29
8 OBSERVATIONS AND RECOMMENDATIONS	32
9 CONCLUSION	34
10 REFERENCES	35

Appendices

APPENDIX A WIND DATA STATISTICS

APPENDIX B REFERENCE STATIONS CONSIDERED

APPENDIX C WIND FARM SITE INFORMATION AND LAYOUTS

APPENDIX D TURBINE LAYOUT RESULTS

APPENDIX E MONTHLY AND DIURNAL PRODUCTION PROFILES

APPENDIX F UNCERTAINTY ANALYSIS



APPENDIX G SITE CONDITIONS

List of tables

Table 2-1 Site descriptions	11
Table 2-2 Proposed turbine model parameters	11
Table 3-1 Met mast summary	13
Table 3-2 Summary of site masts data coverage	14
Table 4-1 Site period wind speeds	15
Table 4-2 Reference data sets considered for correlation to site data.....	16
Table 4-3 Reference data sets considered for correlation to site data.....	16
Table 4-4 Applied long-term wind speed adjustments	17
Table 4-5 Shear exponents and hub height wind speeds.....	17
Table 4-6 Average long-term hub height wind speed estimates at the turbine locations.....	21
Table 5-1 Generic power curve	23
Table 5-2 Energy production summary.....	23
Table 6-1 Summary of project net average energy production for each site.....	26
Table 6-2 Site average sensitivity ratios.....	26
Table 7-1 Predicted extreme wind speeds by Method of Independent Storms (MIS) at selected turbine locations	30
Table 7-2 Maximum 10-min and 3-sec wind speeds at mast locations.....	31
Table G-1 Predicted profiles of design equivalent turbulence intensity at the Choma site for a Generic 4 MW wind turbine at a hub height of 130 m	1
Table G-2 Predicted profiles of design equivalent turbulence intensity at the Mwinilunga site for a Generic 4 MW wind turbine at a hub height of 130 m	3
Table G-3 Predicted profiles of design equivalent turbulence intensity at the Lusaka site for a Generic 4 MW wind turbine at a hub height of 130 m	5
Table G-4 Predicted profiles of design equivalent turbulence intensity at the Mpika site for a Generic 4 MW wind turbine at a hub height of 130 m	7
Table G-5 Predicted profiles of design equivalent turbulence intensity at the Chanka site for a Generic 4 MW wind turbine at a hub height of 130 m	9
Table G-6 Predicted profiles of design equivalent turbulence intensity at the Petauke site for a Generic 4 MW wind turbine at a hub height of 130 m	11
Table G-7 Predicted profiles of design equivalent turbulence intensity at the Mansa site for a Generic 4 MW wind turbine at a hub height of 130 m	13
Table G-8 Predicted profiles of design equivalent turbulence intensity at the Malawi site for a Generic 4 MW wind turbine at a hub height of 130 m	15

List of figures

Figure 2-1 Mast locations	10
Figure 4-1 Long-term hub-height frequency distribution and wind roses	21
Figure 5-1 Annual energy production profiles	25
Figure 7-1 Predicted profiles of site minimum, maximum and average design equivalent turbulence intensity for the Mpika site using a Generic 4.0 MW wind turbine at a hub height of 130 m.....	29

EXECUTIVE SUMMARY

The World Bank (the “Customer”) retained Garrad Hassan America, Inc. (DNV GL) to complete a 12-month Site Resource Report, which consists of an independent analysis of the wind regime and energy production at eight locations across Zambia, as part of the Renewable Energy Wind Mapping for Zambia (part of the ESMAP Program). The results of the work are reported here.

The overall mandate consists of providing a validated mesoscale wind atlas for Zambia, including associated deliverables and wind energy development training courses. Meteorological data is collected at eight sites over a 2-year period. The 12-month Site Resource Report provides interim wind resource statistics at the eight masts and energy production estimates for generic wind farms in the vicinity of the masts. The program’s goal is to provide Zambian policy makers, stakeholders, and independent power producers with accurate and valuable knowledge of the national wind resource, including complementary tools, which can be of direct practical use, both for formulating energy policy and implementing wind projects.

The eight meteorological masts were installed and commissioned in November and December 2016. Based on a single year of data collection, DNV GL has evaluated the wind resource at each location, the long-term wind regime, and the estimated energy production based on a generic 4 MW wind turbine, with a rotor of 140 m and a hub height of 130 m. A brief summary of the key results is presented in the table below.

Results	Choma	Mwinilunga	Lusaka	Mpika
Average air density at hub elevation [kg/m ³]	1.00	0.99	1.03	1.00
On-site measurement period [years]	1.2	1.1	1.1	1.1
Long-term reference period [years]	16.0	16.0	16.0	16.0
Long-term hub height wind speed at met mast [m/s]	7.4	7.4	7.9	7.3
Average turbine wind speed [m/s]	7.4	7.5	8.2	7.3
10-year P50 Net Energy [GWh/annum]	303.0	323.3	386.0	320.3
10-year P50 Net Capacity Factor [%]	34.6%	36.9%	44.0%	36.5%

Results	Chanka	Petauke	Mansa	Malawi
Average air density at hub elevation [kg/m ³]	1.01	1.04	1.01	1.04
On-site measurement period [years]	1.1	1.1	1.1	1.1
Long-term reference period [years]	16.0	16.0	16.0	16.0
Long-term hub height wind speed at met mast [m/s]	7.4	6.5	6.9	6.9
Average turbine wind speed [m/s]	7.5	7.0	7.3	7.1
10-year P50 Net Energy [GWh/annum]	345.6	291.5	314.7	303.7
10-year P50 Net Capacity Factor [%]	39.4%	33.2%	35.9%	34.6%

Other key conclusions and recommendations from the study are as follows:

- The net energy predictions presented above represent the long-term mean, 50% exceedance level, for the annual energy production of the generic wind farms. These values are the best estimate of the long-term mean values to be expected from the project. There is therefore a 50% chance that,

even when taken over very long periods, the mean energy production will be less than the values given.

- The standard error associated with the prediction of energy capture has been calculated and the confidence limits for the prediction are given in the table below.

Site	Choma	Mwinilunga	Lusaka	Mpika
Probability of exceedance	10-year average [GWh/annum]			
50%	303.0	323.3	386.0	320.3
75%	276.2	297.0	353.9	292.1
90%	251.8	272.4	323.3	266.5
95%	236.8	257.0	304.7	250.5
99%	209.2	227.6	268.1	222.6

Site	Chanka	Petauke	Mansa	Malawi
Probability of exceedance	10-year average [GWh/annum]			
50%	345.6	291.5	314.7	303.7
75%	311.2	261.5	286.4	274.2
90%	279.9	233.6	260.6	247.3
95%	260.3	217.2	244.5	230.5
99%	223.3	186.3	214.2	201.7

- Some of the uncertainties in the table above are considered to be high based on DNV GL expectations for a modern utility-scale wind farm. The largest contributors to uncertainty in the estimates above included the evaluation of the long-term wind regime, wind shear extrapolation, and horizontal extrapolation. DNV GL notes the following observations and opinions regarding uncertainty:
 - The uncertainty in the long-term analysis was driven by the lack of viable ground-stations to verify the reanalysis data used to conduct the long-term analysis. For this reason, there is increased uncertainty in the long-term wind regime at each site.
 - The uncertainty associated with the vertical extrapolation to hub height was elevated at all sites due to the large extrapolation distance. It was particularly high at Mwinilunga, Lusaka, Mansa, and Malawi where low wind speeds and strong thermal heating patterns resulting in high values of measured wind shear at the met mast locations. There is uncertainty that these measurements will remain constant to the estimated turbine hub height of 130 m and additional uncertainty where the wind turbines are site large distances away from the met mast where the measurements were taken. To reduce the uncertainty associated with the vertical wind speed extrapolation, DNV GL strongly recommends the use of taller met masts and/or remote sensing to characterize the wind regime above the existing mast height.
 - The uncertainty associated with the horizontal extrapolation of the wind speeds is high at some sites due to the distance of the turbine locations from the proposed met mast and the unavailability of high resolution elevation data. Some turbines were sited in locations far from



the met masts in an effort to maximize energy production. For a bankable wind energy assessment, DNV GL recommends placing measurements at the location of the proposed wind turbines, with each of the wind turbines at least 2 km from a met mast.

- The proposed wind turbine layouts are preliminary and consider general siting requirements, but not detailed environmental, technical, or construction constraints. A more thorough feasibility analysis shall be undertaken to evaluate if the areas can host wind turbines and interconnect to the transmission network. The purpose of the analysis is to provide a general understanding of how a generic wind farm would be sited and how it would perform, while taking into consideration the uncertainties and recommendations above.
- The turbine capacity [MW] and power curve for the generic turbine is a conservative representation of current technology and reflects the type of technology that is expected to be deployed in the near future. Careful selection of a wind turbine model suitable for the site should be considered, including transportation logistics feasibility.
- The met masts were sited in their current locations primarily for the purpose of validating the national wind atlas, upon completion of 24 months of data acquisition. Some of the locations may also be suitable for large scale wind development, but not all are ideal for this purpose. As such, DNV GL recommends that stakeholders wishing to develop a wind project in Zambia not restrict their site selection to the eight mast locations, as there is wind energy potential in locations across the country that are not currently well-represented by a met mast.

To conclude, there is now an established network of state-of-the-art wind measurement masts in Zambia that can be used to support stakeholder wind analysis activities and future utility-scale wind development in-country. In the future, this network of masts will also provide the industry with a source of long-term reference station data which could greatly reduce uncertainties for potential developers. The data collected from the eight met masts are considered very good both in terms of data quality and data coverage. Further investment by stakeholders in well-organized measurement campaigns and in feasibility analysis that are focused on reducing uncertainties will help support future growth of the Zambian wind market.



1 INTRODUCTION

The World Bank (the “Customer”) retained Garrad Hassan America, Inc. (DNV GL) to complete a 12-month Site Resource Report, which consists of an independent analysis of the wind regime and energy production at eight locations across Zambia, as part of the Renewable Energy Wind Mapping for Zambia (part of the ESMAP Program). The results of the work are reported here.

This report presents a description of the project sites and turbine technology. It then describes the available measurements and analysis of the wind data followed by an evaluation of the expected project gross and net energy for preliminary wind farms in the vicinity of the masts, as influenced by assumed losses and uncertainties. Finally, it presents DNV GL’s observations and recommendations.

The overall mandate consists of providing a validated mesoscale wind atlas for Zambia, including associated deliverables and wind energy development training courses. Meteorological data is collected at eight sites over a 2-year period. The 12-month Site Resource Report provides interim wind resource statistics at the eight masts and energy production estimates for preliminary wind farms in the vicinity of the masts. The program’s goal is to provide Zambian policy makers, stakeholders, and independent power producers with accurate and valuable knowledge of the national wind resource, including complementary tools, which can be of direct practical use, both for formulating energy policy and implementing wind projects.

2 PROJECT DESCRIPTION

The masts that form part of the ESMAP program are located across Zambia to inform the wind mapping studies. Measurements of the wind regime have been made at eight meteorological (met) masts locations across Zambia as shown in Figure 2-1. DNV GL has analyzed a preliminary 25-turbine layout for a Generic 4 MW wind turbine at a hub height of 130 m close to each mast location to assess the potential energy production at each location.

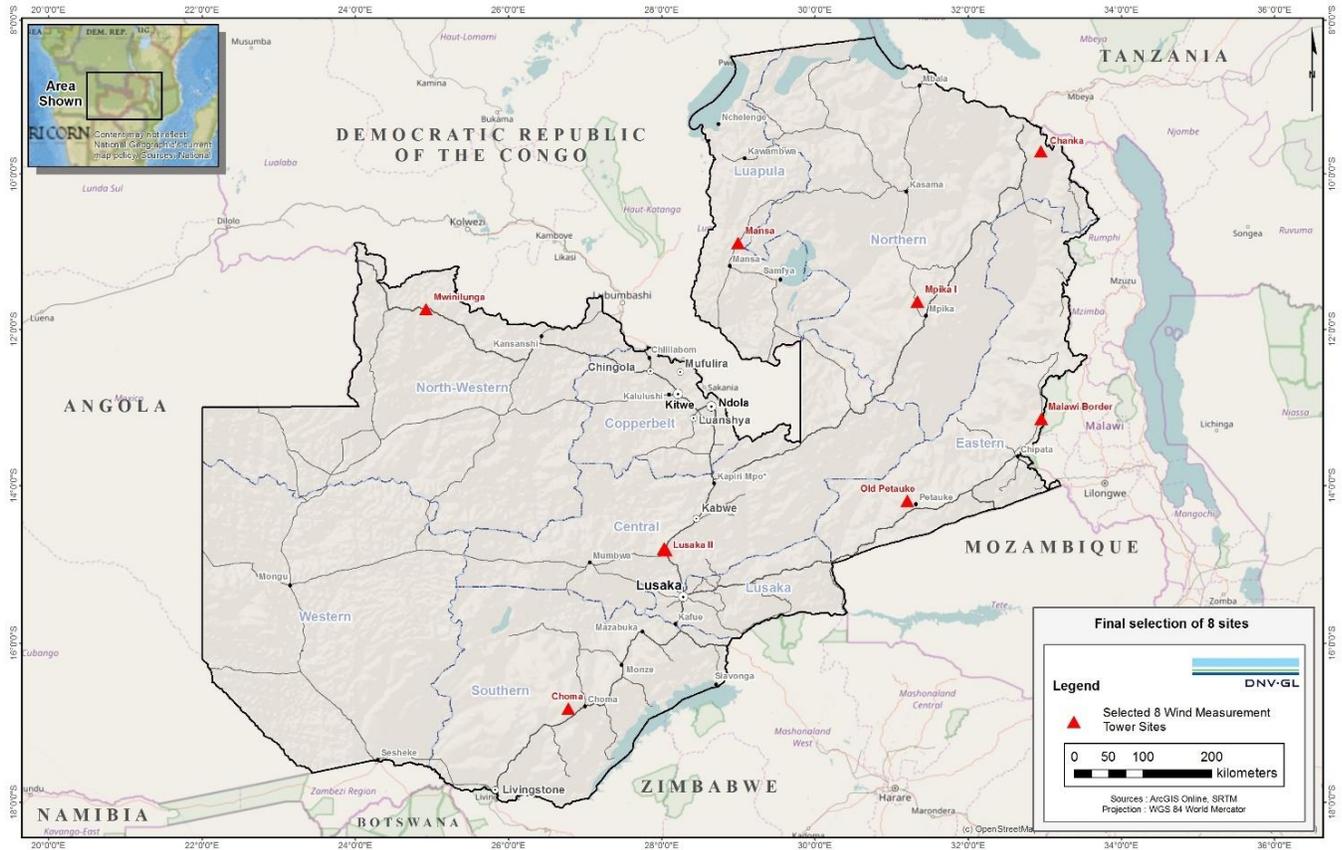


Figure 2-1 Mast locations

2.1 Site description

The met masts and proposed preliminary wind farms are located throughout Zambia, and the terrain complexity and ground cover vary from site to site. DNV GL has generated a preliminary turbine layout for each site based on a Generic 4 MW wind turbine at a hub height of 130 m. Figures showing the location of the proposed wind turbines and the met masts for each site are provided in Appendix C.

DNV GL commissioned the eight masts, therefore the measurement equipment has been inspected and the ground cover at the eight mast locations has been assessed. Table 2-1 below provides a brief summary of each site in terms of the terrain and ground cover and also provides insight into the range of turbine base

elevations. Note that some wind turbine layouts are at significant distances from the masts in an effort to maximize energy production.

Table 2-1 Site descriptions

Site location	Brief description	Turbine base elevations [m]
Choma	The site is located in an area of rural agricultural land approximately 20 km west of the town of Choma in the Southern Province. The ground cover consists mainly of low shrub-like vegetation interspersed with small trees and residences.	1346-1390
Mwinilunga	The site is located on a slightly elevated and lightly forested plateau approximately 60 km southeast of the town of Mwinilunga in the North-West Province. The ground cover consists mainly of shrub-like vegetation interspersed with trees.	1512-1545
Lusaka	The site is located in an area of flat, rural agricultural land approximately 70 km northwest of the city of Lusaka in the Central Province. The ground cover consists mainly of low crops interspersed with trees and residences.	1157-1183
Mpika	The site is located in an area of low lying bush and rural agricultural land approximately 25 km northwest of the town of Mpika in the Northern Province. The ground cover consists mainly of low shrub-like vegetation interspersed with trees and sparse residences.	1383-1415
Chanka	The site is located in an area of rural agricultural land approximately 80 km northeast of the town of Isoka in the Northern Province. The site is located between 35 and 50 km from the Malawi and Tanzanian borders, respectively on the crest of a plateau. The ground cover consists mainly of low shrub-like vegetation interspersed with small residences.	1273-1332
Petauke	The site is located in an area of rolling hills approximately 15 km northwest of the town of Petauke in the Eastern Province. The ground cover consists mainly of low lying crops and bush interspersed with small trees.	982-1090
Mansa	The site is located in on a small southwest-northeast ridge approximately 35 km north of the town of Mansa in the Luapula Province. The ground cover consists mainly of low shrub-like vegetation.	1300-1390
Malawi	The site is located in an area of flat, rural agricultural land approximately 80 km east of the town of Chipata in the Eastern Province. The ground cover consists mainly of low lying crops and bush interspersed with small trees.	1039-1080

A map of each site is presented in Appendix C showing the meteorological mast and turbine locations.

2.2 Turbine technology

The power curve used in this analysis represents a blended generic turbine model that has been generated by DNV GL. Table 2-2 summarizes the turbine model under consideration for each site.

Table 2-2 Proposed turbine model parameters

Turbine	Rated power [MW]	Hub height [m]	Peak power coefficient [C_p]	Valid PC density [kg/m^3]	Valid PC turbulence intensity range [%]
Generic 4 MW	4.0	130	0.44	1.225	6-12

Given the preliminary nature of the generic power curve used in this assessment, DNV GL recommends that potential stakeholders conduct a thorough market review of available technologies when assessing a potential wind farm site in Zambia. Turbine manufacturers should be approached at an early stage to gain acceptance of proposed turbine layouts and turbine suitability for each site and evaluate the need, if any, for



mitigation of fatigue loads through wind sector management. It shall also be noted that some turbine models may provide better energy capture and therefore improve the overall performance at the sites.

2.3 Neighboring wind farms

To DNV GL's knowledge, there are no utility-scale operational wind farms currently in Zambia. Therefore, no external wake effects are considered in the analysis.

3 ON-SITE WIND MONITORING

3.1 Wind resource measurements

Wind resource measurements have been recorded at the eight sites using met masts with measurements taken from November 2016 to January 2018. The characteristics of these measurements are summarized in Table 3-1.

Table 3-1 Met mast summary

Mast	Anemometer heights	Anemometer manufacturer and model	Period	Calibration certificate by MEASNET facility?	Anemometer(s) mounted in compliance with IEC guidance? ^a
Choma	80 m (x2), 60 m (x2), 42 m (x2), 20 m (x2)	Thies FCA, NRG Class 1	November 2016 – January 2018	Yes	Compliant
Mwinilunga	80 m (x2), 60 m (x2), 41 m (x2), 20 m (x2)	Thies FCA, NRG Class 1	December 2016 – January 2018	Yes	Compliant
Lusaka	80 m (x2), 60 m (x2), 41 m (x2), 20 m (x2)	Thies FCA, NRG Class 1	November 2016 – January 2018	Yes	Compliant
Mpika	80 m (x2), 60 m (x2), 41 m (x2), 20 m (x2)	Thies FCA, NRG Class 1	November 2016 – January 2018	Yes	Compliant
Chanka	80 m (x2), 60 m (x2), 41 m (x2), 20 m (x2)	Thies FCA, NRG Class 1	November 2016 – January 2018	Yes	Compliant
Petauke	80 m (x2), 60 m (x2), 41 m (x2), 20 m (x2)	Thies FCA, NRG Class 1	December 2016 – January 2018	Yes	Compliant
Mansa	80 m (x2), 60 m (x2), 41 m (x2), 20 m (x2)	Thies FCA, NRG Class 1	November 2016 – January 2018	Yes	Compliant
Malawi	80 m (x2), 60 m (x2), 41 m (x2), 20 m (x2)	Thies FCA, NRG Class 1	December 2016 – January 2018	Yes	Compliant

a. IEC 61400-12:2005 E [1]

The mounting arrangements of the instrumentation at the site masts are consistent with the recommendations of the IEC [1] and therefore considered to be in accordance with industry best practice for good quality wind measurements. Additional details about the configuration of each mast are available in the mast Commissioning Reports [2].

3.2 Data processing

Raw data from the met mast at each site have been collected by DNV GL. The wind data have been subject to a quality checking procedure by DNV GL to identify records which were affected by equipment malfunction and other anomalies. These records were excluded from the analysis. To minimize mast effects in the measured wind speed data, selective averaging was undertaken of the data recorded at the all instruments where parallel measurements were available.

The duration, basic statistics, and data coverage for the masts are summarized in Appendix A. Wind data coverage is generally very good, with only minor data loss. Overall data coverage levels for the key parameters and instruments on each mast are shown in the following Table 3-2.

Table 3-2 Summary of site masts data coverage

Mast	Height [m]	Available period [years]	Valid period [years]	Measured wind speed [m/s]	Wind speed data coverage [%]
Choma	80	1.2	1.1	6.5	95
Mwinilunga	80	1.1	1.1	6.0	100
Lusaka	80	1.1	1.1	6.2	99
Mpika	80	1.1	1.1	6.2	100
Chanka	80	1.1	1.1	6.5	100
Petauke	80	1.1	1.1	5.7	100
Mansa	80	1.1	1.1	5.8	100
Malawi	80	1.1	1.1	5.8	100

4 WIND ANALYSIS

The analysis of the site wind regime involved several steps. A summary of the results for each step of the process are provided in the following sections.

4.1 Measurement height wind regime

4.1.1 Site period wind speeds

Data were recorded at the site masts up to a measurement height of 80 m and over data period ranging from November 2016 to January 2018. Data coverage at the eight masts was between 95% and 100% and the measured mean wind speeds ranged from 5.7 m/s to 6.5 m/s. The values for each individual site are shown in Table 4-1 and in Appendix A.

Table 4-1 Site period wind speeds

Mast	Height [m]	Data Period	Data coverage [%]	Measured mean wind speed [m/s]
Choma	80.0	01/11/2016 – 10/01/2018	95	6.5
Mwinilunga	80.0	03/12/2016– 09/01/2018	100	6.0
Lusaka	80.0	21/11/2016– 09/01/2018	99	6.2
Mpika	80.0	20/11/2016– 09/01/2018	100	6.2
Chanka	80.0	23/11/2016– 10/01/2018	100	6.5
Petauke	80.0	09/12/2016– 09/01/2018	100	5.7
Mansa	80.0	26/11/2016– 10/01/2018	100	5.8
Malawi	80.0	21/12/2016– 10/01/2018	100	5.8

It should be noted that the wind speeds presented in Table 4-1 represent only the measured period of data at each location. DNV GL conducts a review of the representativeness of the measured data of the long-term wind regime in the following sections of this report.

4.1.2 Extension of the site period to the reference period

The inclusion of quality reference data can reduce the uncertainty in the estimate of the long-term wind regime at the site. When selecting appropriate reference data for this purpose it is important that the reference data's wind regime is driven by similar factors as the site wind regime and the reference data are consistent over the measurement period being considered.

4.1.2.1 Reference data considered

DNV GL has undertaken a review of the sources of reference data at each site in order to identify appropriate long-term reference stations for this analysis. Given the lack of viable ground station networks in Zambia with long-term, consistent data periods, this analysis has relied heavily upon reanalysis and virtual datasets. At each site, DNV GL has correlated the measured wind data to DNV GL's Virtual Met Data (VMD), ERA-Interim and MERRA-2. More information about these reference stations are provided in Appendix B. Table 4-2 summarizes the stations considered.

Table 4-2 Reference data sets considered for correlation to site data

Site location	Meteorological data source	Network	Distance from site	Start date	End date
Choma	VMD	DNV GL	On-site	02 Jan 2002	26 Nov 2017
	ERA	ECMWF	158 km northeast	01 Jan 2002	01 Jan 2018
	MERRA-2	NASA	67 km northwest	01 Jan 2002	01 Jan 2018
Mwinilunga	VMD	DNV GL	On-site	01 Jan 2002	26 Nov 2017
	ERA	ECMWF	115 km northwest	01 Jan 2002	01 Jan 2018
	MERRA-2	NASA	82 km north	01 Jan 2002	01 Jan 2018
Lusaka	VMD	DNV GL	On-site	02 Jan 2002	26 Nov 2017
	ERA	ECMWF	79 km northeast	01 Jan 2002	01 Jan 2018
	MERRA-2	NASA	35 km north	01 Jan 2002	01 Jan 2018
Mpika	VMD	DNV GL	On-site	02 Jan 2002	26 Nov 2017
	ERA	ECMWF	78 km northwest	01 Jan 2002	01 Jan 2018
	MERRA-2	NASA	80 km west	01 Jan 2002	01 Jan 2018
Chanka	VMD	DNV GL	On-site	02 Jan 2002	27 Dec 2017
	ERA	ECMWF	110 km northwest	01 Jan 2002	01 Jan 2018
	MERRA-2	NASA	80 km north	01 Jan 2002	01 Jan 2018
Petauke	VMD	DNV GL	On-site	02 Jan 2002	27 Dec 2017
	ERA	ECMWF	50 km west	01 Jan 2002	01 Jan 2018
	MERRA-2	NASA	34 km south	01 Jan 2002	01 Jan 2018
Mansa	VMD	DNV GL	On-site	02 Jan 2002	26 Nov 2017
	ERA	ECMWF	70 km northwest	01 Jan 2002	01 Jan 2018
	MERRA-2	NASA	59 km northeast	01 Jan 2002	01 Jan 2018
Malawi	VMD	DNV GL	On-site	02 Jan 2002	27 Dec 2017
	ERA	ECMWF	97 km northeast	01 Jan 2002	01 Jan 2018
	MERRA-2	NASA	52 km northwest	01 Jan 2002	01 Jan 2018

To determine whether use of reference data will reduce uncertainty, a correlation of monthly mean wind speeds between each consistent reference station and the site was completed. The results of this analysis are summarized in Table 4-3.

Table 4-3 Reference data sets considered for correlation to site data

Site	Coefficient of determination, R ²		
	VMD	ERA	MERRA-2
Choma	0.81	0.88	0.87
Mwinilunga	0.95	0.92	0.97
Lusaka	0.91	0.88	0.90
Mpika	0.89	0.93	0.97
Chanka	0.93	0.93	0.98
Petauke	0.91	0.95	0.97
Mansa	0.94	0.97	0.98
Malawi	0.79	0.97	0.97

During the analysis, DNV GL evaluates each long-term reference source for each site based on:

- how representative the location at which the reference source is defined is of the mast location,
- the strength of the correlation between the reference source data and the site mast data, and
- the consistency of the reference source data.

DNV GL's resulting choice of reference data sources and the corresponding long term adjustment for each site are shown in Table 4-4.

Table 4-4 Applied long-term wind speed adjustments

Site	Reference data sources included in long-term adjustment	Long term adjustment	Long-term adjusted mean wind speed, [m/s]
Choma	ERA	1.6%	6.6
Mwinilunga	VMD, MERRA-2	-0.4%	6.0
Lusaka	VMD, ERA, MERRA-2	4.3%	6.5
Mpika	VMD, MERRA-2	2.4%	6.3
Chanka	VMD	1.9%	6.6
Petauke	VMD	0.0%	5.7
Mansa	VMD, MERRA-2	1.4%	5.9
Malawi	VMD, MERRA-2	1.3%	5.8

It is noted that there is a lack of viable ground-station reference data to evaluate the consistency of the reanalysis and virtual datasets considered in this assessment. For this reason, there is increased uncertainty in the long-term wind regime at each site. This elevated uncertainty is considered in Section 6.

4.2 Hub-height wind regime

4.2.1 Hub-height wind speed

To extrapolate the wind speed estimates from the measurement height to the 130 m hub height, the average power law at the site masts has been evaluated between all relevant measurement heights and applied to the upper level measurements. The results of this analysis are shown in Table 4-5.

Table 4-5 Shear exponents and hub height wind speeds

Mast	Long-term upper measurement height wind speed [m/s]	Wind shear exponent	Hub Height wind speed estimate [m/s]
Choma	6.6	0.24	7.4
Mwinilunga	6.0	0.29	7.4
Lusaka	6.5	0.34	7.9
Mpika	6.3	0.21	7.3
Chanka	6.6	0.21	7.4
Petauke	5.7	0.26	6.5
Mansa	5.9	0.31	6.9
Malawi	5.8	0.34	6.9

It is noted that the measured wind shear at some mast locations is considered to be high (>0.25). Based on further review, DNV GL determined that the high wind shear measured at these masts is driven by the low wind speeds experienced on-site and thermal heating and cooling close to the ground surface. The thermal convection from the ground decreases wind speeds at the surface and this attenuating effect tends to decrease with altitude as the flow becomes more free stream and laminar. The thermal heating and cooling at the surface results in relatively high magnitudes of measured wind shear at some of the met masts. There is uncertainty that the wind shear measured at the met masts will remain constant with increasing altitude, and this uncertainty is higher when the estimated wind shear exponents are higher.


DNV GL recommends the use of remote sensing for site prospecting in Zambia, in order to more accurately characterize the vertical wind speed profile. Remote sensing measurements will further the understanding of the vertical wind speed profile and has the potential to drastically reduce the vertical extrapolation uncertainty, especially at sites where the extrapolation distance is large.


4.2.2 Hub-height wind speed and direction distributions


The hub-height wind speed and direction distributions were developed by extrapolating the measured wind speed data on a time series basis. Key project specific aspects of the analysis were:

- The distribution from each site mast was used as the basis of the analysis.
- The frequency distribution of each site mast was scaled to the representative long term hub height mean wind speed.

A representative long-term hub-height wind rose and wind speed histogram for each site are shown in Figure 4-1.

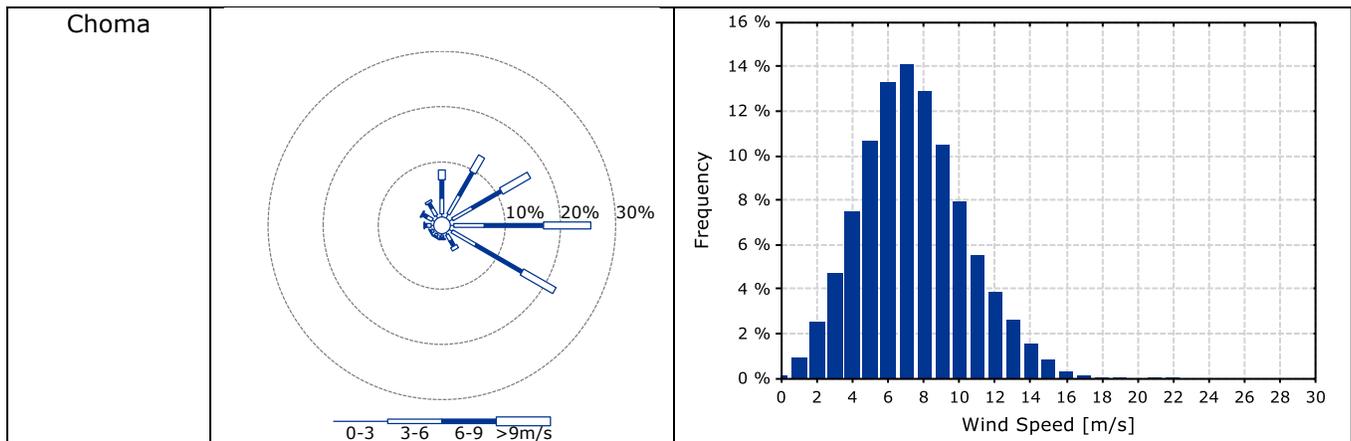

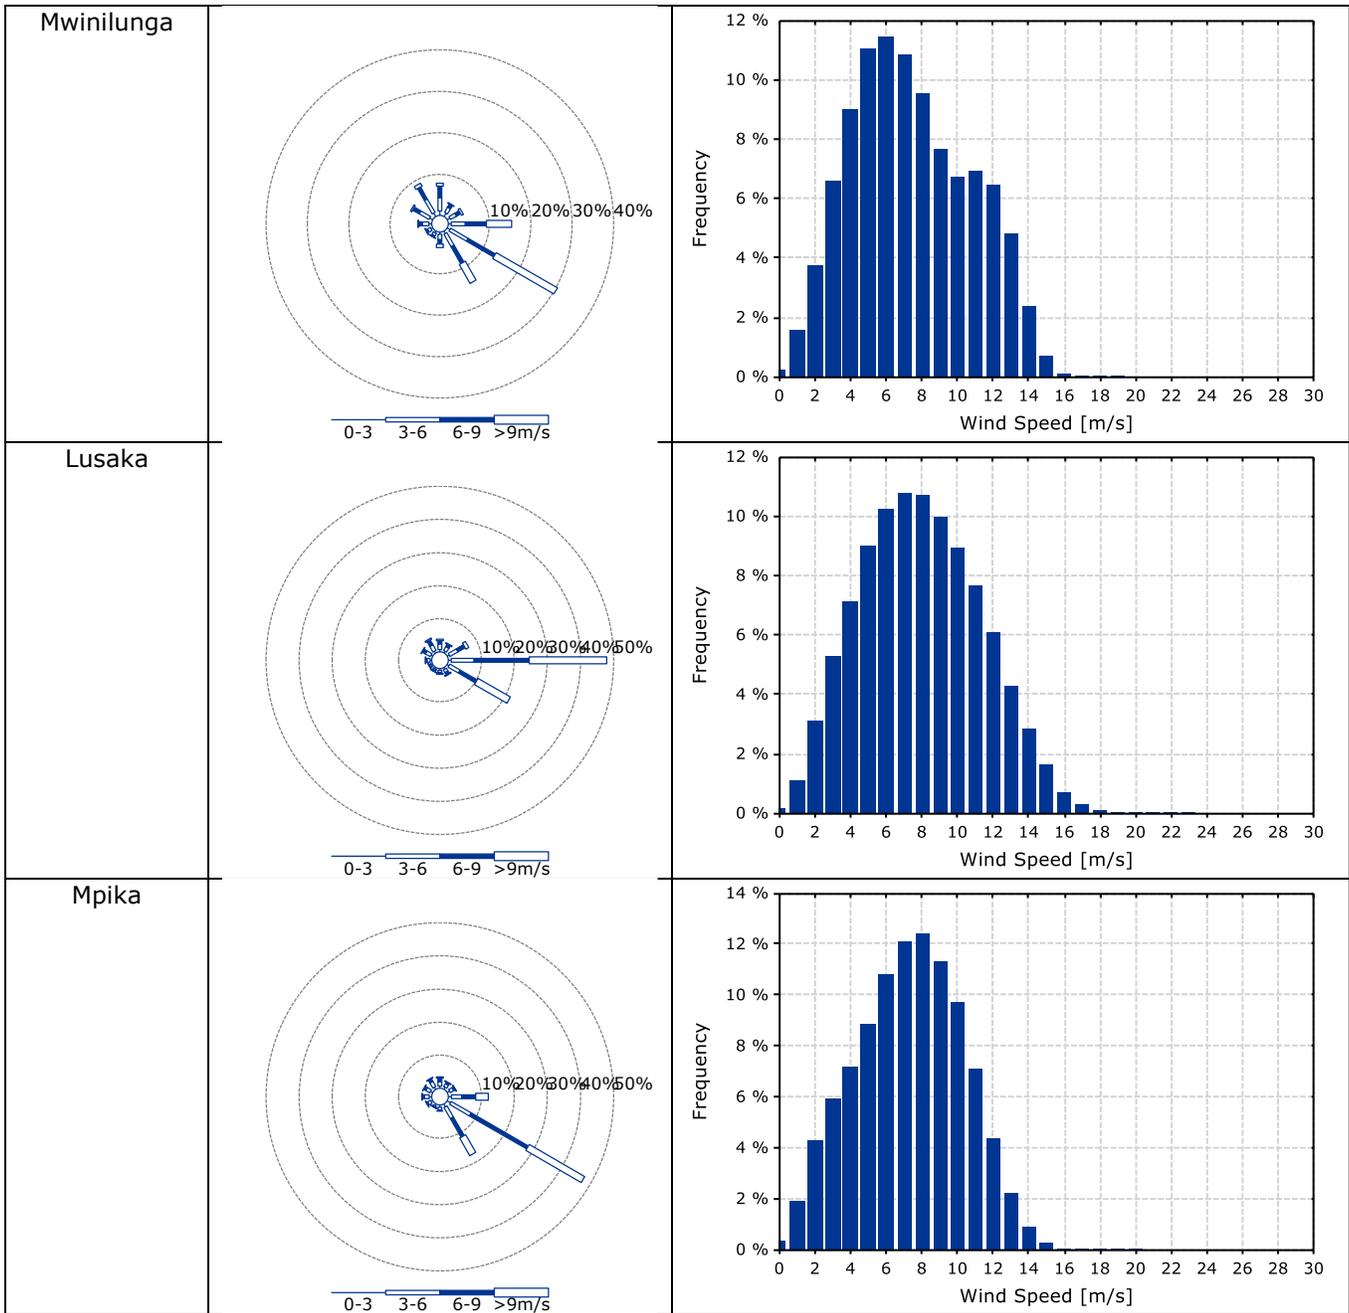

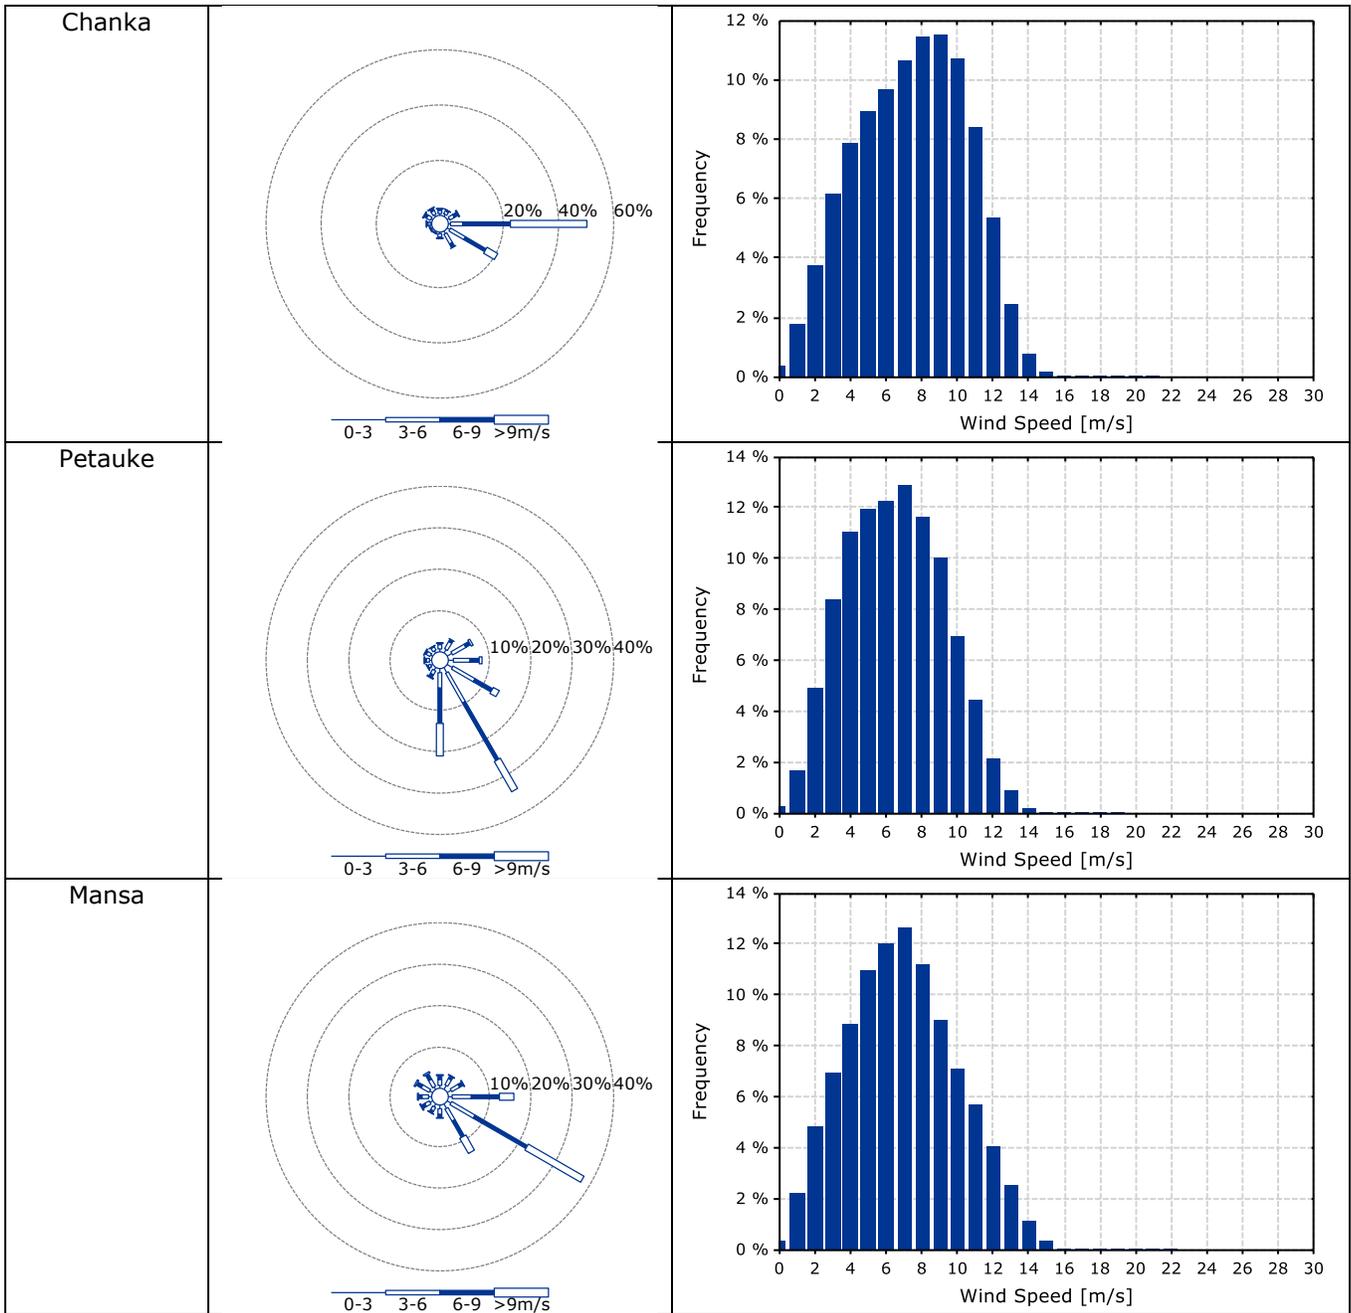

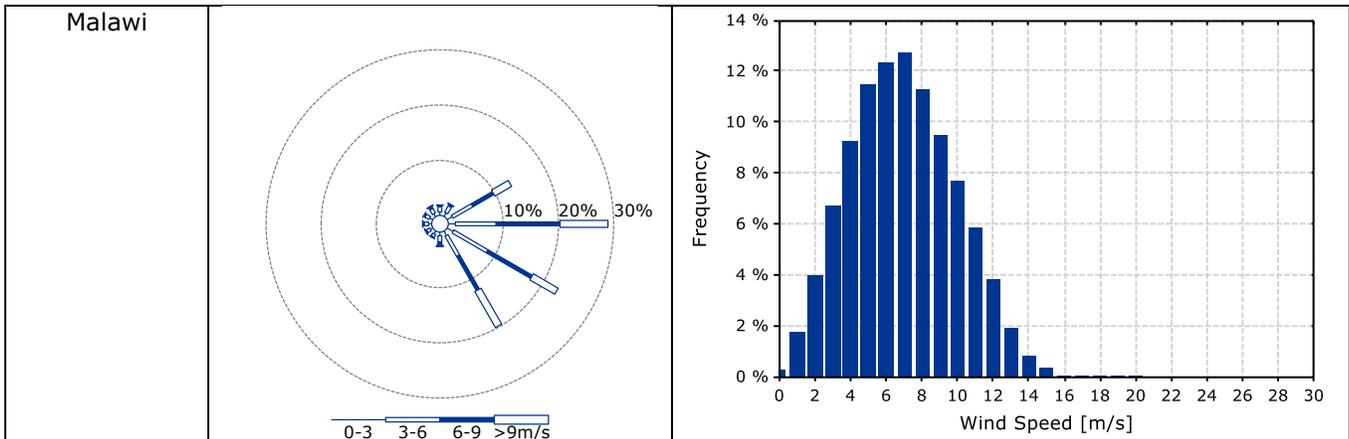


Figure 4-1 Long-term hub-height frequency distribution and wind roses

DNV GL notes that most of the wind speed frequency distributions measured by the site masts do not exhibit a standard Weibull shape. This factor should be considered when modeling the energy production at proposed sites across Zambia, as it could lead to inaccuracies in energy production estimates.

4.3 Wind regime across the site

The variation in wind speed over each site was predicted using the industry standard commercial WASP wind flow modelling software. Each mast has been used to initiate the wind flow modeling used to predict the long-term wind regimes at the turbine locations at its respective site. The average extrapolation distances across the eight sites ranges from 3.6 km at Mpika to 24.1 km at Chanka. Through this approach, the predicted long-term mean wind speeds at each turbine at the proposed hub height are presented in Appendix D. Table 4-6 summarizes the average turbine wind speed at each site at 130 m.

It should be noted that WASP calculations have high uncertainties when calculations: extend over large spatial distances; are initiated from positions with markedly different elevations, wind climates or exposure to those of the proposed turbine locations. The WASP wind flow model is also not suited to stable atmospheric conditions. For further wind assessment studies in Zambia, DNV GL recommends the use of CFD wind flow modeling to decrease horizontal extrapolation uncertainties.

Table 4-6 Average long-term hub height wind speed estimates at the turbine locations

Site	Average turbine wind speed at 130 m [m/s]
Choma	7.4
Mwinilunga	7.5
Lusaka	8.2
Mpika	7.3
Chanka	7.5
Petauke	7.0
Mansa	7.3
Malawi	7.1

5 ENERGY ANALYSIS

5.1 Preliminary wind turbine layouts

DNV GL produced 100 MW preliminary wind turbine layouts in the vicinity of the eight masts. The proposed wind turbine layouts are preliminary and consider general siting requirements, but not detailed environmental, technical, or construction constraints. The purpose of the layouts is to provide a general understanding of how a wind farm would be sited and how it would perform, while taking into consideration the uncertainties and recommendations throughout this report.

The layouts are comprised of 25 – 4 MW generic wind turbines, with a rotor of 140 m and a hub height of 130 m. DNV GL designed the preliminary wind farm layouts with the objective of maximizing the energy output of the wind farm, while generally considering balance-of-plant (BOP). In addition to best practices, the following parameters were considered:

- A minimum of 3 rotor diameters spacing perpendicular to prevailing winds.
- A minimum of 6 rotor diameters spacing parallel to prevailing winds.
- No turbines in areas of terrain slope greater than 15%.
- Nearby roadway access, and access in terrain with slopes no greater than 10%.
- No turbines in general environmentally constrained areas as defined at the national level under the initial site selection report [3]. Site-specific and in-depth analysis of environmental constraints were not conducted.
- Reasonable setbacks to dwellings and settlements, broadly identified using aerial imagery. Site specific review and field validation of inhabited areas was not conducted and firm setbacks to be established for a more final layout optimization study.

In addition, DNV GL did not consider mechanical loading on wind turbines to ensure suitability with site conditions, sound levels at nearby inhabited areas, and interconnection feasibility.

The wind turbine layouts are presented in Appendix C, and the coordinates in Appendix D.

5.2 Gross and net energy estimates

The gross energy production at the individual turbine locations has been calculated using the WindFarmer software and the results of the wind flow modeling.

A theoretical and generic power curve was created by DNV GL for a 4 MW wind turbine. The power curve is shown in Table 5-1 for an air density of 1.225 kg/m³.

Table 5-1 Generic power curve

Wind speed [m/s]	Power production [kW]
0 - 2	0
3	17
4	190
5	471
6	880
7	1429
8	2145
9	2956
10	3630
11	3925
12 - 25	4000

The projected net energy production of each wind farm shown in Table 5-2 was calculated by applying a number of energy loss factors to the gross energy production. The predictions represent the estimate of the annual production expected over the first 10 years of operation. The individual turbine results are presented in Appendix D.

Table 5-2 Energy production summary

Scenario	Choma	Mwinilunga	Lusaka	Mpika	Chanka	Petauke	Mansa	Malawi
Wind Farm Rated Power [MW]	100							
Gross Energy Output [GWh/annum]	356.6	374.8	435.9	364.2	387.5	337.3	355.6	345.3
Array effects [%]	95.0	95.9	98.4	97.4	98.3	95.3	98.0	97.3
Availability [%]	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
Electrical efficiency [%]	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
Turbine performance [%]	97.6	98.1	98.1	98.5	99.0	98.9	98.4	98.5
Environmental [%]	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
Curtailments [%]	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
Total Losses (%)	85.0	86.2	88.6	88.0	89.2	86.4	88.5	88.0
Asymmetric production effect [%]	100.0	99.9	100.0	100.0	100.0	100.0	100.0	100.0
Net Energy Output [GWh/annum]	303.0	323.3	386.0	320.3	345.6	291.5	314.7	303.7
Net Capacity Factor [%]	34.6	36.9	44.0	36.5	39.4	33.2	35.9	34.6



Table 5-2 includes potential sources of energy loss that have been either assumed to be the DNV GL standard values or estimated for this project. Project specific aspects of the loss estimates are provided in the following bullets:

- Array effect – The array effects have been calculated using the WindFarmer 5 wake model and consider internal and external array effects. No neighboring or future wind farms are currently considered in the loss estimates.
- Availability – This category considers turbine availability, balance of plant, and grid availability. Considering the Generic 4 MW turbine model, the turbine availability for year 1 of operation was estimated to be 94.0% and for years 2-5 to be 96.0%. Subsequent years were adjusted in accordance with DNV GL’s standard method. Generic values were used to estimate balance of plant and grid availability losses.
- Operational electrical efficiency – Details of the specific balance of plant infrastructure and grid connection point have not been considered. Therefore, DNV GL has considered a standard loss value.
- Turbine performance – As part of the turbine performance category, DNV GL has considered high wind speed hysteresis, site specific power curve adjustment, and performance degradation over time.
- Environmental – Detailed environmental losses were not considered in this analysis.
- Curtailments – Detailed curtailment losses were not considered in this analysis.

5.3 Seasonal and diurnal distributions

The expected seasonal and diurnal variation in energy production at 130 m is presented at each site in Appendix E in the form of a 12-month by 24-hour (12 x 24) matrix, and generally presented in Figure 5-1 below. It is noted that the uncertainty associated with the prediction of any given month or hour of day is significantly greater than that associated with the prediction of the annual energy production.

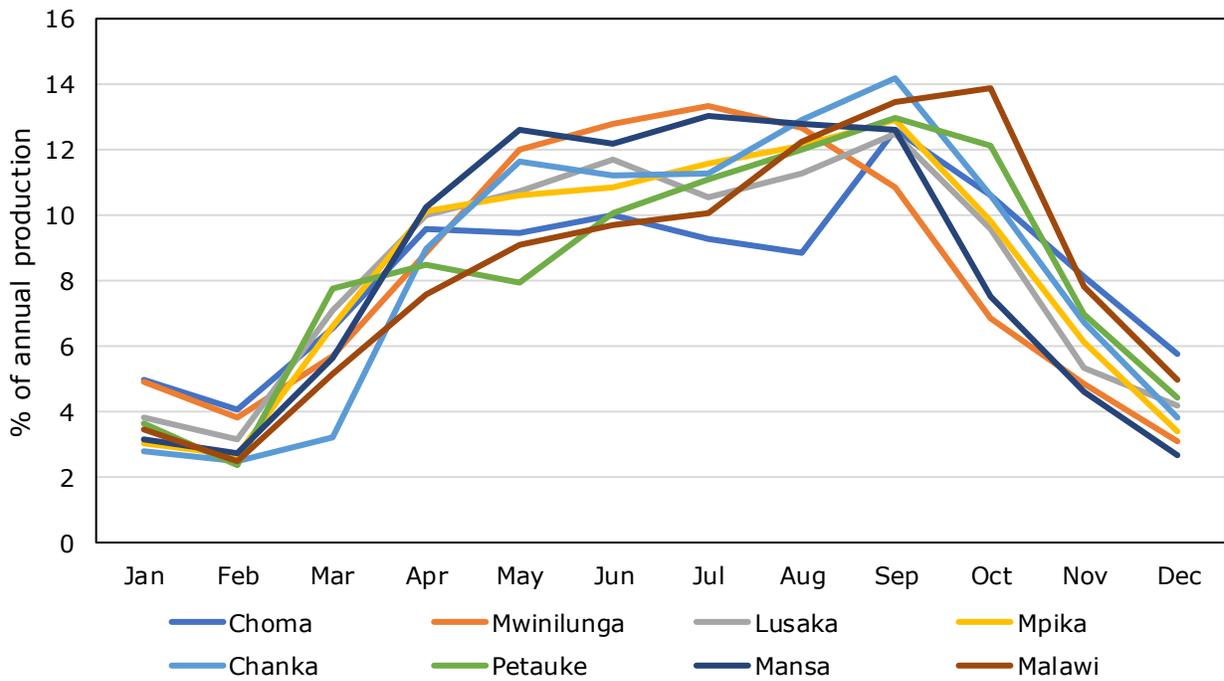


Figure 5-1 Annual energy production profiles

6 UNCERTAINTY

The main sources of deviation from the central estimate (P50) have been quantified and combined using a probabilistic model, assuming full independence between the sources. The results of the probabilistic simulation of net energy production are summarized for the Generic 4 MW scenario in Table 6-1 and detailed in Appendix F. The average calculated sensitivity ratio for variations of 10% on wind speed is shown in Table 6-2.

Table 6-1 Summary of project net average energy production for each site

Site	Choma, [GWh/annum]		Mwinilunga, [GWh/annum]		Lusaka, [GWh/annum]		Mpika, [GWh/annum]	
	1-Year	10-year average	1-Year	10-year average	1-Year	10-year average	1-Year	10-year average
50%	303.1	303.0	323.7	323.3	386.7	386.0	320.5	320.3
75%	266.7	276.2	289.2	297.0	346.0	353.9	282.3	292.1
90%	233.2	251.8	256.2	272.4	306.8	323.3	246.9	266.5
95%	213.3	236.8	235.7	257.0	282.2	304.7	225.3	250.5
99%	176.8	209.2	196.5	227.6	236.0	268.1	185.9	222.6

Site	Chanka, [GWh/annum]		Petauke, [GWh/annum]		Mansa, [GWh/annum]		Malawi, [GWh/annum]	
	1-Year	10-year average	1-Year	10-year average	1-Year	10-year average	1-Year	10-year average
50%	346.4	345.6	291.2	291.5	314.7	314.7	303.7	303.7
75%	303.0	311.2	253.0	261.5	278.2	286.4	265.8	274.2
90%	261.3	279.9	217.3	233.6	243.6	260.6	230.3	247.3
95%	236.2	260.3	196.4	217.2	222.7	244.5	209.0	230.5
99%	189.5	223.3	158.1	186.3	183.3	214.2	170.7	201.7

Table 6-2 Site average sensitivity ratios

Site	Sensitivity ratio
Choma	2.04
Mwinilunga	1.67
Lusaka	1.53
Mpika	2.00
Chanka	1.87
Petauke	2.06
Mansa	1.84
Malawi	1.97

7 SITE CONDITIONS

The site meteorological conditions assessment reported here uses inputs and analysis detailed in the energy production assessment of each site, and it is recommended that this is considered in conjunction with the present report.

It is noted that this report provides a comparison of the on-site meteorological conditions to the limits of the wind class, using the assumption that all the sites are Class IIIA. A generic turbine power curve has been used in this assessment, and therefore, a conclusion on the suitability of the turbine is not appropriate. However, it is recommended that the turbine manufacturer being considered for each site considers suitable margins in the context of confirming turbine suitability, turbine supply agreement and warranties, and that the results of this assessment are reviewed with consideration of the inherent uncertainties.

7.1 Turbulence Intensity

7.1.1 Frandsen design equivalent turbulence intensity at the turbine locations

Fatigue loading on wind turbines and their support structures is primarily the result of stochastic loading, originating from wind turbulence. In order to fully capture the turbulence conditions for the purposes of such load calculations, the cumulative effect of the ambient flow characteristics of the site and the wind farm must be taken into account, as differing layout spacing will result in differing fatigue loading for deeply embedded turbines. According to IEC 61400-1 [4], increased loading due to turbine wakes can be represented through the use of effective turbulence intensity, as defined by Frandsen [5]. This parameter characterises the effect of loading of ambient and wake induced turbulence.

The Frandsen methodology is one of several methods accepted for certification studies. This methodology is based on the calculation of an effective turbulence intensity that accounts for both wake and non-wake turbulence intensity contributions. For a given wind speed, an effective turbulence intensity is calculated based on the ambient measured turbulence intensity at a representative mast location and the proximity of neighbouring turbines and results in a curve of turbulence intensity against wind speed.

One of the main input parameters in this model is the thrust coefficient curve of the specific turbine model under consideration. The thrust curve for the generic turbine model under consideration has been generated by DNV GL. Therefore, the turbulence intensity estimates using the Frandsen methodology in this analysis should be considered indicative only, as they do not represent a specific turbine model in the market at present. However, the indicative results can be used to gauge possible levels of effective turbulence at each of the site locations.

The individual effective turbulence values for all turbines at the sites are presented in Appendix G. These tables show any turbines that are predicted to exceed IEC subclass A for wind speeds within the $0.2V_{ref}$ to $0.4V_{ref}$ range, and turbines which exceed the profile at lower wind speeds. It is noted that there is a low data coverage of measurements available to define the turbulence intensity profile at high wind speeds, leading to increased uncertainty in these values. The site minimum, maximum and average profiles for the Mpika mast are presented in Figure 7-1 along with the profiles for the turbulence subclasses. Refer to Appendix G for all of the masts.



It is recommended that turbine suppliers be approached at an early stage to gain approval for the proposed layout and to ensure that sufficient warranty provisions are in place to address the predicted effective turbulence at each site.


It should also be noted that the Frandsen method is a generic means of estimating design equivalent turbulence intensity, and there is scope for uncertainty in its application to the specific site and turbine type considered in this study. A list of potential sources of uncertainty that should be considered when interpreting the results for load analysis is provided below:

- Statistical scatter in the turbulence at any mean wind speed and consequent non-linear impacts on wind turbine loads.
- Non-linear behaviour of the turbine, most notably in the control system and the aerodynamics. Explicit time-domain simulations would be required to model these effects.
- It should be noted that the predictions of ambient turbulence intensity as input to the representative turbulence calculations rely on the assumption that the standard deviation of wind speed recorded at the mast location remains constant over the site area. Therefore, it is important that the mast is reasonably representative of the turbine locations. Due to this assumption, the predictions do not include any estimation of the effects of the varying ground roughness around the turbines.
- The effective turbulence intensity values estimated by the Frandsen method do not account for all the environmental parameters which influence turbine loads. The effect of wind shear, upflow angles and air density should all be included if a more rigorous load analysis is required. This would be achieved through explicit time-domain load simulations of the turbine on the site of interest.
- It is noted that DNV GL has assumed a Wöhler coefficient of 10 to be appropriate for this calculation, as it is understood that the turbine blades will likely consist of glass fibre.
- The fatigue loading of a wind turbine is, in general, not a simple direct function of turbulence intensity but depends on other sources of loading including, but not limited to, gravity, centrifugal loads and dynamic response.
- The specific implementation used for the calculation has a relevant influence on the results. It should be noted that DNV GL considered only generic turbine thrust curves and not a specific turbine curve.

Due to these issues the turbulence predictions presented should be reviewed with consideration of the inherent assumptions and large uncertainties.

It should be noted that the Frandsen method provides only an estimate of the loading levels to be experienced at the turbine locations. For a detailed study of the fatigue loading at the turbines, explicit time-domain simulations would be required.

Figure 7-1 Predicted profiles of site minimum, maximum and average design equivalent turbulence intensity for the Mpika site using a Generic 4.0 MW wind turbine at a hub height of 130 m

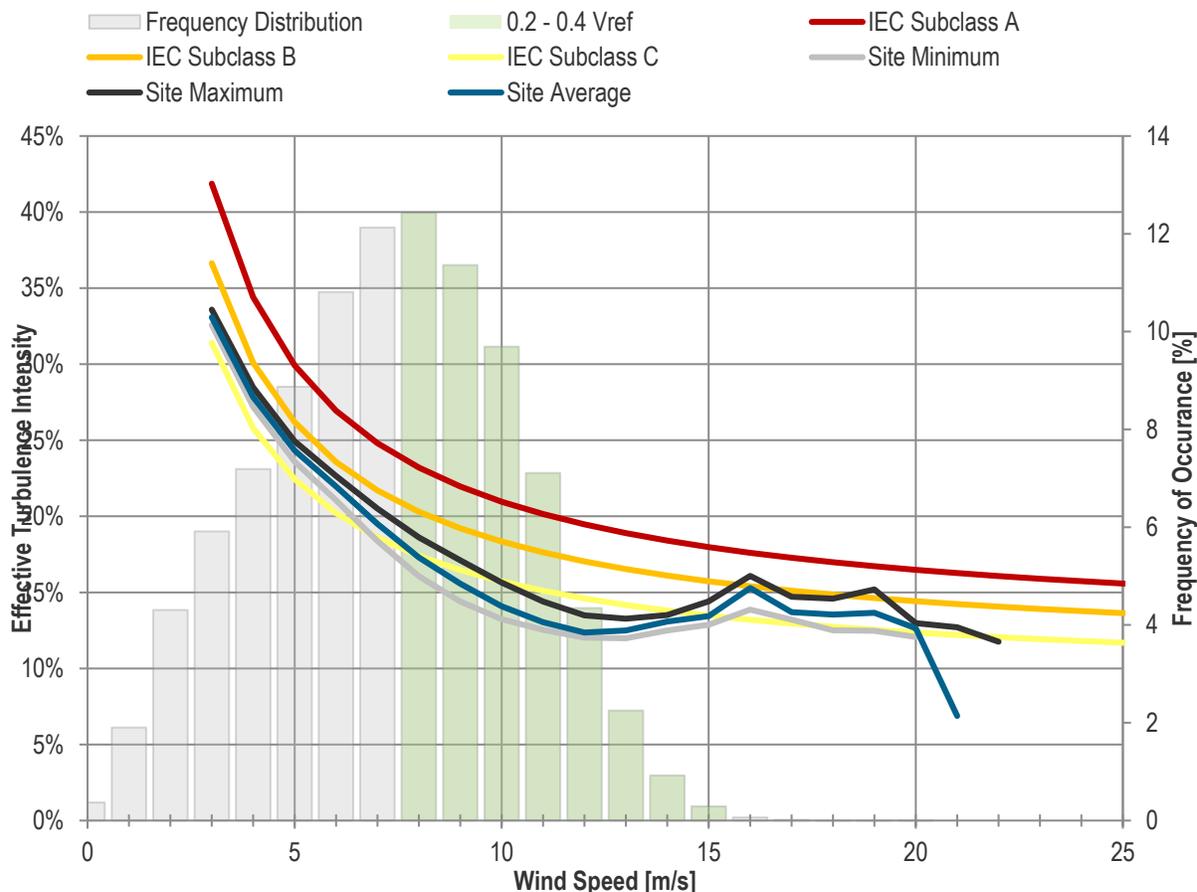

7.1.2 Uncertainty in turbulence prediction

It should be noted that all the predictions of turbulence intensity, ambient and design equivalent, rely on the assumption that the standard deviation of wind speed recorded at the site mast location remains constant over the area of the site with respect to the measured values, is representative of the turbine locations, and does not vary with height.

This standard assumption inherently implies that the turbulence predictions do not explicitly account for the effects of the varying ground roughness around the turbines i.e. this is only modelled through the associated variations in mean wind speeds. Therefore, it is important that the mast is reasonably representative of the turbine locations.

7.2 Extreme wind speeds

The extreme wind speed at a site is best determined by a Method of Independent Storms (MIS) or Gumbel analysis, using data recorded at the site over a period of at least 7 years. At the sites, approximately one

year of 10-minute mean wind speed data were available. This period is less than ideal to obtain an accurate prediction. Despite this, estimates using the MIS method are provided below but it should be noted that the estimates are subject to a very high level of uncertainty given the limited on-site measurement period.

Furthermore, for indicative purposes the maximum value recorded on site is presented in Section 7.2.2.

7.2.1 Method of Independent Storms (MIS)

DNV GL has undertaken a Gumbel analysis, using the Method of Independent Storms (MIS) defined by Cook [6] and further developed by Harris [7][8]. This method has been employed to provide an estimate based on the measured data available at the site masts, as detailed below.

It is possible to use the Method of Independent Storms (MIS) to determine a 10-minute mean extreme wind speed for a return period of 50 years from a continuous time series. Guidance within Cook recommends that a data set of at least 7 years' duration is ideally used for an MIS analysis. As the site dataset used in this analysis is limited to a single year, caution must be exercised in the interpretation of the extreme gust wind speeds determined from this analysis. Using the code and inputs described above, DNV GL has undertaken an MIS analysis as follows.

The measured time series at the masts were extrapolated to the proposed hub height of 130 m using time series based shear method, in order to derive a continuous time series at hub height at each mast location.

Applying the MIS procedure to these time series, the extreme 10-minute mean wind speed for a return period of 50 years was estimated at the locations of the mast.

The predicted 10 minute and 3 second gust extreme wind speeds for each mast are presented in Table 7-1. The 3 second gust wind speeds were predicted by applying appropriate wind speed ratios to the extreme 10-minute wind speeds.

The highest extreme 10-minute mean and 3 second gust obtained from the MIS analysis, over a 50-year return period, are predicted to be 25.0 m/s at the Chanka mast and 42.0 m/s at the Petauke mast, respectively.

It is however noted that there are no values exceeding the IEC Class III for 10-minute average and 3-second gust extreme wind speed thresholds.

Table 7-1 Predicted extreme wind speeds by Method of Independent Storms (MIS) at selected turbine locations

Turbine ID	Maximum 10-minute mean with a return period of 50 years at 130 m [m/s]	Maximum 3-sec gust with a return period of 50 years at 130 m [m/s]
Choma	24.0	40.0
Mwinilunga	20.0	37.5
Lusaka	23.5	40.5
Mpika	21.5	31.5
Chanka	25.0	40.0
Petauke	22.0	42.0
Mansa	24.0	36.0
Malawi	21.5	34.5
Class III limit	37.5	52.5

7.2.2 Extreme wind speeds recorded at the masts

A review of the maximum wind speeds recorded on site was also undertaken. The loggers installed at the masts have been programmed to record 1-second gust values and 10-minute averages.

The Wieringa equation has been used to derive a conversion factor to adjust the predicted 1-second gusts measured at the mast location to 3-second gusts. The Wieringa equation is defined as follows:

$$\gamma_t(t) = 1 + 0.42 \times I \times \ln\left(\frac{T}{t}\right)$$

- Where: γ_t is the gust ratio;
 I is the turbulence intensity;
 T is the averaging period in seconds;
 t is the gust period in seconds.

Using the measured period at the masts, the maximum 10-minute mean wind speed and the maximum 3-second gust wind speed are provided in Table 7-2.

Table 7-2 Maximum 10-min and 3-sec wind speeds at mast locations

Turbine ID	Maximum 10-minute mean wind speed at Mast at 130 m [m/s]	Maximum 3-sec measured at Mast at 80 m [m/s]
Choma	20.5	28.4
Mwinilunga	17.9	27.6
Lusaka	21.2	26.9
Mpika	18.7	25.3
Chanka	19.9	27.7
Petauke	18.6	31.5
Mansa	20.7	23.8
Malawi	19.0	25.2

8 OBSERVATIONS AND RECOMMENDATIONS

DNV GL makes the following observations and recommendations regarding this analysis:

1. The met masts were sited in their current locations primarily for the purpose of validating the national wind atlas, upon completion of 24-months of data acquisition. Some of the locations may also be suitable for large scale wind development, but not all are ideal for this purpose. As such, DNV GL recommends that stakeholders wishing to develop a wind project in Zambia not restrict their site selection to the eight mast locations, as there is wind energy potential in locations across the country that are not currently well-represented by a met mast.
2. Based on approximately one year of wind data, DNV GL evaluated the representativeness of the on-site data to the long-term wind regime based on DNV GL VMD, the ERA-Interim data set and the MERRA-2 data set. Where applicable, long-term adjustments were applied to the on-site wind data to adjust the data to represent long-term expectations. It is noted that there is a lack of viable ground-station reference data to evaluate the consistency of the reanalysis and virtual datasets considered in this assessment. For this reason, there is increased uncertainty in the long-term wind regime at each site, which has been considered in the uncertainty analysis.
3. DNV GL evaluated the measured wind shear at the masts. DNV GL applied the measured wind shear at each mast to the upper-level wind speeds on a timeseries basis to estimate hub height wind speeds. Thermal heating and cooling at the surface results in relatively high magnitudes of measured wind shear at some of the met masts. There is uncertainty that the wind shear measured at the met masts will remain constant with increasing altitude, and this uncertainty is higher when the estimated wind shear exponents are higher. DNV GL would recommend the use of remote sensing for site prospecting in Zambia, in order to more accurately characterize the vertical wind speed profile. Remote sensing measurements will further the understanding of the vertical wind speed profile and has the potential to drastically reduce the vertical extrapolation uncertainty, especially at sites where the extrapolation distance is large.
4. The table below summarizes the measured mast height wind speeds, long-term mast height wind speeds, and long-term hub height wind speeds at each of the eight met mast locations.

Mast	Measured mean wind speed at mast height [m/s]	Long-term mean wind speed at mast height [m/s]	Long-term hub height mean wind speed [m/s]
Choma	6.5	6.6	7.4
Mwinilunga	6.0	6.0	7.4
Lusaka	6.2	6.5	7.9
Mpika	6.2	6.3	7.3
Chanka	6.5	6.6	7.4
Petauke	5.7	5.7	6.5
Mansa	5.8	5.9	6.9
Malawi	5.8	5.8	6.9

5. The average horizontal extrapolation distances across the eight sites ranges from 3.6 km at Mpika to 24.1 km at Chanka. It should be noted that WAsP calculations have high uncertainties when calculations: extend over large spatial distances; are initiated from positions with markedly different elevations, wind climates or exposure to those of the proposed turbine locations. The WAsP wind flow model is also not suited to stable atmospheric conditions. For further wind assessments studies

in Zambia, DNV GL would recommend the use of CFD wind flow modeling to decrease horizontal extrapolation uncertainties.

6. The power curve used in this analysis represents a blended generic turbine model that has been generated by DNV GL. Given the preliminary nature of the generic power curve used in this assessment, DNV GL recommends that potential stakeholders conduct a thorough market review of available technologies when assessing a potential wind farm site in Zambia.
7. There are a number of losses and uncertainties for which DNV GL's standard assumptions have been made at this stage, or for which an analysis was out of DNV GL's scope of work. It is recommended that The World Bank considers each of the loss categories carefully when using the results in this report for stakeholder engagement. They may vary materially from standard assumptions and can often be mitigated to some extent, especially in early years of the project, through appropriate contractual provisions.
8. DNV GL notes the following observations and opinions regarding uncertainty.
 - a. Aside from inter-annual variability, the uncertainty in the analysis is driven by spatial extrapolation and the vertical extrapolation from mast height to hub height.
 - b. DNV GL recommends that all proposed turbine locations be within 2 km of a measurement mast that is at least $\frac{3}{4}$ of the proposed hub height and that wind measurements are conducted to fully represent typical turbine exposures and reasonably characterize the expected range of the wind climate on site. The distance criterion is generally not met and some turbines are located as far as 24 km from the nearest mast. The height criterion has also not been met for a suggested hub height of 130 m. DNV GL recommends that future development in Zambia be conducted in accordance with the guidelines set forth above, so as to minimize the uncertainty in future energy production estimates.
 - c. The wind speed predictions have been based on WAsP modeling, which provides elevated uncertainty in predicting the wind flow variation across the sites over large extrapolation distances or complex terrain.
9. The results of the energy production assessments are provided in the tables below.

Site	Choma	Mwinilunga	Lusaka	Mpika
Probability of exceedance	10-year average [GWh/annum]			
50%	303.0	323.3	386.0	320.3
75%	276.2	297.0	353.9	292.1
90%	251.8	272.4	323.3	266.5
95%	236.8	257.0	304.7	250.5
99%	209.2	227.6	268.1	222.6

Site	Chanka	Petauke	Mansa	Malawi
Probability of exceedance	10-year average [GWh/annum]			
50%	345.6	291.5	314.7	303.7
75%	311.2	261.5	286.4	274.2
90%	279.9	233.6	260.6	247.3
95%	260.3	217.2	244.5	230.5
99%	223.3	186.3	214.2	201.7

9 CONCLUSION

The overall Zambia ESMAP program consists of providing a validated mesoscale wind atlas for Zambia, including associated deliverables and wind energy development training courses. Meteorological data is collected at eight sites over a 2-year period. This 12-month Site Resource Report provides interim wind resource statistics at the eight masts and energy production estimates for preliminary wind farms in the vicinity of the masts. The program's goal is to provide Zambian policy makers, stakeholders and independent power producers with accurate and valuable knowledge of the national wind resource, including complementary tools, which can be of direct practical use, both for formulating energy policy and implementing wind projects.

A key conclusion from this study is that there is now an established network of state-of-the-art wind measurement masts in Zambia that can be used to support stakeholder wind analysis activities and future utility-scale wind development in-country. In the future, this network of masts will also provide the industry with a source of long-term reference station data which could greatly reduce uncertainties for potential developers. The data collected from the eight met masts are considered very good both in terms of data quality and data coverage. The primary goal of the met masts was not to provide potential wind farm locations, but instead to validate a country-wide wind map. However, and as a secondary goal, it is noted that from this analysis, several met mast locations are sited in areas where wind development could be considered viable and potentially bankable with current turbine technology. Further investment by stakeholders in well-organized measurement campaigns and in feasibility analysis that are focused on reducing uncertainties will help support future growth of the Zambian wind market.



10 REFERENCES

- [1] IEC 61400-12-1:2005(E), "Wind turbines - Part 12-1: Power performance measurements of electricity producing wind turbines."
- [2] Mast Commissioning Reports, 10003564-USSD-R04 to R12, Rev A, March 2017, by DNV GL (one individual report per mast).
- [3] Candidate Site Identification Report, 702833-USSD-R01-C, 22 December 2014, DNV GL.
- [4] IEC 61400-1:2005/A1:2010 (E): 61400-1 Ed3 Amendment 1: Wind turbines – Part 1: Design requirements.
- [5] "Turbulence and turbulence-generated fatigue loading in wind turbine clusters", S Frandsen, Riso-R-1188(EN), July 2003.
- [6] Cook N J, "The Designer's Guide to Wind Loading of Building Structures", Butterworths 1985.
- [7] Harris I, "Gumbel revisited: A new look at extreme value statistics applied to wind speeds", Journal of Wind Engineering and Industrial Aerodynamics 59, 1996.
- [8] Harris I, "Improvements to the Method of Independent Storms", Journal of Wind Engineering and Industrial Aerodynamics 80, 1999.



APPENDIX A WIND DATA STATISTICS

Choma Monthly Statistics and Data Coverage

Height [m]	Month				Mean wind speed [m/s]				Wind speed data coverage [%]					Wind direction data coverage [%]				
	80 ¹	80 ¹	60 ²	60 ²	42 ³	42 ³	20 ⁴	20 ⁴	80 ¹	80 ¹	60 ²	60 ²	42 ³	42 ³	20 ⁴	20 ⁴	77	58
Nov-16	6.6	6.6	6.1	6.1	5.5	5.5	4.3	4.4	97	97	97	97	97	97	97	97	97	97
Dec-16	5.3	5.3	4.9	4.9	4.4	4.4	3.4	3.5	100	100	100	100	100	100	100	100	100	100
Jan-17	5.0	5.0	4.6	4.6	4.1	4.2	3.3	3.3	100	100	100	100	100	100	100	100	100	100
Feb-17	5.1	5.1	4.6	4.7	4.1	4.2	3.2	3.2	100	100	100	100	100	100	100	100	100	100
Mar-17	5.6	5.7	5.2	5.3	4.7	4.8	3.7	3.8	100	100	100	100	100	100	100	100	100	100
Apr-17	6.8	6.9	6.3	6.4	5.6	5.7	4.3	4.3	100	100	100	100	100	100	100	100	100	100
May-17	6.5	6.5	6.1	6.2	5.5	5.5	4.0	4.1	100	100	100	100	100	100	100	100	100	100
Jun-17	6.9	6.9	6.4	6.5	5.8	5.8	4.2	4.3	100	100	100	100	100	100	100	100	100	100
Jul-17	6.5	6.5	6.1	6.1	5.5	5.5	4.1	4.2	100	100	100	100	100	100	100	100	100	100
Aug-17	6.6	6.5	6.1	6.1	5.5	5.5	4.2	4.3	90	100	90	100	90	100	100	100	91	91
Sep-17	7.9	7.7	7.3	7.2	6.5	6.4	4.8	4.9	61	100	61	100	61	100	100	100	61	61
Oct-17	7.0	7.0	6.5	6.5	5.8	5.8	4.5	4.5	100	100	100	100	100	100	100	100	100	100
Nov-17	6.0	6.0	5.5	5.5	4.9	5.0	3.8	3.9	100	100	100	100	100	100	100	100	100	100
Dec-17	5.5	5.5	5.1	5.1	4.6	4.6	3.5	3.6	100	100	100	100	100	100	100	100	100	100
Jan-18	5.6	5.6	5.3	5.3	4.8	4.8	3.7	3.7	31	31	31	31	31	31	31	31	31	31

Mwinilunga Monthly Statistics and Data Coverage

Height [m]	Month				Mean wind speed [m/s]				Wind speed data coverage [%]					Wind direction data coverage [%]				
	80 ¹	80 ¹	60 ²	60 ²	41 ³	41 ³	20 ⁴	20 ⁴	80 ¹	80 ¹	60 ²	60 ²	42 ³	42 ³	20 ⁴	20 ⁴	77	58
Dec-16	4.1	4.1	3.7	3.8	3.2	3.3	2.4	2.4	92	92	92	92	92	92	92	92	92	92
Jan-17	4.8	4.8	4.3	4.3	3.6	3.7	2.6	2.7	100	100	100	100	100	100	100	100	100	100
Feb-17	4.5	4.6	4.0	4.1	3.4	3.5	2.6	2.6	100	100	100	100	100	100	100	100	100	100
Mar-17	5.0	5.1	4.5	4.5	3.8	3.9	2.7	2.8	100	100	100	100	100	100	100	100	100	100
Apr-17	6.4	6.5	5.7	5.8	4.8	4.9	3.3	3.4	100	100	100	100	100	100	100	100	100	100
May-17	7.3	7.3	6.4	6.5	5.3	5.4	3.4	3.6	100	100	100	100	100	100	100	100	100	100
Jun-17	7.7	7.7	6.7	6.8	5.6	5.6	3.6	3.7	100	100	100	100	100	100	100	100	100	100
Jul-17	7.7	7.8	6.8	6.9	5.6	5.7	3.7	3.8	100	100	100	100	100	100	100	100	100	100
Aug-17	7.5	7.5	6.6	6.7	5.5	5.6	3.7	3.8	100	100	100	100	100	100	100	100	100	100
Sep-17	7.0	7.1	6.3	6.3	5.3	5.3	3.5	3.6	100	100	100	100	100	100	100	100	100	100
Oct-17	5.5	5.5	4.9	5.0	4.2	4.3	3.0	3.1	100	100	100	100	100	100	100	100	100	100
Nov-17	4.9	4.9	4.4	4.4	3.7	3.8	2.7	2.8	100	100	100	100	100	100	100	100	100	100
Dec-17	4.1	4.1	3.7	3.8	3.2	3.2	2.4	2.4	100	100	100	100	100	100	100	100	100	100
Jan-18	4.7	4.7	4.2	4.3	3.6	3.7	2.8	2.9	28	28	28	28	28	28	28	28	28	28

Lusaka Monthly Statistics and Data Coverage

Height [m]	Month		Mean wind speed [m/s]						Wind speed data coverage [%]					Wind direction data coverage [%]				
	80 ¹	80 ¹	60 ²	60 ²	41 ³	41 ³	20 ⁴	20 ⁴	80 ¹	80 ¹	60 ²	60 ²	42 ³	42 ³	20 ⁴	20 ⁴	77	58
Nov-16	4.7	4.8	4.3	4.4	3.7	3.8	2.9	2.9	31	31	31	31	31	31	31	31	31	31
Dec-16	4.5	4.6	4.1	4.1	3.5	3.6	2.6	2.6	100	100	100	100	100	100	100	100	100	100
Jan-17	4.4	4.5	4.0	4.0	3.4	3.5	2.5	2.5	100	100	100	100	100	100	100	100	100	100
Feb-17	4.3	4.4	3.9	4.0	3.4	3.4	2.4	2.4	100	100	100	100	100	100	100	100	100	100
Mar-17	5.6	5.7	5.0	5.0	4.2	4.3	3.0	3.0	100	100	100	100	100	100	100	100	100	100
Apr-17	6.8	6.9	6.0	6.0	5.0	5.1	3.5	3.6	100	100	100	100	100	100	100	100	100	100
May-17	6.9	6.9	6.1	6.1	5.0	5.1	3.4	3.5	100	100	100	100	100	100	100	100	100	100
Jun-17	7.6	7.6	6.7	6.7	5.5	5.6	3.6	3.7	100	100	100	100	100	100	100	100	100	100
Jul-17	6.9	6.9	6.2	6.2	5.2	5.2	3.5	3.6	100	100	100	100	100	100	100	100	100	100
Aug-17	7.2	7.2	6.4	6.4	5.4	5.5	3.8	3.8	100	100	100	100	100	100	100	100	100	100
Sep-17	7.9	7.9	7.0	7.0	5.9	5.9	4.1	4.2	100	100	100	100	100	100	100	100	100	100
Oct-17	6.7	6.7	5.9	6.0	5.0	5.1	3.6	3.7	98	98	98	98	98	98	98	98	98	98
Nov-17	5.3	5.3	4.8	4.8	4.1	4.2	3.0	3.0	95	95	95	95	95	95	95	95	95	95
Dec-17	4.7	4.7	4.2	4.3	3.6	3.7	2.6	2.6	100	100	100	100	100	100	100	99	100	100
Jan-18	4.9	4.9	4.4	4.5	3.8	3.9	2.7	2.7	28	28	28	28	28	28	28	28	28	28

Mpika Monthly Statistics and Data Coverage

Height [m]	Month		Mean wind speed [m/s]						Wind speed data coverage [%]					Wind direction data coverage [%]				
	80 ¹	80 ¹	60 ²	60 ²	41 ³	41 ³	20 ⁴	20 ⁴	80 ¹	80 ¹	60 ²	60 ²	42 ³	42 ³	20 ⁴	20 ⁴	77	58
Nov-16	5.6	5.6	5.2	5.1	4.6	4.6	3.7	3.6	35	35	35	35	35	35	35	35	35	35
Dec-16	4.3	4.2	4.0	3.9	3.5	3.5	2.8	2.7	100	100	100	100	100	100	100	100	100	100
Jan-17	3.9	3.9	3.7	3.6	3.3	3.2	2.6	2.5	100	100	100	100	100	100	100	100	100	100
Feb-17	4.2	4.1	3.9	3.8	3.5	3.4	2.7	2.6	100	100	100	100	100	100	100	100	100	100
Mar-17	5.5	5.5	5.1	5.0	4.5	4.4	3.6	3.4	100	100	100	100	100	100	100	100	100	100
Apr-17	6.9	6.9	6.5	6.4	5.7	5.6	4.5	4.4	100	100	100	100	100	100	100	100	100	100
May-17	7.0	7.0	6.5	6.5	5.8	5.7	4.5	4.4	100	100	100	100	100	100	100	100	100	100
Jun-17	7.2	7.2	6.7	6.7	5.9	5.9	4.5	4.4	100	100	100	100	100	100	100	100	100	100
Jul-17	7.3	7.3	6.8	6.7	6.0	6.0	4.6	4.4	100	100	100	100	100	100	100	100	100	100
Aug-17	7.5	7.5	7.0	6.9	6.2	6.1	4.7	4.6	100	100	100	100	100	100	100	100	100	100
Sep-17	7.9	7.9	7.3	7.3	6.5	6.5	5.1	5.0	100	100	100	100	100	100	100	100	100	100
Oct-17	6.7	6.7	6.3	6.2	5.6	5.5	4.4	4.3	100	100	100	100	100	100	100	100	100	100
Nov-17	5.4	5.4	5.0	5.0	4.4	4.4	3.5	3.4	100	100	100	100	100	100	100	100	100	100
Dec-17	4.3	4.3	4.1	4.0	3.6	3.6	2.9	2.8	100	100	100	100	100	100	100	100	100	100
Jan-18	5.4	5.4	5.0	4.9	4.4	4.4	3.5	3.4	28	28	28	28	28	28	28	28	28	28

Chanka Monthly Statistics and Data Coverage

Height [m]	Month		Mean wind speed [m/s]						Wind speed data coverage [%]					Wind direction data coverage [%]				
	80 ¹	80 ¹	60 ²	60 ²	41 ³	41 ³	20 ⁴	20 ⁴	80 ¹	80 ¹	60 ²	60 ²	42 ³	42 ³	20 ⁴	20 ⁴	77	58
Nov-16	5.9	5.9	5.6	5.5	5.1	5.1	4.4	4.3	25	25	25	25	25	25	25	25	25	25
Dec-16	4.7	4.7	4.4	4.4	4.0	4.0	3.3	3.3	100	100	100	100	100	100	100	100	100	100
Jan-17	4.0	4.0	3.8	3.8	3.5	3.5	2.9	2.9	100	100	100	100	100	100	100	100	100	100
Feb-17	4.3	4.2	4.0	3.9	3.6	3.6	3.0	3.0	100	100	100	100	100	100	100	100	100	100
Mar-17	4.6	4.6	4.3	4.3	3.9	3.9	3.3	3.3	100	100	100	100	100	100	100	100	100	100
Apr-17	7.0	6.9	6.5	6.5	6.0	5.9	5.1	5.0	100	100	100	100	100	100	100	100	100	100
May-17	7.7	7.7	7.2	7.2	6.6	6.6	5.6	5.5	100	100	100	100	100	100	100	100	100	100
Jun-17	7.7	7.7	7.2	7.2	6.6	6.6	5.6	5.6	100	100	100	100	100	100	100	100	100	100
Jul-17	7.6	7.6	7.2	7.1	6.5	6.5	5.6	5.5	100	100	100	100	100	100	100	100	100	100
Aug-17	8.1	8.1	7.7	7.6	7.1	7.1	6.1	6.1	100	100	100	100	100	100	100	100	100	100
Sep-17	8.8	8.8	8.4	8.4	7.7	7.8	6.8	6.7	100	100	100	100	100	100	100	100	100	100
Oct-17	7.4	7.4	7.0	7.0	6.5	6.5	5.7	5.6	100	100	100	100	100	100	100	100	100	100
Nov-17	6.0	5.9	5.7	5.6	5.2	5.2	4.5	4.5	100	100	100	100	100	100	100	100	100	100
Dec-17	4.7	4.7	4.4	4.4	4.0	4.0	3.5	3.4	100	100	100	100	100	100	100	100	100	100
Jan-18	5.0	5.0	4.6	4.6	4.1	4.1	3.5	3.4	31	31	31	31	31	31	31	31	31	31

Petauke Monthly Statistics and Data Coverage

Height [m]	Month		Mean wind speed [m/s]						Wind speed data coverage [%]					Wind direction data coverage [%]				
	80 ¹	80 ¹	60 ²	60 ²	41 ³	41 ³	20 ⁴	20 ⁴	80 ¹	80 ¹	60 ²	60 ²	42 ³	42 ³	20 ⁴	20 ⁴	77	58
Dec-16	4.2	4.2	3.9	3.9	3.5	3.5	2.8	2.9	73	73	73	73	73	73	73	73	73	73
Jan-17	4.0	4.0	3.6	3.7	3.2	3.3	2.5	2.6	100	100	100	100	100	100	100	100	100	100
Feb-17	3.8	3.9	3.5	3.6	3.1	3.2	2.5	2.5	100	100	100	100	100	100	100	100	100	100
Mar-17	5.5	5.4	5.0	5.0	4.5	4.5	3.6	3.7	100	100	100	100	100	100	100	100	100	100
Apr-17	5.8	5.8	5.4	5.4	4.8	4.8	3.9	3.9	100	100	100	100	100	100	100	100	100	100
May-17	5.6	5.6	5.1	5.1	4.6	4.6	3.7	3.8	100	100	100	100	100	100	100	100	100	100
Jun-17	6.2	6.2	5.7	5.7	5.1	5.1	4.1	4.2	100	100	100	100	100	100	100	100	100	100
Jul-17	6.4	6.4	5.9	5.9	5.3	5.3	4.3	4.3	100	100	100	100	100	100	100	100	100	100
Aug-17	6.7	6.7	6.2	6.2	5.6	5.5	4.6	4.6	100	100	100	100	100	100	100	100	100	100
Sep-17	7.1	7.1	6.5	6.5	5.8	5.8	4.8	4.8	100	100	100	100	100	100	100	100	100	100
Oct-17	6.8	6.8	6.3	6.3	5.6	5.6	4.6	4.6	100	100	100	100	100	100	100	100	100	100
Nov-17	5.3	5.3	5.0	5.0	4.5	4.5	3.7	3.7	100	100	100	100	100	100	100	100	100	100
Dec-17	4.7	4.7	4.3	4.4	3.9	3.9	3.1	3.2	100	99	100	100	100	100	100	100	100	100
Jan-18	4.9	4.9	4.5	4.6	4.1	4.1	3.3	3.3	28	28	28	28	28	28	28	28	28	28

Mansa Monthly Statistics and Data Coverage

Height [m]	Month		Mean wind speed [m/s]						Wind speed data coverage [%]					Wind direction data coverage [%]				
	80 ¹	80 ¹	60 ²	60 ²	41 ³	41 ³	20 ⁴	20 ⁴	80 ¹	80 ¹	60 ²	60 ²	42 ³	42 ³	20 ⁴	20 ⁴	77	58
Nov-16	4.7	4.6	4.3	4.2	3.8	3.7	3.1	3.0	15	15	15	15	15	15	15	15	15	15
Dec-16	4.1	4.0	3.7	3.6	3.3	3.2	2.7	2.6	100	100	100	100	100	100	100	100	100	100
Jan-17	4.1	4.0	3.7	3.7	3.3	3.2	2.7	2.6	100	100	100	100	100	100	99	100	100	100
Feb-17	4.2	4.1	3.8	3.8	3.4	3.3	2.7	2.6	100	100	100	100	100	100	100	100	100	100
Mar-17	4.9	4.9	4.5	4.4	3.9	3.9	3.1	3.0	100	100	100	100	100	100	100	100	100	100
Apr-17	6.5	6.5	6.0	5.9	5.2	5.1	4.1	3.9	100	100	100	100	100	100	100	100	100	100
May-17	7.0	7.0	6.4	6.3	5.5	5.4	4.2	4.0	100	100	100	100	100	100	100	100	100	100
Jun-17	7.0	7.0	6.3	6.3	5.4	5.3	4.1	3.9	100	100	100	100	100	100	100	100	100	100
Jul-17	7.1	7.1	6.4	6.4	5.6	5.5	4.2	4.1	100	100	100	100	100	100	100	100	100	100
Aug-17	7.1	7.1	6.4	6.3	5.6	5.5	4.3	4.1	100	100	100	100	100	100	100	100	100	100
Sep-17	7.2	7.3	6.6	6.5	5.8	5.7	4.6	4.4	100	100	100	100	100	100	100	100	100	100
Oct-17	5.6	5.6	5.2	5.1	4.6	4.5	3.6	3.5	100	100	100	100	100	100	100	100	100	100
Nov-17	4.8	4.8	4.4	4.3	3.9	3.8	3.1	3.0	100	100	100	100	100	100	100	100	100	100
Dec-17	3.9	3.9	3.6	3.6	3.2	3.2	2.6	2.5	100	100	100	100	100	100	97	100	100	100
Jan-18	4.8	4.8	4.4	4.3	3.8	3.8	3.1	3.0	31	31	31	31	31	31	31	31	31	31

Malawi Monthly Statistics and Data Coverage

Height [m]	Month		Mean wind speed [m/s]						Wind speed data coverage [%]					Wind direction data coverage [%]				
	80 ¹	80 ¹	60 ²	60 ²	41 ³	41 ³	20 ⁴	20 ⁴	80 ¹	80 ¹	60 ²	60 ²	42 ³	42 ³	20 ⁴	20 ⁴	77	58
Dec-16	5.2	5.2	4.8	4.7	4.2	4.1	3.3	3.3	34	34	34	34	34	34	34	34	34	34
Jan-17	4.0	3.9	3.6	3.5	3.2	3.1	2.6	2.5	100	100	100	100	100	100	100	100	100	100
Feb-17	3.8	3.8	3.5	3.4	3.0	3.0	2.5	2.4	100	100	100	100	100	100	100	100	100	100
Mar-17	4.8	4.8	4.4	4.3	3.9	3.8	3.2	3.1	100	100	100	100	100	100	100	100	100	100
Apr-17	5.8	5.8	5.2	5.2	4.6	4.5	3.6	3.6	100	100	100	100	100	100	100	100	100	100
May-17	6.1	6.1	5.5	5.4	4.7	4.6	3.7	3.6	100	100	100	100	100	100	100	100	100	100
Jun-17	6.2	6.2	5.6	5.5	4.7	4.7	3.7	3.6	100	100	100	100	100	100	100	100	100	100
Jul-17	6.2	6.2	5.7	5.6	4.8	4.8	3.7	3.6	100	100	100	100	100	100	100	100	100	100
Aug-17	6.9	6.9	6.2	6.1	5.3	5.3	4.2	4.1	100	100	100	100	100	100	100	100	100	100
Sep-17	7.4	7.4	6.7	6.7	5.7	5.7	4.6	4.5	100	100	100	100	100	100	100	100	100	100
Oct-17	7.3	7.4	6.6	6.6	5.8	5.8	4.7	4.7	100	100	100	100	100	100	100	100	100	100
Nov-17	5.7	5.7	5.2	5.2	4.6	4.6	3.9	3.8	100	100	100	100	100	100	100	100	100	100
Dec-17	4.5	4.5	4.1	4.0	3.6	3.6	3.0	2.9	100	100	100	100	100	100	100	100	100	100
Jan-18	4.9	4.8	4.5	4.4	4.0	3.9	3.3	3.2	31	31	31	31	31	31	31	31	31	31

APPENDIX B REFERENCE STATIONS CONSIDERED

DNV GL Virtual Met Data (VMD)

The DNV GL Virtual Met Data (VMD) is developed from a mesoscale-model-based downscaling system that provides high-resolution long-term reference time series data for any location in the world. DNV GL VMD is primarily based on the Weather Research and Forecasting (WRF) Model, a mesoscale model developed and maintained by a consortium of more than 150 international agencies, laboratories, and universities. VMD is driven by a number of new high-resolution inputs, such as MERRA, global 25 km resolution 3-hourly and daily analyses of soil temperature and moisture, sea surface temperature, sea ice, and snow depth. A sophisticated land surface model predicts surface fluxes of heat and moisture to the atmosphere, reflected shortwave radiation, and longwave radiation emitted to the atmosphere. Data is typically produced as a virtual hourly time series on a 2 km horizontal resolution grid, centred on the subject wind farm site at the location of a met-mast on the site.

ERA-Interim Reanalysis data

DNV GL has considered ERA-Interim data as part of this analysis. The ECMWF Interim Reanalysis (ERA-Interim) is a global atmospheric reanalysis product of the European Centre for Medium-Range Weather Forecasts (ECMWF). The ERA-Interim dataset uses weather measurements from a number of sources as inputs to a numerical atmospheric model in order to produce a description of the state of the atmosphere, including wind speed. The analysis is performed at a spatial resolution of 0.75° longitude by 0.75° latitude with a 6 hourly temporal resolution. DNV GL has some concerns over the long-term consistency of reanalysis data, and hence in order to mitigate against potential inclusion of inconsistent data in the long-term analysis, DNV GL has considered the same long-term reference period for the ERA-Interim dataset as for the MERRA datasets, i.e. from January 2002 to the present. DNV GL procured 6-hourly time series of two-dimensional diagnostic data, at a surface height of 10 m for the nearest grid points near the project site.


MERRA-2 Reanalysis data


The Modern Era Retrospective-analysis for Research and Applications, Version 2 (MERRA-2) data set has been produced by the National Aeronautics and Space Administration (NASA) by assimilating satellite observations with conventional land-based meteorology measurement sources using the Goddard Earth Observing System Data Assimilation System Version 5.12.4 (GEOS-5.12.4) atmospheric data assimilation system. The analysis is performed at a spatial resolution of 0.625° longitude by 0.5° latitude. MERRA-2 replaces the MERRA dataset previously produced by NASA. DNV GL typically procures hourly time series of two-dimensional diagnostic data, at a surface height of 50 m for suitable grid cells near the project site.


DNV GL has some concerns over the long-term consistency of reanalysis data and has conducted investigations into the consistency of the MERRA-2 dataset close to the site. On the basis of these investigations the long-term reference period considered for the MERRA-2 dataset is from January 2002 to the present.





APPENDIX C WIND FARM SITE INFORMATION AND LAYOUTS

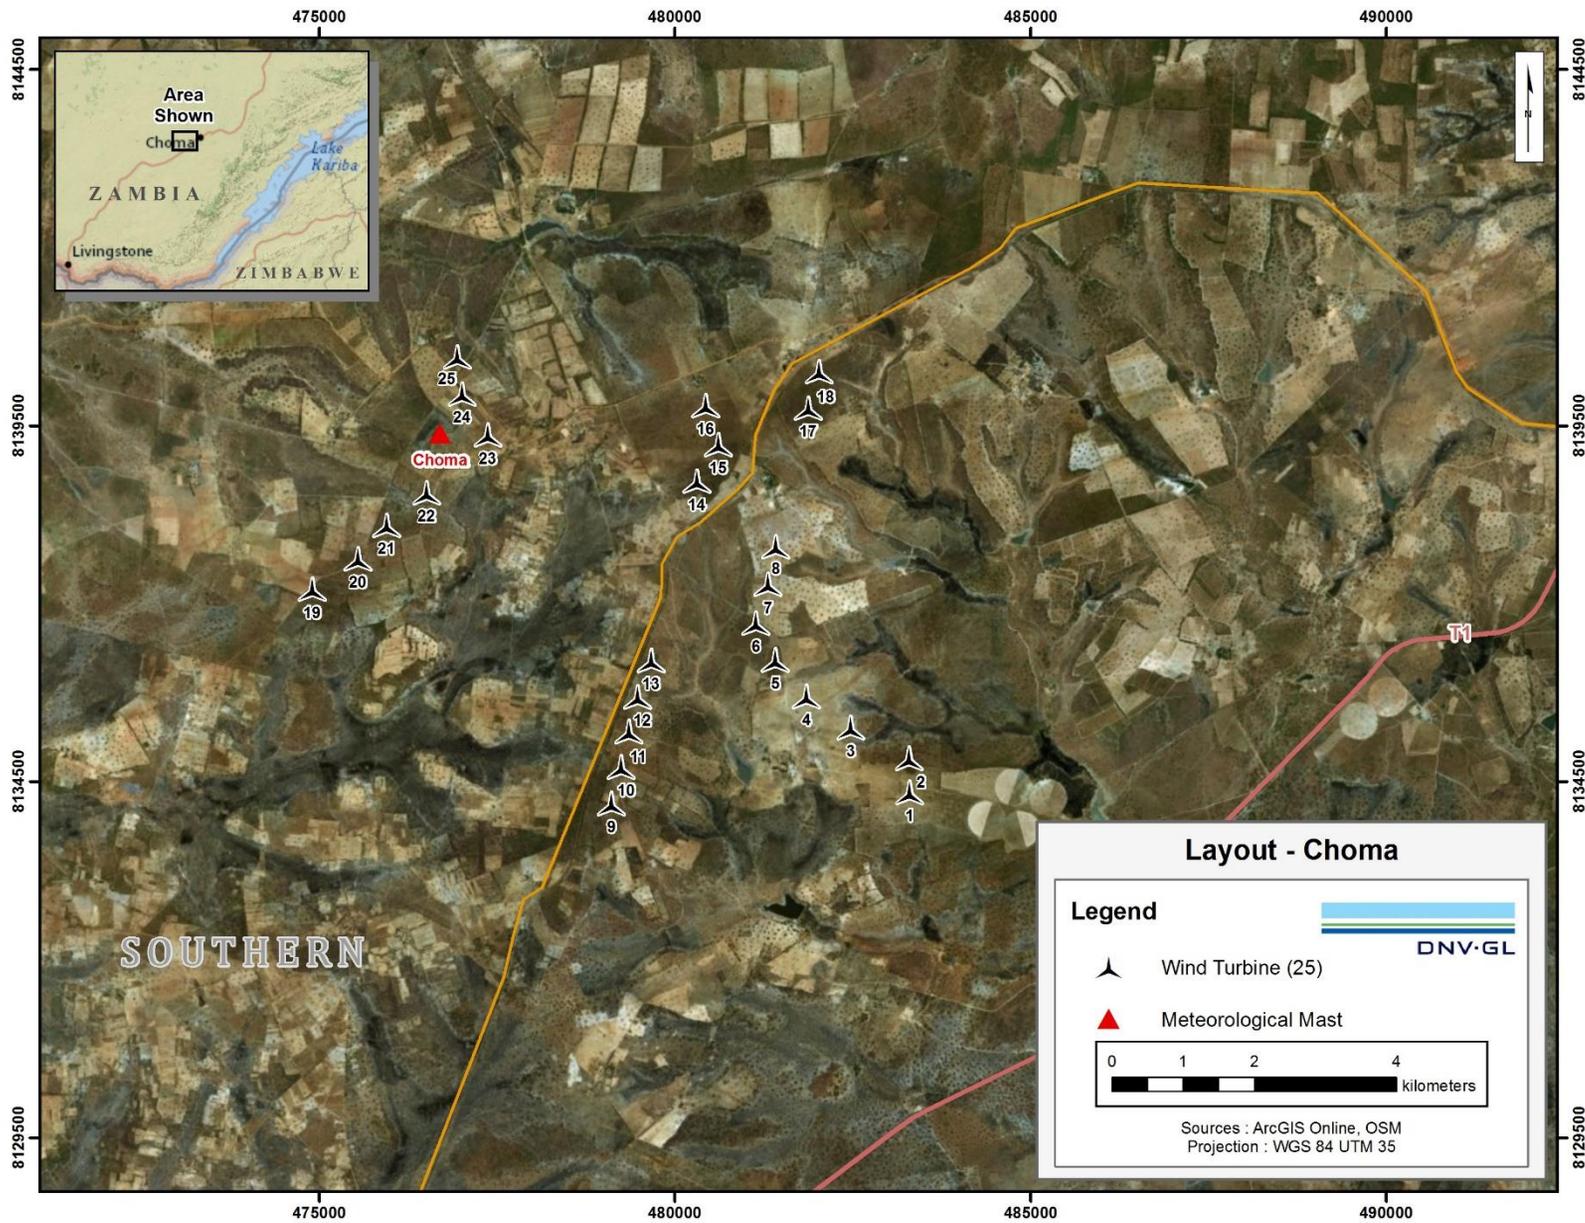


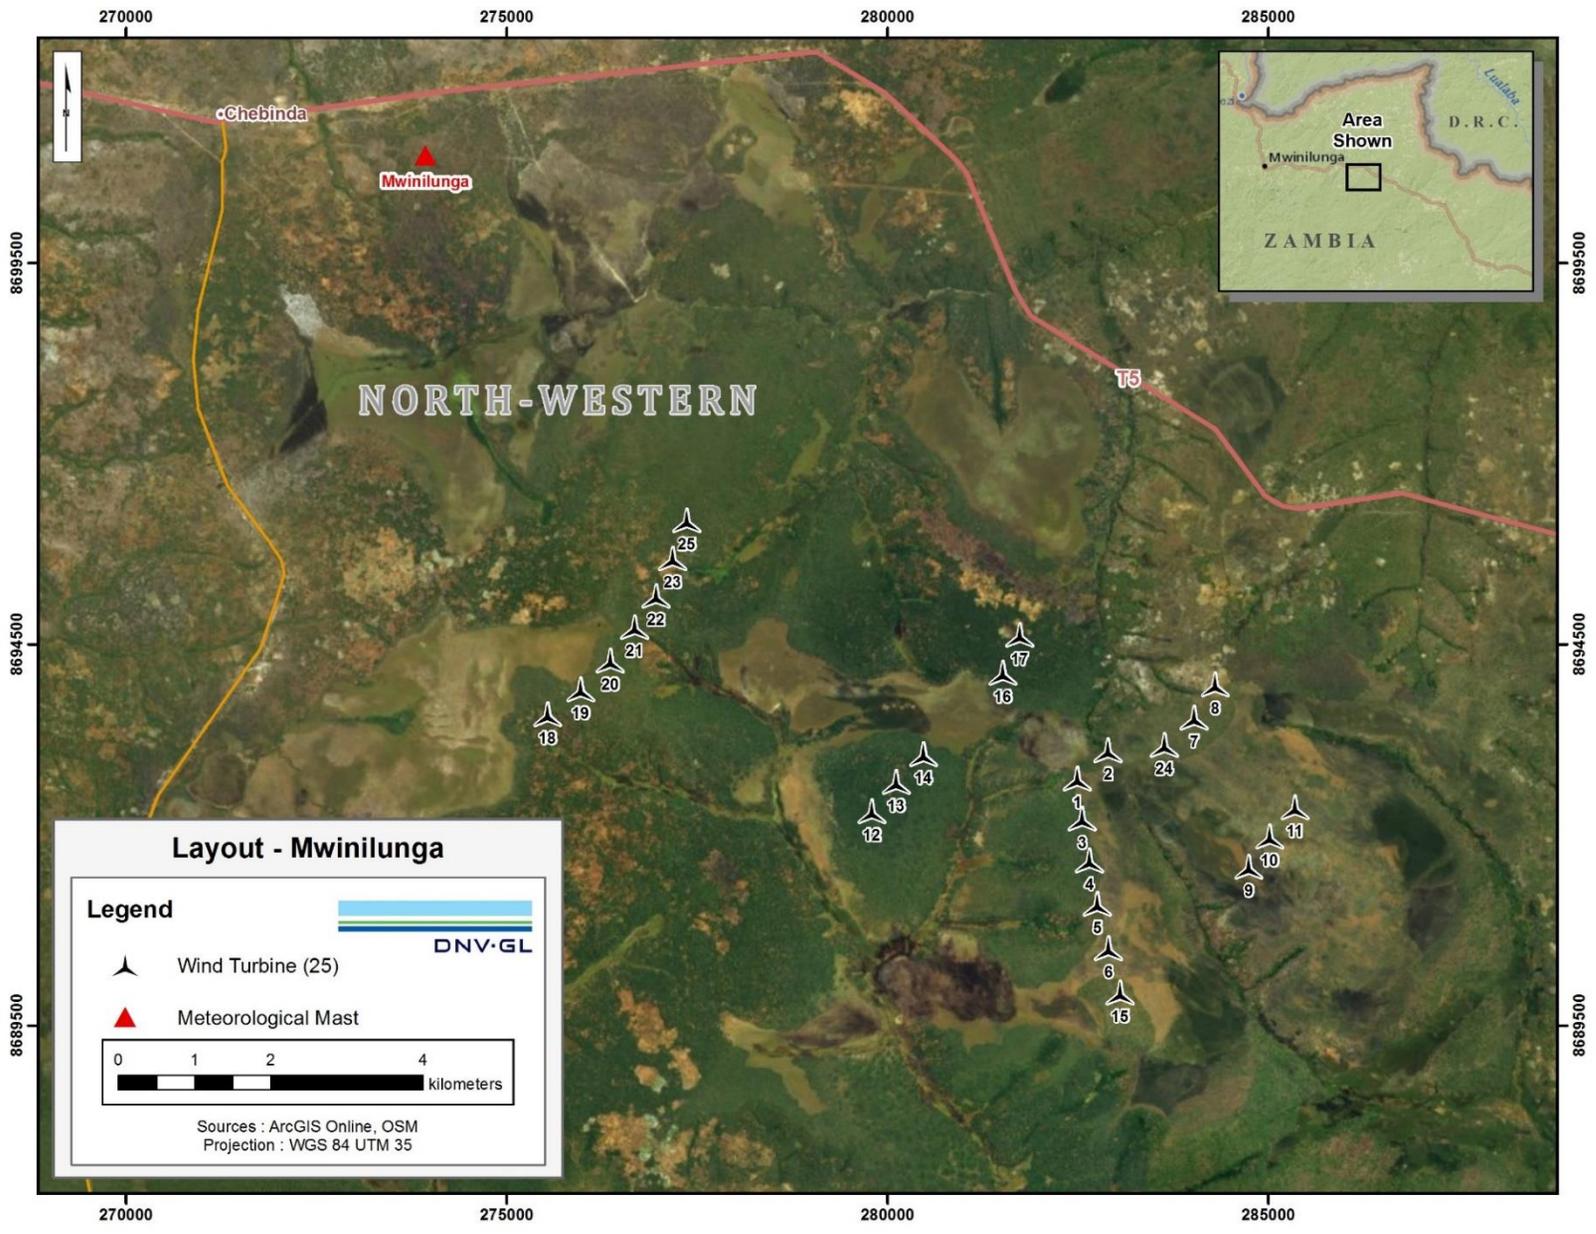


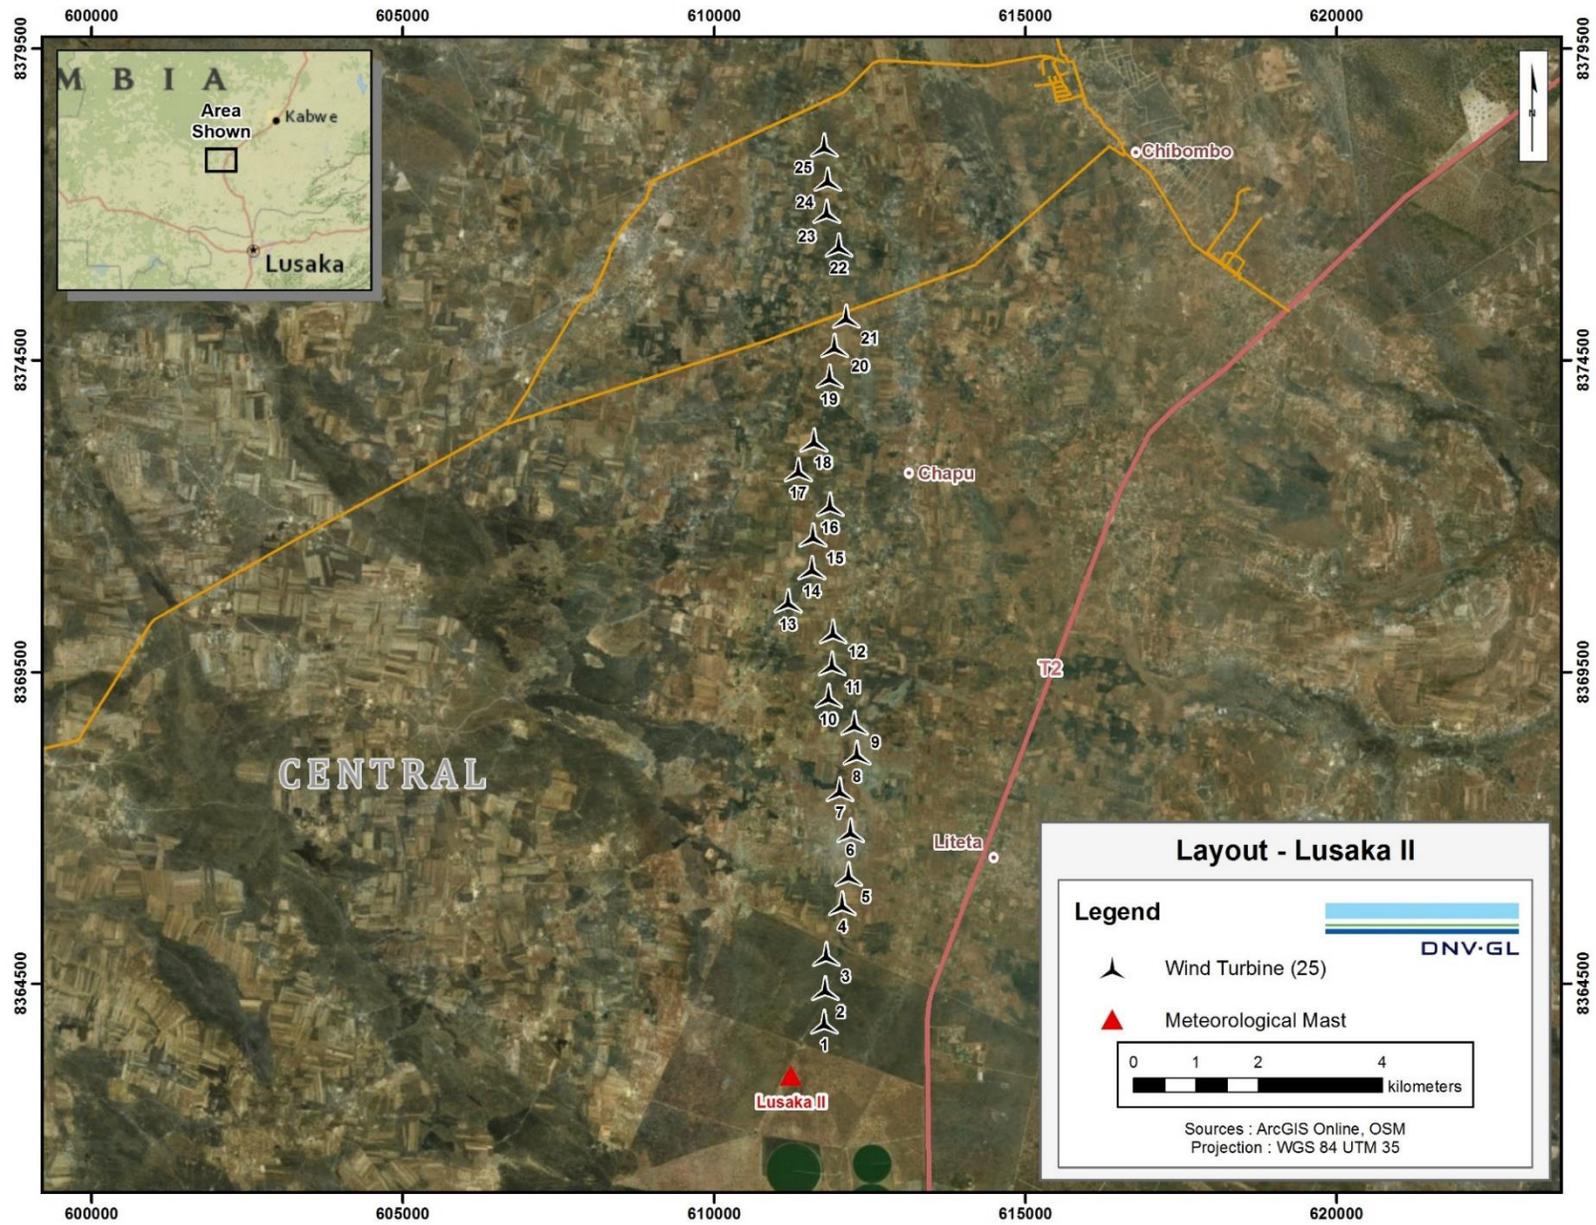


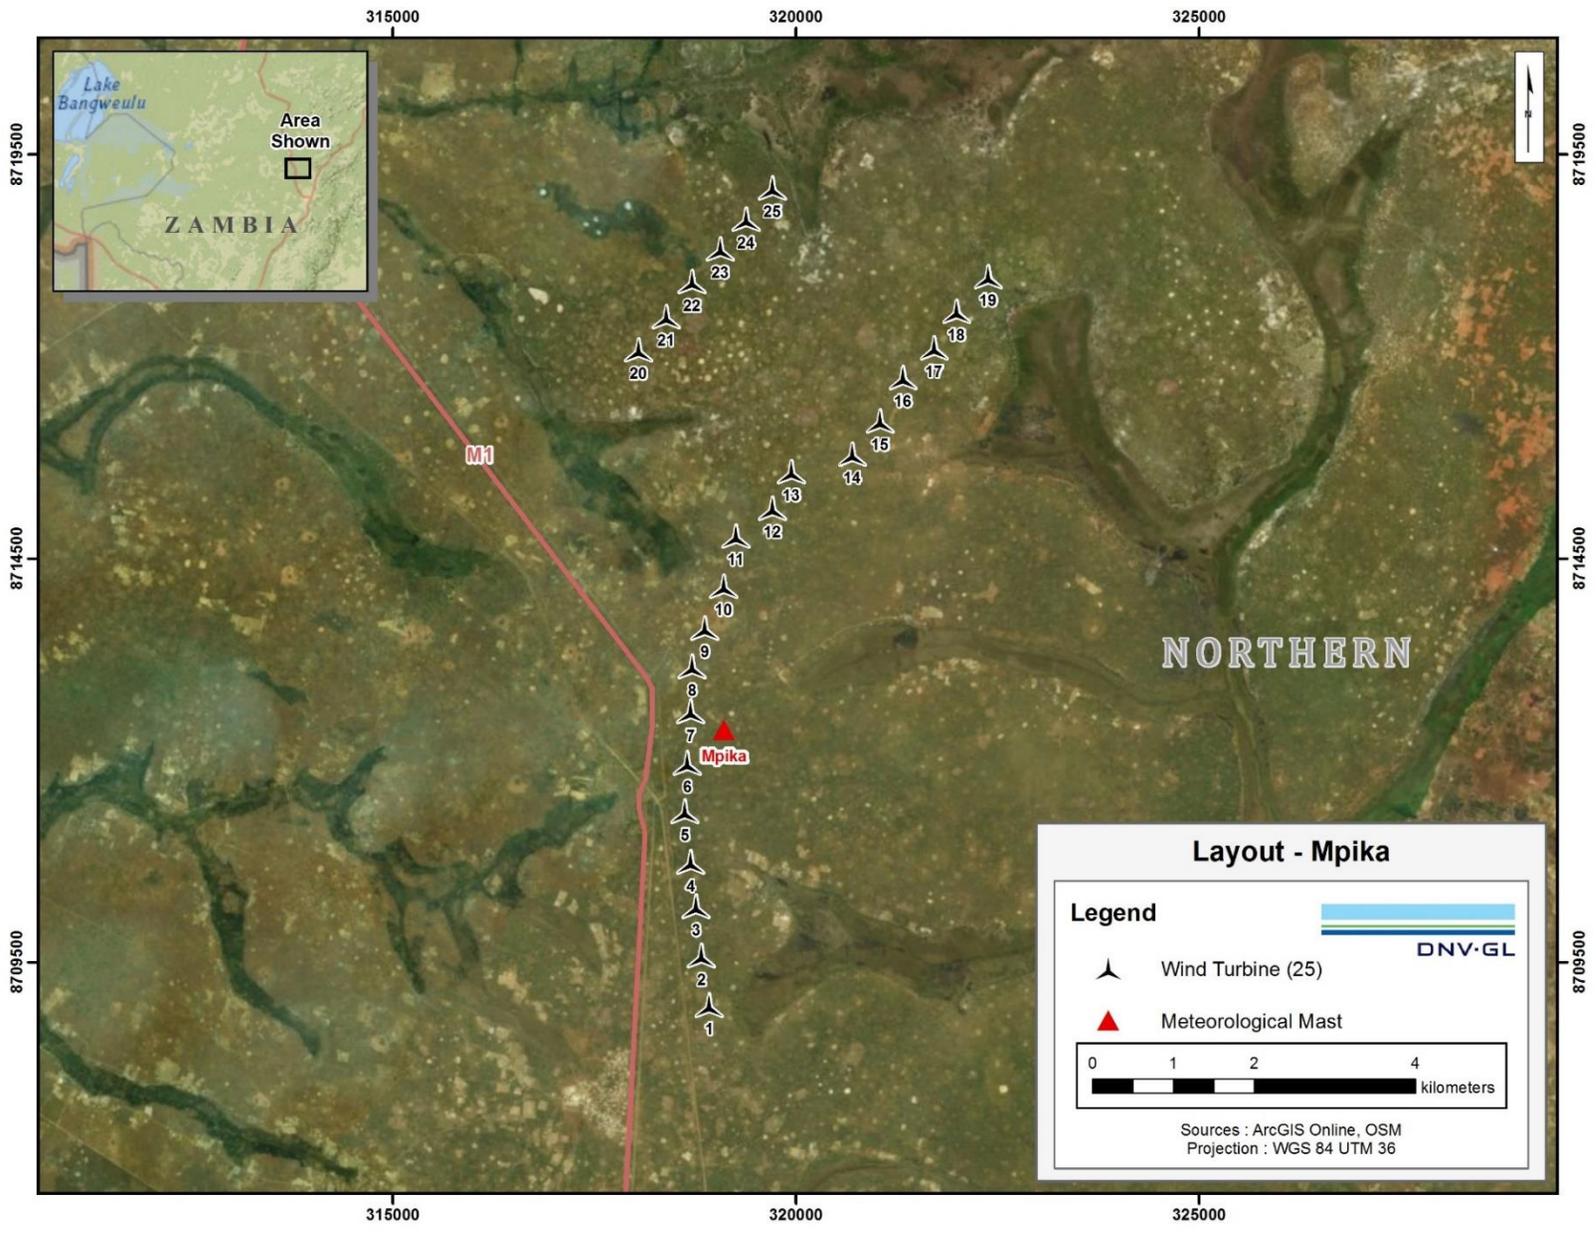

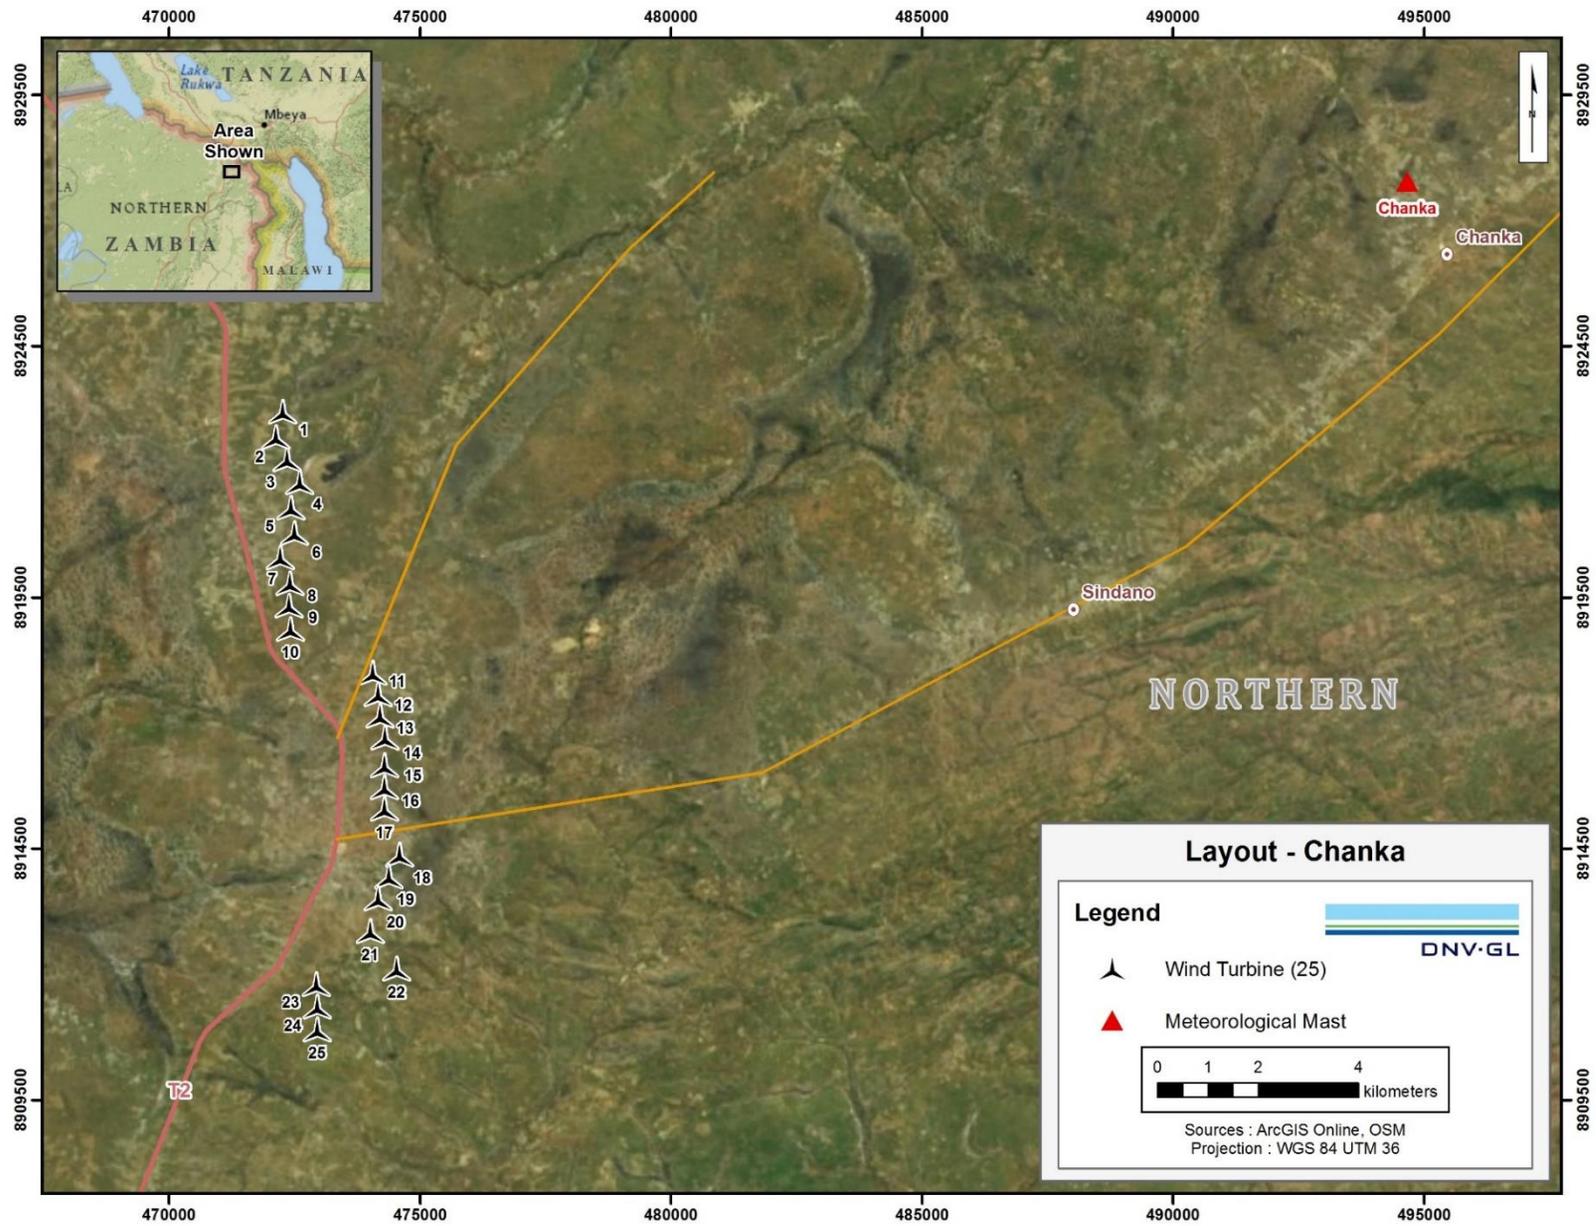

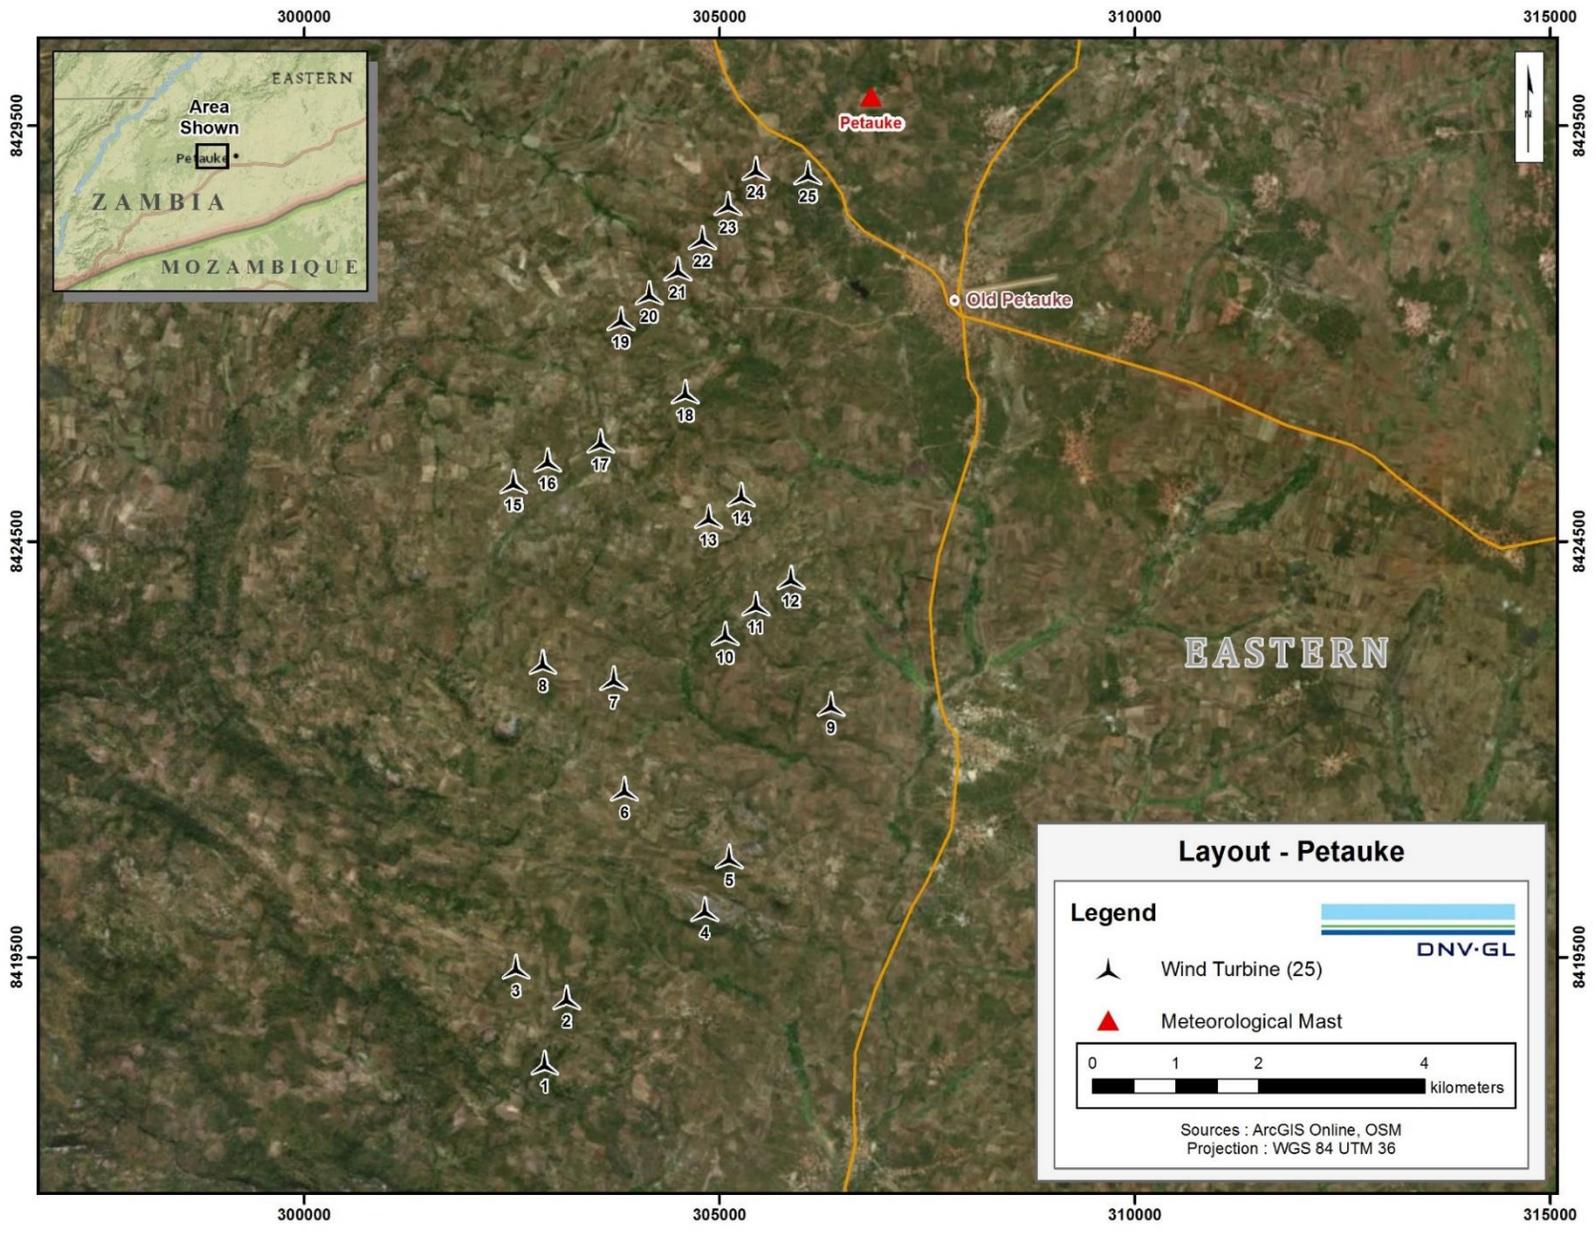

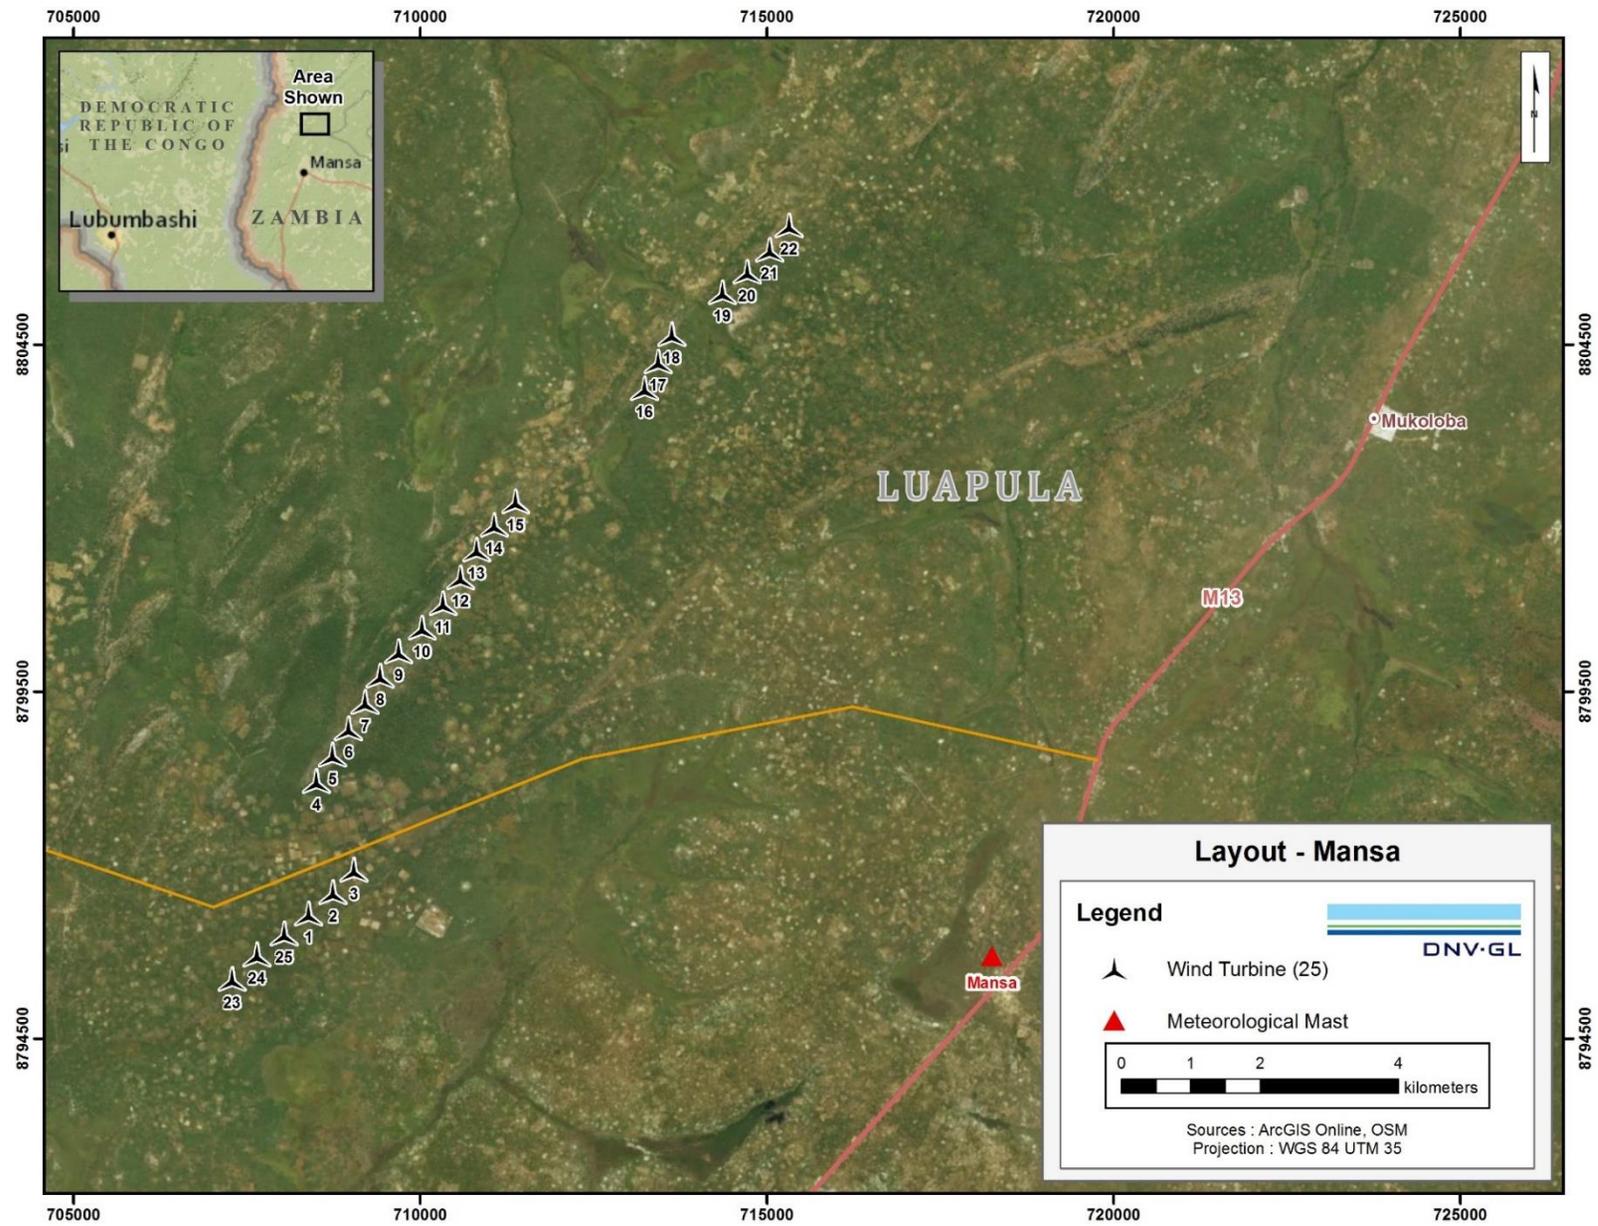

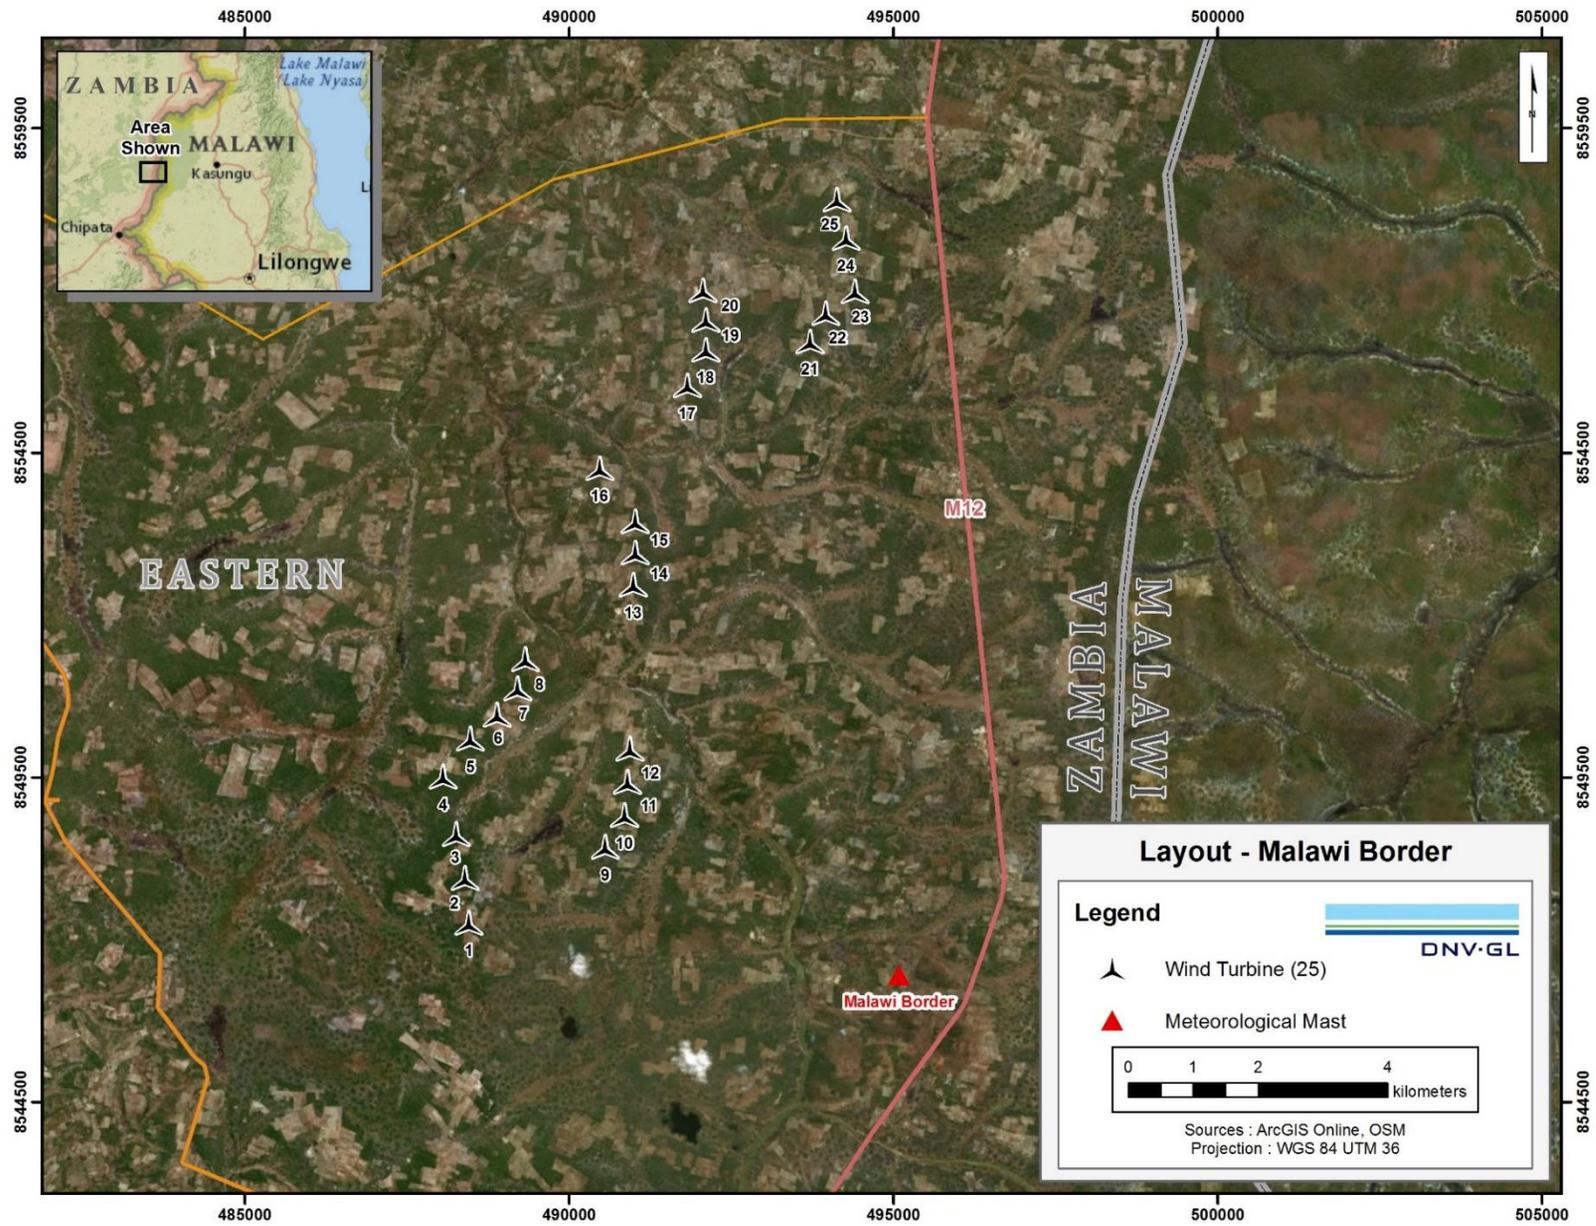

APPENDIX D TURBINE LAYOUT RESULTS

Choma turbine layout with predicted wind speed and energy production

Turbine	Hub height	Easting ¹	Northing ¹	Elevation	Long-term wind speed at hub height ²	Energy output ³	Wake Loss ⁴
		[m]	[m]		[m]	[m/s]	[GWh/annum]
Cho_01	130	483,294	8,134,287	1,348	7.4	12.4	96.8
Cho_02	130	483,290	8,134,764	1,346	7.4	12.7	99.2
Cho_03	130	482,472	8,135,199	1,350	7.4	12.2	95.3
Cho_04	130	481,847	8,135,635	1,355	7.4	12.2	94.4
Cho_05	130	481,410	8,136,148	1,360	7.4	12.3	95.7
Cho_06	130	481,135	8,136,669	1,365	7.5	12.4	95.4
Cho_07	130	481,308	8,137,210	1,365	7.4	12.4	96.4
Cho_08	130	481,416	8,137,738	1,371	7.4	12.8	98.9
Cho_09	130	479,109	8,134,131	1,365	7.4	11.9	94.3
Cho_10	130	479,246	8,134,643	1,370	7.4	12.1	93.4
Cho_11	130	479,352	8,135,139	1,367	7.4	11.8	92.1
Cho_12	130	479,473	8,135,627	1,365	7.4	11.5	91.1
Cho_13	130	479,669	8,136,142	1,363	7.4	11.8	92.8
Cho_14	130	480,310	8,138,661	1,385	7.4	11.8	92.6
Cho_15	130	480,609	8,139,176	1,390	7.4	12.2	96.0
Cho_16	130	480,435	8,139,721	1,389	7.4	12.1	95.9
Cho_17	130	481,878	8,139,687	1,388	7.4	12.4	96.6
Cho_18	130	482,029	8,140,198	1,382	7.3	12.5	99.7
Cho_19	130	474,906	8,137,142	1,368	7.4	11.8	93.2
Cho_20	130	475,548	8,137,568	1,374	7.4	11.9	92.7
Cho_21	130	475,951	8,138,040	1,370	7.4	11.6	92.2
Cho_22	130	476,508	8,138,500	1,368	7.3	11.8	93.5
Cho_23	130	477,371	8,139,308	1,377	7.4	12.3	95.4
Cho_24	130	477,008	8,139,886	1,370	7.4	12.0	94.1
Cho_25	130	476,939	8,140,408	1,365	7.4	12.2	96.6
Average Total				1,369	7.4	12.1 303.0	95.0

- Coordinate system is UTM Zone 35, datum WGS84.
- Wind speed at the location of the turbine, not including wake effects.
- Individual turbine output figures include all wind farm losses.
- Individual turbine wake loss including all wake effects.

Mwinilunga turbine layout with predicted wind speed and energy production

Turbine	Hub height	Easting ¹	Northing ¹	Elevation	Long-term wind speed at hub height ²	Energy output ³	Wake Loss ⁴
		[m]	[m]		[m/s]	[GWh/ann um]	[%]
Mwi_01	130	282,492	8,692,683	1,520	7.5	12.8	94.6
Mwi_02	130	282,892	8,693,051	1,525	7.7	12.9	93.0
Mwi_03	130	282,556	8,692,155	1,525	7.7	13.0	93.8
Mwi_04	130	282,652	8,691,610	1,526	7.6	13.0	94.6
Mwi_05	130	282,748	8,691,040	1,525	7.6	13.0	95.1
Mwi_06	130	282,897	8,690,458	1,524	7.5	12.7	95.4
Mwi_07	130	284,023	8,693,483	1,530	7.5	12.9	96.0
Mwi_08	130	284,298	8,693,918	1,535	7.5	13.1	98.1
Mwi_09	130	284,738	8,691,525	1,523	7.5	13.2	97.5
Mwi_10	130	285,014	8,691,921	1,530	7.5	13.1	97.4
Mwi_11	130	285,350	8,692,305	1,530	7.5	13.1	98.4
Mwi_12	130	279,793	8,692,256	1,515	7.5	12.8	95.6
Mwi_13	130	280,113	8,692,640	1,515	7.5	12.6	94.5
Mwi_14	130	280,470	8,693,003	1,512	7.5	12.8	94.6
Mwi_15	130	283,052	8,689,877	1,525	7.4	12.9	97.4
Mwi_16	130	281,511	8,694,070	1,526	7.5	12.6	94.0
Mwi_17	130	281,737	8,694,566	1,530	7.4	12.6	95.2
Mwi_18	130	275,536	8,693,525	1,545	7.5	13.0	97.7
Mwi_19	130	275,968	8,693,854	1,545	7.5	13.1	97.1
Mwi_20	130	276,360	8,694,230	1,545	7.6	13.3	97.0
Mwi_21	130	276,680	8,694,670	1,545	7.6	13.3	96.9
Mwi_22	130	276,960	8,695,078	1,545	7.5	12.9	96.5
Mwi_23	130	277,176	8,695,574	1,534	7.5	12.8	96.3
Mwi_24	130	283,635	8,693,124	1,528	7.6	12.9	94.8
Mwi_25	130	277,360	8,696,070	1,533	7.5	13.0	97.2
Average Total				1,529	7.5	12.9 323.3	95.9

- e. Coordinate system is UTM Zone 35, datum WGS84.
- f. Wind speed at the location of the turbine, not including wake effects.
- g. Individual turbine output figures include all wind farm losses.
- h. Individual turbine wake loss including all wake effects.

Lusaka turbine layout with predicted wind speed and energy production

Turbine	Hub height	Easting ¹	Northing ¹	Elevation	Long-term wind speed at hub height ²	Energy output ³	Wake Loss ⁴
		[m]	[m]		[m/s]	[GWh/ann um]	[%]
Lus_01	130	611,766	8,363,817	1,183	8.0	15.1	98.9
Lus_02	130	611,782	8,364,359	1,180	8.1	15.2	98.7
Lus_03	130	611,796	8,364,904	1,180	8.1	15.5	99.0
Lus_04	130	612,055	8,365,719	1,180	8.2	15.5	98.7
Lus_05	130	612,154	8,366,186	1,180	8.1	15.4	98.8
Lus_06	130	612,189	8,366,888	1,179	8.1	15.4	98.7
Lus_07	130	612,019	8,367,551	1,177	8.1	15.4	98.6
Lus_08	130	612,293	8,368,131	1,177	8.2	15.4	98.2
Lus_09	130	612,252	8,368,612	1,176	8.2	15.5	98.2
Lus_10	130	611,840	8,369,047	1,174	8.2	15.2	96.7
Lus_11	130	611,895	8,369,562	1,173	8.2	15.4	98.2
Lus_12	130	611,909	8,370,082	1,170	8.2	15.5	98.6
Lus_13	130	611,187	8,370,572	1,164	8.2	15.1	96.4
Lus_14	130	611,574	8,371,105	1,165	8.2	15.5	98.5
Lus_15	130	611,590	8,371,630	1,165	8.2	15.4	98.4
Lus_16	130	611,858	8,372,123	1,165	8.2	15.5	98.4
Lus_17	130	611,351	8,372,678	1,162	8.2	15.5	97.8
Lus_18	130	611,599	8,373,159	1,163	8.2	15.5	98.9
Lus_19	130	611,855	8,374,183	1,163	8.2	15.5	98.8
Lus_20	130	611,933	8,374,672	1,162	8.2	15.5	98.6
Lus_21	130	612,121	8,375,140	1,163	8.2	15.6	99.0
Lus_22	130	612,004	8,376,287	1,161	8.2	15.5	98.6
Lus_23	130	611,802	8,376,825	1,160	8.2	15.6	98.5
Lus_24	130	611,822	8,377,341	1,160	8.2	15.6	98.6
Lus_25	130	611,763	8,377,887	1,157	8.2	15.6	99.3
Average Total				1,169	8.2	15.4 386.0	98.4

- i. Coordinate system is UTM Zone 35, datum WGS84.
- j. Wind speed at the location of the turbine, not including wake effects.
- k. Individual turbine output figures include all wind farm losses.
- l. Individual turbine wake loss including all wake effects.

Mpika turbine layout with predicted wind speed and energy production

Turbine	Hub height	Easting ¹	Northing ¹	Elevation	Long-term wind speed at hub height ²	Energy output ³	Wake Loss ⁴
		[m]	[m]		[m]	[m/s]	[GWh/ann um]
Mpi_01	130	318,920	8,708,915	1,414	7.2	12.7	98.9
Mpi_02	130	318,825	8,709,528	1,415	7.3	13.1	98.0
Mpi_03	130	318,758	8,710,141	1,415	7.3	13.1	98.2
Mpi_04	130	318,691	8,710,687	1,415	7.4	13.2	98.0
Mpi_05	130	318,623	8,711,319	1,415	7.3	13.1	98.3
Mpi_06	130	318,652	8,711,913	1,415	7.3	13.0	98.7
Mpi_07	130	318,693	8,712,552	1,415	7.3	12.9	98.6
Mpi_08	130	318,714	8,713,112	1,415	7.2	12.8	98.6
Mpi_09	130	318,865	8,713,587	1,411	7.3	13.0	98.8
Mpi_10	130	319,102	8,714,104	1,409	7.3	13.2	98.7
Mpi_11	130	319,253	8,714,729	1,410	7.4	13.3	98.7
Mpi_12	130	319,706	8,715,073	1,410	7.3	13.1	98.5
Mpi_13	130	319,943	8,715,526	1,410	7.3	12.9	97.9
Mpi_14	130	320,697	8,715,741	1,405	7.3	12.9	98.6
Mpi_15	130	321,042	8,716,151	1,402	7.2	12.8	98.7
Mpi_16	130	321,322	8,716,690	1,400	7.4	13.3	98.8
Mpi_17	130	321,710	8,717,056	1,399	7.4	13.5	98.8
Mpi_18	130	321,990	8,717,508	1,397	7.3	13.2	98.9
Mpi_19	130	322,378	8,717,939	1,395	7.3	13.0	99.2
Mpi_20	130	318,046	8,717,034	1,398	7.2	11.8	92.4
Mpi_21	130	318,391	8,717,444	1,401	7.2	12.1	93.3
Mpi_22	130	318,714	8,717,875	1,399	7.2	12.0	93.3
Mpi_23	130	319,059	8,718,284	1,395	7.2	12.2	93.5
Mpi_24	130	319,382	8,718,650	1,389	7.2	12.1	93.7
Mpi_25	130	319,706	8,719,038	1,383	7.2	12.0	94.1
Average Total				1,405	7.3	12.8 320.3	97.3

- m. Coordinate system is UTM Zone 36, datum WGS84.
- n. Wind speed at the location of the turbine, not including wake effects.
- o. Individual turbine output figures include all wind farm losses.
- p. Individual turbine wake loss including all wake effects.

Chanka turbine layout with predicted wind speed and energy production

Turbine	Hub height	Easting ¹	Northing ¹	Elevation	Long-term wind speed at hub height ²	Energy output ³	Wake Loss ⁴
		[m]	[m]		[m/s]	[GWh/ann um]	[%]
Cha_01	130	472,264	8,923,114	1,320	7.4	13.5	99.0
Cha_02	130	472,132	8,922,609	1,320	7.4	13.6	98.2
Cha_03	130	472,349	8,922,165	1,320	7.4	13.5	97.6
Cha_04	130	472,605	8,921,703	1,318	7.4	13.6	98.6
Cha_05	130	472,427	8,921,205	1,324	7.4	13.6	98.4
Cha_06	130	472,493	8,920,699	1,327	7.5	13.9	98.6
Cha_07	130	472,214	8,920,211	1,326	7.5	14.0	98.2
Cha_08	130	472,408	8,919,699	1,332	7.5	13.9	98.1
Cha_09	130	472,393	8,919,253	1,332	7.5	13.9	97.5
Cha_10	130	472,422	8,918,790	1,327	7.5	13.8	97.0
Cha_11	130	474,056	8,917,915	1,332	7.6	14.0	98.4
Cha_12	130	474,166	8,917,485	1,330	7.6	14.0	98.2
Cha_13	130	474,207	8,917,058	1,327	7.6	14.0	98.1
Cha_14	130	474,302	8,916,626	1,322	7.5	14.0	98.5
Cha_15	130	474,286	8,916,069	1,313	7.5	13.9	98.6
Cha_16	130	474,290	8,915,638	1,312	7.5	14.0	98.5
Cha_17	130	474,293	8,915,204	1,315	7.5	14.0	98.5
Cha_18	130	474,592	8,914,296	1,311	7.4	13.7	99.0
Cha_19	130	474,375	8,913,861	1,310	7.4	13.8	98.8
Cha_20	130	474,166	8,913,424	1,312	7.5	13.8	98.7
Cha_21	130	474,007	8,912,771	1,315	7.5	14.0	98.6
Cha_22	130	474,530	8,912,025	1,302	7.5	14.1	98.8
Cha_23	130	472,928	8,911,715	1,316	7.5	13.6	96.1
Cha_24	130	472,955	8,911,272	1,288	7.5	14.0	98.4
Cha_25	130	472,955	8,910,818	1,273	7.4	13.6	98.8
Average Total				1,317	7.5	13.8 345.6	98.3

- q. Coordinate system is UTM Zone 36, datum WGS84.
- r. Wind speed at the location of the turbine, not including wake effects.
- s. Individual turbine output figures include all wind farm losses.
- t. Individual turbine wake loss including all wake effects.

Petauke turbine layout with predicted wind speed and energy production

Turbine	Hub height	Easting ¹	Northing ¹	Elevation	Long-term wind speed at hub height ²	Energy output ³	Wake Loss ⁴
		[m]	[m]		[m]	[m/s]	[GWh/ann um]
Pet_01	130	302,892	8,418,177	982	6.9	12.1	99.5
Pet_02	130	303,159	8,418,963	993	6.9	11.8	98.1
Pet_03	130	302,547	8,419,330	1,005	6.9	11.4	93.5
Pet_04	130	304,823	8,420,025	1,040	7.3	13.3	99.4
Pet_05	130	305,117	8,420,656	1,059	7.5	13.9	99.1
Pet_06	130	303,859	8,421,473	1,025	6.8	11.1	96.1
Pet_07	130	303,726	8,422,801	1,025	6.8	11.0	93.9
Pet_08	130	302,873	8,422,997	1,030	6.8	10.9	94.0
Pet_09	130	306,342	8,422,491	995	6.9	12.1	99.7
Pet_10	130	305,068	8,423,340	1,035	7.0	11.9	96.9
Pet_11	130	305,438	8,423,700	1,041	7.0	11.7	94.7
Pet_12	130	305,863	8,424,016	1,065	7.3	13.1	96.9
Pet_13	130	304,872	8,424,751	1,067	7.0	11.3	90.7
Pet_14	130	305,264	8,425,012	1,070	7.1	11.7	91.4
Pet_15	130	302,522	8,425,170	1,057	6.9	11.4	94.0
Pet_16	130	302,931	8,425,431	1,060	6.9	11.4	93.9
Pet_17	130	303,568	8,425,660	1,063	6.8	11.0	93.2
Pet_18	130	304,590	8,426,250	1,052	6.8	10.9	92.8
Pet_19	130	303,813	8,427,130	1,090	7.2	11.7	90.5
Pet_20	130	304,156	8,427,440	1,050	6.9	11.1	92.9
Pet_21	130	304,499	8,427,726	1,045	6.8	11.1	94.7
Pet_22	130	304,793	8,428,102	1,048	6.8	11.1	95.2
Pet_23	130	305,103	8,428,510	1,044	6.8	11.0	95.8
Pet_24	130	305,438	8,428,935	1,057	6.8	11.3	96.2
Pet_25	130	306,067	8,428,882	1,080	7.0	12.1	98.3
Average Total				1,043	7.0	11.7 291.5	95.2

- u. Coordinate system is UTM Zone 36, datum WGS84.
- v. Wind speed at the location of the turbine, not including wake effects.
- w. Individual turbine output figures include all wind farm losses.
- x. Individual turbine wake loss including all wake effects.

Mansa turbine layout with predicted wind speed and energy production

Turbine	Hub height	Easting ¹	Northing ¹	Elevation	Long-term wind speed at hub height ²	Energy output ³	Wake Loss ⁴
		[m]	[m]		[m/s]	[GWh/ann um]	[%]
Man_01	130	708,393	8,796,244	1,374	7.3	12.7	97.7
Man_02	130	708,740	8,796,547	1,385	7.4	12.9	97.5
Man_03	130	709,041	8,796,870	1,381	7.4	12.8	98.0
Man_04	130	708,499	8,798,153	1,380	7.3	12.5	97.4
Man_05	130	708,731	8,798,527	1,386	7.3	12.7	97.8
Man_06	130	708,967	8,798,908	1,390	7.3	12.8	98.0
Man_07	130	709,206	8,799,290	1,390	7.3	12.7	98.0
Man_08	130	709,423	8,799,668	1,390	7.3	12.7	98.0
Man_09	130	709,688	8,800,021	1,389	7.4	13.0	98.0
Man_10	130	710,026	8,800,360	1,375	7.5	13.1	98.1
Man_11	130	710,329	8,800,711	1,360	7.4	12.9	98.1
Man_12	130	710,583	8,801,086	1,350	7.3	12.6	98.2
Man_13	130	710,812	8,801,485	1,335	7.2	12.4	98.1
Man_14	130	711,063	8,801,848	1,327	7.2	12.2	98.0
Man_15	130	711,377	8,802,184	1,316	7.1	12.2	98.5
Man_16	130	713,233	8,803,811	1,305	7.2	12.4	98.5
Man_17	130	713,432	8,804,196	1,300	7.2	12.4	98.0
Man_18	130	713,630	8,804,589	1,304	7.2	12.6	98.5
Man_19	130	714,359	8,805,195	1,303	7.2	12.4	98.2
Man_20	130	714,718	8,805,486	1,320	7.3	12.7	97.9
Man_21	130	715,040	8,805,804	1,320	7.3	12.6	97.9
Man_22	130	715,320	8,806,159	1,310	7.1	12.3	98.7
Man_23	130	707,288	8,795,300	1,343	7.1	12.2	98.5
Man_24	130	707,643	8,795,651	1,351	7.2	12.3	97.9
Man_25	130	708,036	8,795,954	1,361	7.3	12.6	97.8
Average Total				1,350	7.3	12.6 314.7	98.0

- y. Coordinate system is UTM Zone 35, datum WGS84.
- z. Wind speed at the location of the turbine, not including wake effects.
- aa. Individual turbine output figures include all wind farm losses.
- bb. Individual turbine wake loss including all wake effects.

Malawi turbine layout with predicted wind speed and energy production

Turbine	Hub height	Easting ¹	Northing ¹	Elevation	Long-term wind speed at hub height ²	Energy output ³	Wake Loss ⁴
		[m]	[m]		[m]	[m/s]	[GWh/ann um]
Mal_01	130	488,449	8,547,193	1,075	7.1	12.3	99.0
Mal_02	130	488,391	8,547,880	1,074	7.1	12.2	97.3
Mal_03	130	488,251	8,548,555	1,068	7.2	12.3	95.5
Mal_04	130	488,047	8,549,442	1,065	7.1	11.9	95.4
Mal_05	130	488,469	8,550,030	1,060	7.1	11.9	94.2
Mal_06	130	488,880	8,550,401	1,054	7.1	11.9	95.4
Mal_07	130	489,195	8,550,805	1,050	7.1	12.1	96.0
Mal_08	130	489,316	8,551,257	1,050	7.1	12.2	96.2
Mal_09	130	490,547	8,548,361	1,054	7.0	12.3	99.5
Mal_10	130	490,853	8,548,851	1,055	7.1	12.4	99.5
Mal_11	130	490,898	8,549,364	1,051	7.1	12.4	99.1
Mal_12	130	490,936	8,549,874	1,046	7.1	12.4	99.3
Mal_13	130	490,983	8,552,399	1,060	7.2	12.7	99.6
Mal_14	130	491,019	8,552,895	1,054	7.1	12.5	99.1
Mal_15	130	491,019	8,553,379	1,045	7.1	12.3	99.0
Mal_16	130	490,466	8,554,199	1,039	7.0	11.7	94.8
Mal_17	130	491,821	8,555,470	1,057	7.1	12.3	98.5
Mal_18	130	492,106	8,556,024	1,055	7.2	12.3	96.5
Mal_19	130	492,106	8,556,479	1,061	7.0	11.5	93.9
Mal_20	130	492,060	8,556,939	1,065	7.0	11.5	93.8
Mal_21	130	493,713	8,556,152	1,070	7.1	12.3	99.2
Mal_22	130	493,949	8,556,582	1,070	7.0	11.9	96.6
Mal_23	130	494,403	8,556,924	1,075	7.0	12.2	99.7
Mal_24	130	494,269	8,557,743	1,080	7.0	12.2	98.9
Mal_25	130	494,127	8,558,335	1,078	7.0	11.9	97.3
Average Total				1,060	7.1	12.1 303.7	97.3

cc. Coordinate system is UTM Zone 36, datum WGS84.

dd. Wind speed at the location of the turbine, not including wake effects.

ee. Individual turbine output figures include all wind farm losses.

ff. Individual turbine wake loss including all wake effects.

APPENDIX E MONTHLY AND DIURNAL PRODUCTION PROFILES

Choma monthly and diurnal production matrix

Hour	Energy Production ^a [%]											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0000	0.25	0.21	0.28	0.47	0.47	0.54	0.40	0.40	0.63	0.53	0.45	0.31
0100	0.25	0.21	0.31	0.46	0.45	0.54	0.38	0.42	0.64	0.59	0.48	0.35
0200	0.26	0.22	0.29	0.51	0.45	0.51	0.38	0.44	0.70	0.61	0.45	0.34
0300	0.27	0.21	0.30	0.52	0.49	0.49	0.43	0.48	0.71	0.67	0.47	0.36
0400	0.26	0.22	0.32	0.53	0.50	0.46	0.50	0.52	0.70	0.66	0.50	0.36
0500	0.26	0.23	0.35	0.54	0.52	0.51	0.52	0.53	0.72	0.67	0.49	0.35
0600	0.25	0.24	0.34	0.58	0.57	0.54	0.58	0.59	0.76	0.71	0.45	0.29
0700	0.23	0.18	0.30	0.49	0.54	0.53	0.57	0.61	0.61	0.57	0.40	0.22
0800	0.22	0.18	0.33	0.43	0.37	0.35	0.39	0.44	0.46	0.51	0.41	0.22
0900	0.25	0.20	0.35	0.42	0.36	0.37	0.34	0.37	0.45	0.50	0.36	0.21
1000	0.24	0.18	0.33	0.35	0.30	0.40	0.34	0.32	0.43	0.44	0.27	0.19
1100	0.22	0.14	0.29	0.26	0.23	0.33	0.31	0.26	0.38	0.34	0.20	0.20
1200	0.19	0.12	0.23	0.21	0.18	0.28	0.26	0.22	0.34	0.27	0.18	0.18
1300	0.17	0.13	0.21	0.17	0.15	0.24	0.22	0.18	0.31	0.20	0.18	0.16
1400	0.18	0.12	0.18	0.17	0.14	0.23	0.21	0.16	0.33	0.18	0.21	0.15
1500	0.19	0.10	0.19	0.20	0.17	0.23	0.22	0.16	0.33	0.18	0.22	0.16
1600	0.15	0.10	0.20	0.23	0.19	0.26	0.24	0.18	0.41	0.17	0.23	0.17
1700	0.10	0.10	0.22	0.25	0.27	0.29	0.28	0.24	0.47	0.25	0.22	0.14
1800	0.10	0.10	0.22	0.35	0.51	0.46	0.49	0.35	0.46	0.30	0.24	0.14
1900	0.13	0.13	0.29	0.48	0.58	0.52	0.55	0.49	0.56	0.43	0.28	0.19
2000	0.14	0.17	0.27	0.46	0.53	0.46	0.43	0.45	0.52	0.47	0.30	0.26
2100	0.20	0.20	0.24	0.52	0.51	0.47	0.39	0.39	0.49	0.44	0.33	0.26
2200	0.24	0.19	0.24	0.50	0.50	0.51	0.42	0.35	0.56	0.45	0.39	0.26
2300	0.26	0.19	0.27	0.51	0.50	0.52	0.43	0.31	0.61	0.48	0.42	0.28
All	4.96	4.08	6.57	9.62	9.48	10.03	9.29	8.86	12.59	10.64	8.11	5.76

a. Only wake and hysteresis losses have been included in the calculation

Mwinilunga monthly and diurnal production matrix

Hour	Energy Production ^a [%]											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0000	0.22	0.14	0.29	0.44	0.68	0.72	0.76	0.69	0.61	0.36	0.24	0.16
0100	0.22	0.15	0.29	0.44	0.69	0.72	0.78	0.71	0.64	0.39	0.26	0.17
0200	0.25	0.17	0.28	0.48	0.71	0.74	0.78	0.74	0.63	0.40	0.28	0.16
0300	0.24	0.20	0.30	0.50	0.69	0.75	0.79	0.74	0.63	0.42	0.30	0.14
0400	0.24	0.21	0.28	0.51	0.69	0.76	0.80	0.75	0.61	0.39	0.30	0.14
0500	0.26	0.23	0.31	0.52	0.70	0.78	0.79	0.74	0.64	0.43	0.30	0.15
0600	0.24	0.19	0.29	0.50	0.68	0.79	0.80	0.74	0.67	0.40	0.31	0.17
0700	0.23	0.19	0.27	0.45	0.66	0.76	0.80	0.72	0.64	0.35	0.25	0.14
0800	0.17	0.15	0.24	0.44	0.49	0.52	0.63	0.61	0.49	0.27	0.19	0.08
0900	0.17	0.16	0.24	0.47	0.50	0.49	0.59	0.58	0.50	0.27	0.19	0.08
1000	0.17	0.17	0.22	0.40	0.43	0.46	0.51	0.47	0.41	0.25	0.16	0.09
1100	0.17	0.17	0.20	0.30	0.33	0.31	0.33	0.33	0.27	0.21	0.18	0.10
1200	0.19	0.18	0.15	0.20	0.26	0.22	0.19	0.23	0.17	0.19	0.17	0.12
1300	0.22	0.16	0.12	0.17	0.21	0.17	0.13	0.17	0.13	0.16	0.13	0.13
1400	0.24	0.20	0.14	0.15	0.19	0.14	0.11	0.15	0.15	0.13	0.11	0.16
1500	0.22	0.16	0.17	0.16	0.19	0.13	0.11	0.15	0.15	0.13	0.14	0.16
1600	0.19	0.12	0.16	0.20	0.21	0.16	0.16	0.19	0.17	0.13	0.11	0.11
1700	0.13	0.12	0.19	0.20	0.23	0.22	0.22	0.25	0.20	0.16	0.12	0.14
1800	0.14	0.11	0.19	0.24	0.36	0.46	0.46	0.41	0.31	0.22	0.11	0.10
1900	0.15	0.09	0.25	0.34	0.53	0.64	0.65	0.63	0.50	0.26	0.17	0.13
2000	0.16	0.13	0.28	0.43	0.64	0.71	0.74	0.66	0.58	0.29	0.18	0.12
2100	0.21	0.12	0.29	0.43	0.68	0.73	0.74	0.68	0.58	0.34	0.20	0.11
2200	0.22	0.15	0.30	0.46	0.64	0.73	0.75	0.68	0.58	0.33	0.25	0.13
2300	0.23	0.14	0.30	0.44	0.65	0.71	0.76	0.68	0.59	0.38	0.21	0.13
All	4.90	3.84	5.74	8.89	12.04	12.80	13.37	12.71	10.87	6.87	4.87	3.12

b. Only wake and hysteresis losses have been included in the calculation

Lusaka monthly and diurnal production matrix

Hour	Energy Production ^a [%]											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0000	0.19	0.15	0.30	0.44	0.58	0.60	0.50	0.56	0.62	0.49	0.25	0.24
0100	0.19	0.17	0.29	0.46	0.57	0.59	0.50	0.54	0.62	0.52	0.27	0.22
0200	0.18	0.17	0.29	0.47	0.54	0.59	0.51	0.56	0.63	0.54	0.26	0.23
0300	0.17	0.14	0.29	0.48	0.53	0.59	0.50	0.57	0.63	0.54	0.28	0.22
0400	0.19	0.12	0.30	0.51	0.56	0.59	0.51	0.56	0.63	0.55	0.27	0.22
0500	0.21	0.18	0.30	0.52	0.55	0.59	0.52	0.57	0.64	0.55	0.26	0.22
0600	0.22	0.16	0.31	0.48	0.56	0.59	0.54	0.58	0.63	0.54	0.27	0.19
0700	0.20	0.13	0.27	0.42	0.51	0.60	0.54	0.56	0.59	0.46	0.25	0.14
0800	0.19	0.12	0.33	0.45	0.42	0.41	0.39	0.44	0.53	0.48	0.29	0.15
0900	0.20	0.14	0.39	0.55	0.48	0.51	0.47	0.52	0.58	0.48	0.29	0.16
1000	0.18	0.14	0.37	0.53	0.43	0.51	0.48	0.48	0.54	0.43	0.25	0.13
1100	0.17	0.12	0.34	0.45	0.35	0.43	0.39	0.42	0.47	0.33	0.19	0.11
1200	0.16	0.10	0.30	0.36	0.30	0.35	0.31	0.37	0.40	0.24	0.16	0.12
1300	0.12	0.10	0.25	0.27	0.25	0.29	0.25	0.30	0.36	0.22	0.13	0.12
1400	0.12	0.09	0.22	0.25	0.22	0.23	0.21	0.28	0.33	0.20	0.14	0.12
1500	0.13	0.08	0.20	0.20	0.20	0.21	0.20	0.25	0.31	0.21	0.14	0.10
1600	0.13	0.07	0.17	0.20	0.21	0.20	0.22	0.26	0.32	0.19	0.14	0.12
1700	0.08	0.07	0.19	0.22	0.23	0.25	0.26	0.28	0.34	0.21	0.18	0.12
1800	0.08	0.06	0.23	0.35	0.42	0.49	0.46	0.33	0.41	0.26	0.17	0.14
1900	0.11	0.14	0.34	0.46	0.53	0.60	0.57	0.50	0.51	0.36	0.22	0.20
2000	0.13	0.18	0.37	0.51	0.56	0.61	0.58	0.57	0.58	0.44	0.23	0.21
2100	0.15	0.16	0.37	0.51	0.57	0.62	0.58	0.60	0.60	0.46	0.23	0.22
2200	0.18	0.15	0.36	0.47	0.58	0.62	0.56	0.61	0.61	0.45	0.24	0.24
2300	0.18	0.18	0.36	0.45	0.58	0.61	0.54	0.57	0.62	0.48	0.25	0.23
All	3.84	3.14	7.12	10.01	10.71	11.69	10.56	11.27	12.47	9.62	5.38	4.18

c. Only wake and hysteresis losses have been included in the calculation

Mpika monthly and diurnal production matrix

Hour	Energy Production ^a [%]											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0000	0.14	0.15	0.35	0.52	0.60	0.69	0.64	0.66	0.56	0.50	0.29	0.17
0100	0.13	0.10	0.33	0.55	0.57	0.71	0.65	0.63	0.59	0.51	0.29	0.15
0200	0.15	0.09	0.34	0.54	0.55	0.67	0.64	0.66	0.61	0.44	0.26	0.13
0300	0.13	0.11	0.34	0.53	0.54	0.64	0.63	0.66	0.61	0.45	0.27	0.12
0400	0.12	0.12	0.34	0.53	0.56	0.62	0.63	0.66	0.61	0.43	0.28	0.13
0500	0.12	0.11	0.34	0.47	0.55	0.60	0.62	0.65	0.61	0.41	0.26	0.12
0600	0.11	0.11	0.32	0.45	0.55	0.57	0.61	0.66	0.59	0.38	0.26	0.11
0700	0.07	0.08	0.26	0.46	0.43	0.45	0.52	0.57	0.54	0.30	0.25	0.08
0800	0.08	0.07	0.27	0.47	0.47	0.41	0.46	0.56	0.63	0.37	0.29	0.10
0900	0.08	0.06	0.26	0.43	0.52	0.47	0.53	0.57	0.64	0.37	0.25	0.11
1000	0.11	0.06	0.25	0.35	0.46	0.41	0.45	0.47	0.55	0.32	0.22	0.11
1100	0.10	0.09	0.18	0.28	0.38	0.30	0.35	0.36	0.45	0.29	0.17	0.10
1200	0.12	0.09	0.16	0.27	0.32	0.24	0.29	0.31	0.38	0.28	0.15	0.11
1300	0.13	0.09	0.16	0.27	0.29	0.22	0.26	0.30	0.35	0.29	0.18	0.13
1400	0.14	0.11	0.18	0.26	0.29	0.22	0.26	0.30	0.37	0.33	0.17	0.13
1500	0.10	0.12	0.22	0.28	0.31	0.26	0.27	0.30	0.41	0.35	0.16	0.14
1600	0.11	0.14	0.25	0.31	0.32	0.34	0.33	0.36	0.48	0.36	0.24	0.14
1700	0.16	0.11	0.24	0.34	0.35	0.40	0.38	0.40	0.50	0.39	0.27	0.17
1800	0.15	0.12	0.27	0.40	0.39	0.46	0.45	0.49	0.46	0.45	0.31	0.21
1900	0.15	0.16	0.30	0.41	0.36	0.41	0.46	0.45	0.48	0.47	0.26	0.20
2000	0.17	0.16	0.31	0.41	0.36	0.35	0.48	0.44	0.57	0.49	0.28	0.18
2100	0.18	0.15	0.30	0.48	0.41	0.34	0.51	0.47	0.69	0.58	0.34	0.17
2200	0.15	0.15	0.33	0.54	0.47	0.45	0.56	0.56	0.66	0.59	0.36	0.17
2300	0.14	0.14	0.33	0.57	0.56	0.60	0.59	0.66	0.61	0.52	0.31	0.18
All	3.02	2.69	6.63	10.12	10.62	10.84	11.60	12.16	12.95	9.86	6.12	3.40

d. Only wake and hysteresis losses have been included in the calculation

Chanka monthly and diurnal production matrix

Hour	Energy Production ^a [%]											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0000	0.12	0.15	0.12	0.35	0.43	0.49	0.44	0.49	0.57	0.47	0.26	0.20
0100	0.11	0.13	0.13	0.34	0.48	0.48	0.45	0.54	0.60	0.44	0.25	0.16
0200	0.11	0.12	0.12	0.35	0.54	0.53	0.51	0.60	0.63	0.43	0.26	0.15
0300	0.13	0.10	0.11	0.36	0.54	0.57	0.57	0.62	0.67	0.43	0.25	0.16
0400	0.14	0.11	0.12	0.35	0.55	0.57	0.60	0.60	0.66	0.41	0.24	0.14
0500	0.13	0.13	0.12	0.35	0.55	0.54	0.60	0.59	0.66	0.36	0.21	0.15
0600	0.10	0.08	0.11	0.33	0.50	0.52	0.58	0.56	0.61	0.31	0.15	0.14
0700	0.07	0.05	0.09	0.30	0.44	0.42	0.51	0.51	0.58	0.32	0.16	0.12
0800	0.08	0.06	0.11	0.35	0.51	0.43	0.49	0.58	0.67	0.33	0.18	0.13
0900	0.09	0.05	0.11	0.37	0.53	0.48	0.51	0.65	0.70	0.36	0.22	0.13
1000	0.11	0.05	0.13	0.38	0.53	0.55	0.52	0.64	0.69	0.40	0.25	0.12
1100	0.11	0.05	0.12	0.37	0.52	0.53	0.49	0.58	0.61	0.42	0.25	0.11
1200	0.16	0.06	0.13	0.40	0.51	0.44	0.43	0.50	0.53	0.38	0.25	0.10
1300	0.13	0.07	0.12	0.38	0.48	0.37	0.38	0.43	0.45	0.35	0.27	0.16
1400	0.16	0.12	0.12	0.38	0.47	0.35	0.35	0.42	0.44	0.34	0.31	0.17
1500	0.13	0.10	0.15	0.39	0.47	0.35	0.36	0.43	0.48	0.42	0.32	0.22
1600	0.14	0.10	0.19	0.41	0.47	0.39	0.42	0.51	0.59	0.54	0.37	0.24
1700	0.09	0.08	0.15	0.40	0.47	0.41	0.47	0.53	0.64	0.63	0.43	0.17
1800	0.11	0.11	0.17	0.40	0.49	0.48	0.45	0.49	0.58	0.58	0.42	0.15
1900	0.10	0.18	0.15	0.41	0.43	0.49	0.42	0.48	0.55	0.53	0.37	0.15
2000	0.09	0.17	0.16	0.41	0.41	0.48	0.46	0.54	0.55	0.54	0.39	0.18
2100	0.13	0.15	0.17	0.43	0.44	0.43	0.45	0.56	0.59	0.54	0.35	0.21
2200	0.12	0.14	0.17	0.38	0.46	0.45	0.41	0.54	0.57	0.56	0.31	0.20
2300	0.11	0.15	0.16	0.37	0.43	0.46	0.42	0.50	0.57	0.50	0.28	0.19
All	2.79	2.52	3.21	8.95	11.66	11.23	11.29	12.91	14.20	10.59	6.76	3.86

e. Only wake and hysteresis losses have been included in the calculation

Petauke monthly and diurnal production matrix

Hour	Energy Production ^a [%]											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0000	0.17	0.13	0.39	0.47	0.41	0.56	0.61	0.69	0.57	0.63	0.29	0.22
0100	0.20	0.11	0.37	0.47	0.39	0.51	0.63	0.58	0.57	0.55	0.26	0.21
0200	0.17	0.12	0.35	0.44	0.42	0.49	0.57	0.60	0.57	0.53	0.27	0.20
0300	0.18	0.13	0.36	0.40	0.43	0.48	0.49	0.57	0.59	0.54	0.34	0.17
0400	0.19	0.15	0.33	0.40	0.40	0.49	0.47	0.51	0.60	0.51	0.34	0.20
0500	0.18	0.11	0.32	0.40	0.42	0.50	0.51	0.51	0.62	0.52	0.37	0.19
0600	0.15	0.09	0.31	0.40	0.38	0.49	0.49	0.52	0.61	0.53	0.39	0.17
0700	0.07	0.06	0.26	0.32	0.30	0.41	0.46	0.46	0.47	0.50	0.35	0.16
0800	0.07	0.08	0.34	0.37	0.33	0.31	0.40	0.51	0.49	0.64	0.30	0.19
0900	0.08	0.08	0.37	0.35	0.31	0.33	0.48	0.51	0.57	0.60	0.25	0.17
1000	0.13	0.05	0.30	0.30	0.24	0.27	0.39	0.45	0.53	0.47	0.23	0.15
1100	0.14	0.06	0.25	0.22	0.18	0.22	0.25	0.36	0.44	0.38	0.22	0.14
1200	0.15	0.06	0.21	0.16	0.15	0.18	0.19	0.29	0.38	0.33	0.15	0.11
1300	0.12	0.06	0.20	0.16	0.13	0.15	0.19	0.26	0.37	0.29	0.14	0.12
1400	0.14	0.07	0.15	0.14	0.13	0.15	0.20	0.24	0.34	0.30	0.13	0.12
1500	0.14	0.08	0.19	0.17	0.13	0.19	0.20	0.23	0.36	0.29	0.15	0.12
1600	0.13	0.08	0.22	0.20	0.17	0.23	0.25	0.26	0.43	0.30	0.23	0.15
1700	0.13	0.09	0.25	0.24	0.25	0.33	0.33	0.34	0.47	0.37	0.29	0.17
1800	0.18	0.14	0.35	0.39	0.41	0.56	0.52	0.50	0.61	0.44	0.37	0.23
1900	0.23	0.17	0.42	0.52	0.48	0.64	0.69	0.67	0.73	0.61	0.46	0.27
2000	0.21	0.13	0.47	0.52	0.50	0.64	0.73	0.69	0.71	0.71	0.45	0.28
2100	0.19	0.13	0.50	0.51	0.48	0.69	0.71	0.74	0.67	0.69	0.39	0.25
2200	0.15	0.10	0.45	0.46	0.49	0.66	0.70	0.77	0.67	0.71	0.30	0.22
2300	0.15	0.11	0.40	0.48	0.45	0.63	0.67	0.76	0.62	0.71	0.29	0.24
All	3.65	2.38	7.74	8.49	7.96	10.09	11.13	12.04	12.98	12.12	6.96	4.47

f. Only wake and hysteresis losses have been included in the calculation

Mansa monthly and diurnal production matrix

Hour	Energy Production ^a [%]											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0000	0.17	0.14	0.32	0.55	0.66	0.68	0.71	0.64	0.67	0.34	0.25	0.15
0100	0.18	0.13	0.29	0.51	0.71	0.70	0.73	0.65	0.67	0.32	0.26	0.15
0200	0.18	0.14	0.28	0.50	0.67	0.69	0.71	0.67	0.59	0.33	0.21	0.15
0300	0.19	0.12	0.23	0.47	0.67	0.69	0.71	0.63	0.56	0.35	0.26	0.15
0400	0.18	0.16	0.21	0.46	0.63	0.67	0.69	0.64	0.56	0.35	0.23	0.14
0500	0.16	0.17	0.21	0.46	0.61	0.66	0.66	0.65	0.57	0.38	0.21	0.12
0600	0.14	0.14	0.20	0.43	0.61	0.64	0.69	0.63	0.57	0.34	0.23	0.12
0700	0.09	0.11	0.16	0.41	0.46	0.54	0.62	0.54	0.44	0.27	0.19	0.07
0800	0.08	0.06	0.21	0.50	0.50	0.46	0.45	0.47	0.52	0.33	0.22	0.07
0900	0.08	0.06	0.27	0.52	0.59	0.53	0.57	0.59	0.61	0.35	0.19	0.07
1000	0.09	0.05	0.26	0.49	0.52	0.45	0.57	0.58	0.57	0.30	0.18	0.06
1100	0.08	0.04	0.19	0.41	0.43	0.35	0.46	0.49	0.45	0.23	0.15	0.06
1200	0.06	0.06	0.17	0.34	0.35	0.27	0.36	0.40	0.37	0.19	0.11	0.07
1300	0.08	0.08	0.16	0.31	0.32	0.22	0.30	0.34	0.33	0.15	0.10	0.09
1400	0.09	0.08	0.15	0.27	0.30	0.23	0.28	0.31	0.33	0.15	0.10	0.12
1500	0.12	0.11	0.17	0.28	0.34	0.21	0.29	0.30	0.38	0.22	0.16	0.12
1600	0.12	0.13	0.16	0.26	0.38	0.24	0.31	0.34	0.42	0.29	0.13	0.12
1700	0.16	0.16	0.18	0.28	0.34	0.28	0.33	0.34	0.43	0.32	0.15	0.09
1800	0.14	0.15	0.22	0.36	0.48	0.52	0.49	0.50	0.51	0.34	0.14	0.09
1900	0.15	0.13	0.27	0.45	0.59	0.62	0.58	0.65	0.58	0.40	0.20	0.13
2000	0.15	0.10	0.31	0.49	0.59	0.66	0.59	0.64	0.56	0.41	0.22	0.12
2100	0.17	0.12	0.33	0.47	0.60	0.63	0.62	0.58	0.60	0.39	0.24	0.14
2200	0.18	0.14	0.34	0.49	0.66	0.64	0.63	0.61	0.64	0.38	0.25	0.15
2300	0.18	0.14	0.35	0.55	0.65	0.64	0.66	0.64	0.69	0.37	0.24	0.15
All	3.17	2.74	5.64	10.27	12.64	12.22	13.01	12.82	12.63	7.51	4.64	2.70

g. Only wake and hysteresis losses have been included in the calculation

Malawi monthly and diurnal production matrix

Hour	Energy Production ^a [%]											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0000	0.18	0.07	0.27	0.35	0.42	0.60	0.56	0.62	0.62	0.65	0.30	0.22
0100	0.16	0.10	0.28	0.34	0.44	0.61	0.62	0.64	0.64	0.63	0.29	0.24
0200	0.12	0.10	0.28	0.42	0.49	0.58	0.64	0.68	0.64	0.60	0.28	0.20
0300	0.11	0.09	0.22	0.37	0.53	0.59	0.65	0.66	0.60	0.59	0.30	0.20
0400	0.16	0.08	0.27	0.38	0.47	0.58	0.57	0.63	0.59	0.58	0.30	0.22
0500	0.11	0.09	0.26	0.36	0.43	0.59	0.58	0.63	0.58	0.55	0.29	0.21
0600	0.09	0.10	0.24	0.34	0.45	0.57	0.50	0.62	0.59	0.48	0.29	0.17
0700	0.07	0.07	0.22	0.26	0.28	0.36	0.32	0.46	0.41	0.47	0.34	0.14
0800	0.10	0.08	0.25	0.35	0.36	0.27	0.24	0.49	0.47	0.63	0.40	0.20
0900	0.11	0.08	0.23	0.40	0.42	0.33	0.34	0.59	0.61	0.59	0.38	0.22
1000	0.11	0.08	0.18	0.33	0.39	0.32	0.34	0.48	0.56	0.53	0.32	0.17
1100	0.11	0.06	0.13	0.26	0.30	0.21	0.24	0.40	0.49	0.48	0.28	0.18
1200	0.14	0.06	0.12	0.20	0.23	0.15	0.19	0.32	0.44	0.46	0.26	0.15
1300	0.16	0.07	0.12	0.22	0.20	0.13	0.17	0.28	0.42	0.44	0.24	0.18
1400	0.16	0.10	0.10	0.19	0.18	0.13	0.16	0.27	0.43	0.46	0.29	0.16
1500	0.18	0.15	0.12	0.22	0.20	0.13	0.17	0.31	0.47	0.50	0.35	0.21
1600	0.13	0.07	0.11	0.25	0.23	0.15	0.18	0.28	0.50	0.60	0.43	0.26
1700	0.13	0.11	0.15	0.24	0.26	0.20	0.21	0.30	0.52	0.67	0.46	0.18
1800	0.15	0.12	0.19	0.34	0.47	0.44	0.47	0.54	0.62	0.62	0.41	0.18
1900	0.17	0.18	0.27	0.40	0.55	0.64	0.69	0.70	0.75	0.69	0.37	0.23
2000	0.21	0.17	0.30	0.32	0.52	0.51	0.62	0.69	0.73	0.66	0.34	0.28
2100	0.21	0.18	0.29	0.34	0.47	0.47	0.55	0.62	0.64	0.67	0.31	0.30
2200	0.21	0.15	0.27	0.39	0.40	0.54	0.52	0.53	0.56	0.68	0.33	0.24
2300	0.23	0.11	0.28	0.35	0.39	0.58	0.53	0.54	0.60	0.68	0.25	0.22
All	3.50	2.48	5.18	7.62	9.08	9.68	10.04	12.27	13.46	13.91	7.83	4.96

h. Only wake and hysteresis losses have been included in the calculation

APPENDIX F UNCERTAINTY ANALYSIS

Uncertainty in the projected energy output for the Choma site

Source of uncertainty/variability	[GWh/annum]		Equivalent standard deviation [%]	
Measurement accuracy	10.4		3.4%	
Long-term measurement height wind regime	26.7		8.8%	
Vertical extrapolation	21.3		7.0%	
Spatial extrapolation	12.2		4.0%	
Loss factors	5.1		1.7%	
Inter-annual variability	37.1		12.3%	
<i>Future period under consideration</i>	<i>1 year</i>	<i>10 year</i>	<i>1 year</i>	<i>10 year</i>
Overall energy uncertainty	54.6	40.0	18.0%	13.2%

Uncertainty in the projected energy output for the Mwinilunga site

Source of uncertainty/variability	[GWh/annum]		Equivalent standard deviation [%]	
Measurement accuracy	9.3		2.9%	
Long-term measurement height wind regime	22.3		6.9%	
Vertical extrapolation	24.7		7.6%	
Spatial extrapolation	13.7		4.2%	
Loss factors	5.1		1.6%	
Inter-annual variability	33.5		10.4%	
<i>Future period under consideration</i>	<i>1 year</i>	<i>10 year</i>	<i>1 year</i>	<i>10 year</i>
Overall energy uncertainty	52.7	39.7	16.3%	12.3%

Uncertainty in the projected energy output for the Lusaka site

Source of uncertainty/variability	[GWh/annum]		Equivalent standard deviation [%]	
Measurement accuracy	10.4		2.7%	
Long-term measurement height wind regime	31.8		8.2%	
Vertical extrapolation	27.4		7.1%	
Spatial extrapolation	15.4		4.0%	
Loss factors	5.3		1.4%	
Inter-annual variability	37.3		9.7%	
<i>Future period under consideration</i>	<i>1 year</i>	<i>10 year</i>	<i>1 year</i>	<i>10 year</i>
Overall energy uncertainty	62.4	48.9	16.2%	12.7%

Uncertainty in the projected energy output for the Mpika site

Source of uncertainty/variability	[GWh/annum]		Equivalent standard deviation [%]	
Measurement accuracy	11.1		3.5%	
Long-term measurement height wind regime	27.7		8.6%	
Vertical extrapolation	22.7		7.1%	
Spatial extrapolation	12.8		4.0%	
Loss factors	4.7		1.5%	
Inter-annual variability	39.5		12.3%	
<i>Future period under consideration</i>	<i>1 year</i>	<i>10 year</i>	<i>1 year</i>	<i>10 year</i>
Overall energy uncertainty	57.4	42.0	17.9%	13.1%

Uncertainty in the projected energy output for the Chanka site

Source of uncertainty/variability	[GWh/annum]		Equivalent standard deviation [%]	
Measurement accuracy	11.3		3.3%	
Long-term measurement height wind regime	34.4		9.9%	
Vertical extrapolation	23.2		6.7%	
Spatial extrapolation	23.3		6.7%	
Loss factors	4.8		1.4%	
Inter-annual variability	40.6		11.8%	
<i>Future period under consideration</i>	<i>1 year</i>	<i>10 year</i>	<i>1 year</i>	<i>10 year</i>
Overall energy uncertainty	66.4	51.3	19.2%	14.8%

Uncertainty in the projected energy output for the Petauke site

Source of uncertainty/variability	[GWh/annum]		Equivalent standard deviation [%]	
Measurement accuracy	10.1		3.5%	
Long-term measurement height wind regime	23.7		8.1%	
Vertical extrapolation	26.9		9.2%	
Spatial extrapolation	20.8		7.1%	
Loss factors	4.8		1.7%	
Inter-annual variability	36.3		12.4%	
<i>Future period under consideration</i>	<i>1 year</i>	<i>10 year</i>	<i>1 year</i>	<i>10 year</i>
Overall energy uncertainty	57.6	45.2	19.8%	15.5%

Uncertainty in the projected energy output for the Mansa site

Source of uncertainty/variability	[GWh/annum]		Equivalent standard deviation [%]	
Measurement accuracy	9.8		3.1%	
Long-term measurement height wind regime	22.7		7.2%	
Vertical extrapolation	26.0		8.3%	
Spatial extrapolation	17.4		5.5%	
Loss factors	4.4		1.4%	
Inter-annual variability	35.5		11.3%	
<i>Future period under consideration</i>	<i>1 year</i>	<i>10 year</i>	<i>1 year</i>	<i>10 year</i>
Overall energy uncertainty	55.5	42.2	17.6%	13.4%

Uncertainty in the projected energy output for the Malawi site

Source of uncertainty/variability	[GWh/annum]		Equivalent standard deviation [%]	
Measurement accuracy	10.3		3.4%	
Long-term measurement height wind regime	23.9		7.9%	
Vertical extrapolation	26.8		8.8%	
Spatial extrapolation	17.9		5.9%	
Loss factors	4.3		1.4%	
Inter-annual variability	36.5		12.0%	
<i>Future period under consideration</i>	<i>1 year</i>	<i>10 year</i>	<i>1 year</i>	<i>10 year</i>
Overall energy uncertainty	57.2	44.1	18.8%	14.5%

APPENDIX G SITE CONDITIONS

Table G-1 Predicted profiles of design equivalent turbulence intensity at the Choma site for a Generic 4 MW wind turbine at a hub height of 130 m

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]																	IEC 61400-1 Ed3 Turbine Subclass		
	Cho_01	Cho_02	Cho_03	Cho_04	Cho_05	Cho_06	Cho_07	Cho_08	Cho_09	Cho_10	Cho_11	Cho_12	Cho_13	Cho_14	Cho_15	Cho_16	Cho_17	A	B	C
3	36.0	35.2	35.3	35.6	35.9	36.1	36.1	35.0	35.9	36.2	36.3	36.3	35.1	35.8	35.7	35.1	35.9	41.9	36.6	31.4
4	30.0	28.7	28.9	29.3	29.6	30.2	30.2	28.4	30.1	30.4	30.6	30.4	28.5	29.9	29.3	28.6	30.0	34.4	30.1	25.8
5	26.4	24.2	24.9	25.4	25.5	26.2	26.2	24.0	26.2	26.5	26.7	26.3	24.0	25.8	25.3	24.3	26.1	29.9	26.2	22.4
6	24.0	21.0	22.0	22.7	22.6	23.5	23.5	20.7	23.5	23.9	24.0	23.5	20.7	23.1	22.3	21.3	23.5	26.9	23.6	20.2
7	21.7	18.2	19.3	20.2	20.1	21.1	21.1	17.8	21.2	21.6	21.8	21.2	17.7	20.7	19.7	18.5	21.2	24.8	21.7	18.6
8	20.1	16.4	17.4	18.4	18.2	19.3	19.4	15.8	19.5	19.9	20.1	19.5	15.7	18.9	17.9	16.5	19.5	23.2	20.3	17.4
9	18.8	15.3	15.7	16.8	16.6	17.8	17.9	14.4	18.1	18.4	18.6	18.0	14.1	17.4	16.3	15.1	18.1	22.0	19.2	16.5
10	16.9	14.0	14.0	15.0	14.8	16.1	16.1	13.0	16.4	16.7	16.9	16.3	12.6	15.8	14.6	13.6	16.4	21.0	18.3	15.7
11	14.9	12.2	12.2	13.2	13.1	14.3	14.2	11.4	14.5	14.7	14.9	14.5	11.1	14.1	12.8	12.2	14.6	20.1	17.6	15.1
12	13.0	10.8	10.6	11.5	11.5	12.5	12.5	10.0	12.7	12.9	13.1	12.7	9.7	12.3	11.2	10.8	12.8	19.5	17.0	14.6
13	11.9	9.8	9.5	10.3	10.4	11.1	11.2	9.0	11.3	11.6	11.7	11.2	8.7	10.8	10.2	9.7	11.3	18.9	16.5	14.2
14	11.0	8.8	8.8	9.5	9.6	10.2	10.2	8.2	10.3	10.5	10.7	10.1	8.0	9.8	9.5	9.1	10.4	18.4	16.1	13.8
15	10.3	8.0	8.3	9.0	9.1	9.6	9.7	7.5	9.8	9.9	10.1	9.8	7.4	9.3	8.9	8.5	9.7	18.0	15.7	13.5
16	10.3	8.2	9.0	9.4	9.5	10.0	10.3	8.2	10.5	10.4	10.7	10.8	8.7	10.0	9.3	8.7	10.2	17.6	15.4	13.2
17	11.2	10.1	10.5	10.7	10.7	11.5	11.6	10.2	12.1	11.7	12.0	12.3	10.9	11.9	10.9	10.7	11.9	17.3	15.1	13.0
18	11.6	11.7	11.8	11.8	11.9	12.5	12.4	11.8	12.8	12.4	12.8	12.8	12.1	13.2	12.1	12.2	13.0	17.0	14.9	12.7
19	11.7	11.8	11.8	11.8	11.9	12.9	12.8	12.0	12.8	12.6	13.1	12.6	12.1	13.1	12.0	12.1	13.1	16.7	14.6	12.5
20	11.6	11.7	11.7	11.7	11.7	11.7	-	-	-	-	-	-	-	-	-	-	-	16.5	14.4	12.4
21	11.8	11.8	12.4	12.7	12.2	11.7	11.7	11.7	11.8	11.7	11.8	11.8	11.7	-	11.7	11.7	11.7	16.3	14.2	12.2
22	11.7	11.7	12.2	12.5	12.0	11.5	11.5	11.5	11.7	11.6	11.7	11.7	11.6	11.4	11.5	11.6	11.6	16.1	14.1	12.1
23	-	-	-	-	11.4	11.4	11.4	11.4	-	11.3	11.4	-	11.4	11.3	11.4	11.4	11.3	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass B limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]								IEC 61400-1 Ed3 Turbine Subclass		
	Cho_18	Cho_19	Cho_20	Cho_21	Cho_22	Cho_23	Cho_24	Cho_25	A	B	C
3	35.0	35.2	35.6	35.5	35.1	35.1	36.0	35.1	41.9	36.6	31.4
4	28.5	28.8	29.4	29.2	28.5	28.6	29.8	28.6	34.4	30.1	25.8
5	24.0	24.8	25.4	25.1	24.1	24.3	26.0	24.2	29.9	26.2	22.4
6	20.7	21.8	22.7	22.2	20.9	21.1	23.3	21.1	26.9	23.6	20.2
7	17.8	19.3	20.4	19.7	18.0	18.2	20.9	18.3	24.8	21.7	18.6
8	15.8	17.5	18.7	17.9	15.8	16.0	19.1	16.4	23.2	20.3	17.4
9	14.4	16.0	17.3	16.5	14.1	14.3	17.7	15.1	22.0	19.2	16.5
10	13.0	14.5	15.7	14.9	12.6	12.6	15.9	13.7	21.0	18.3	15.7
11	11.4	13.0	14.1	13.4	11.1	11.0	13.9	12.1	20.1	17.6	15.1
12	10.0	11.6	12.4	11.9	9.7	9.6	12.2	10.7	19.5	17.0	14.6
13	9.0	10.5	11.1	10.8	8.7	8.7	11.1	9.7	18.9	16.5	14.2
14	8.3	9.8	10.2	10.0	8.2	8.2	10.3	8.9	18.4	16.1	13.8
15	7.6	9.0	9.4	9.2	7.7	7.8	9.7	8.2	18.0	15.7	13.5
16	8.8	9.2	9.5	9.5	8.7	8.4	9.9	8.5	17.6	15.4	13.2
17	11.1	10.9	11.3	11.2	10.8	10.2	11.0	10.4	17.3	15.1	13.0
18	12.2	12.4	13.0	12.5	12.3	11.9	11.6	12.0	17.0	14.9	12.7
19	12.2	12.1	13.1	12.3	12.1	11.9	11.8	11.9	16.7	14.6	12.5
20	-	-	12.9	12.1	-	11.7	11.6	11.7	16.5	14.4	12.4
21	11.7	11.8	11.7	11.8	11.7	11.7	11.7	11.7	16.3	14.2	12.2
22	11.6	11.7	11.6	11.7	11.6	11.5	11.6	11.6	16.1	14.1	12.1
23	11.4	-	11.4	-	-	11.4	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass A limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Table G-2 Predicted profiles of design equivalent turbulence intensity at the Mwinilunga site for a Generic 4 MW wind turbine at a hub height of 130 m

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]																	IEC 61400-1 Ed3 Turbine Subclass		
	Mwi_01	Mwi_02	Mwi_03	Mwi_04	Mwi_05	Mwi_06	Mwi_07	Mwi_08	Mwi_09	Mwi_10	Mwi_11	Mwi_12	Mwi_13	Mwi_14	Mwi_15	Mwi_16	Mwi_17	A	B	C
3	34.1	33.1	34.0	33.7	33.6	33.7	33.8	32.8	33.2	33.5	32.6	33.2	33.7	32.8	32.9	33.0	32.7	41.9	36.6	31.4
4	29.0	27.9	29.3	29.0	28.9	28.9	28.4	27.3	28.0	28.3	27.3	27.9	28.4	27.4	27.9	27.7	27.3	34.4	30.1	25.8
5	25.8	24.7	26.3	26.0	25.9	25.9	25.0	24.0	24.7	25.1	23.9	24.7	25.1	24.0	24.7	24.4	23.9	29.9	26.2	22.4
6	23.6	22.5	24.3	23.9	23.8	23.8	22.6	21.5	22.4	22.8	21.5	22.3	22.9	21.6	22.5	22.0	21.4	26.9	23.6	20.2
7	21.7	20.7	22.7	22.3	22.2	22.1	20.8	19.3	20.7	21.0	19.4	20.5	21.0	19.4	20.8	20.1	19.3	24.8	21.7	18.6
8	19.8	19.0	21.1	20.7	20.6	20.4	18.8	17.4	19.0	19.2	17.5	18.8	19.2	17.4	19.3	18.4	17.3	23.2	20.3	17.4
9	18.0	17.4	19.4	18.9	18.8	18.5	16.7	15.7	17.1	17.4	15.7	16.9	17.3	15.5	17.7	16.6	15.5	22.0	19.2	16.5
10	15.6	15.2	16.8	16.4	16.3	16.0	14.1	13.4	14.7	15.0	13.5	14.4	14.8	13.1	15.3	14.2	13.4	21.0	18.3	15.7
11	13.2	12.7	14.0	13.6	13.6	13.3	11.4	10.9	12.1	12.5	11.3	11.8	12.1	10.4	12.4	11.5	11.1	20.1	17.6	15.1
12	11.5	10.6	11.8	11.4	11.5	11.5	9.2	8.7	10.0	10.4	9.3	9.9	10.0	7.9	9.9	9.2	9.2	19.5	17.0	14.6
13	10.4	9.4	10.5	10.2	10.4	10.4	7.7	7.0	8.7	9.1	7.7	8.7	8.9	6.7	8.3	7.7	8.0	18.9	16.5	14.2
14	9.7	8.9	9.8	9.4	9.7	9.5	7.3	6.6	8.1	8.4	6.7	8.1	8.3	7.0	7.4	7.1	7.5	18.4	16.1	13.8
15	9.0	8.5	9.1	8.6	8.8	8.7	7.3	6.4	7.9	8.1	6.6	7.6	7.5	6.7	7.2	6.9	7.3	18.0	15.7	13.5
16	8.4	8.1	8.3	8.2	8.9	9.8	7.8	8.7	8.4	8.7	9.0	7.8	7.7	6.7	8.7	9.5	9.9	17.6	15.4	13.2
17	10.5	10.6	10.0	9.6	9.9	11.0	11.1	10.4	11.8	11.3	11.1	9.7	9.9	10.0	10.8	10.6	10.8	17.3	15.1	13.0
18	11.8	12.7	11.1	11.0	11.5	11.7	12.0	10.4	12.0	11.9	12.0	11.5	11.6	11.6	11.5	11.7	11.2	17.0	14.9	12.7
19	11.6	12.7	11.3	11.3	11.4	11.7	-	11.2	11.5	11.5	11.6	11.4	11.4	11.4	11.6	-	-	16.7	14.6	12.5
20	-	-	11.1	11.1	10.9	11.0	-	-	-	-	-	11.2	-	-	11.0	-	-	16.5	14.4	12.4
21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	16.3	14.2	12.2
22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass B limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]								IEC 61400-1 Ed3 Turbine Subclass		
	Mwi _18	Mwi _19	Mwi _20	Mwi _21	Mwi _22	Mwi _23	Mwi _24	Mwi _25	A	B	C
3	33.2	33.4	33.5	33.9	33.8	33.9	33.4	33.0	41.9	36.6	31.4
4	27.8	28.1	28.1	28.5	28.4	28.5	28.1	27.6	34.4	30.1	25.8
5	24.5	24.8	24.7	25.1	25.0	25.2	24.9	24.2	29.9	26.2	22.4
6	22.2	22.5	22.3	22.7	22.7	22.9	22.6	21.7	26.9	23.6	20.2
7	20.3	20.6	20.5	20.9	20.8	21.1	20.6	19.6	24.8	21.7	18.6
8	18.3	18.7	18.6	18.9	19.0	19.4	18.6	17.7	23.2	20.3	17.4
9	16.5	16.9	16.6	16.8	17.1	17.4	16.6	15.8	22.0	19.2	16.5
10	14.1	14.6	14.2	14.3	14.6	14.8	14.1	13.6	21.0	18.3	15.7
11	11.5	12.1	11.6	11.6	11.9	12.0	11.6	11.3	20.1	17.6	15.1
12	9.8	10.2	9.7	9.4	9.4	9.6	9.8	9.5	19.5	17.0	14.6
13	8.8	8.7	8.1	8.0	7.6	8.1	8.6	8.3	18.9	16.5	14.2
14	8.4	8.1	7.4	7.4	7.0	7.4	7.8	7.4	18.4	16.1	13.8
15	7.7	7.6	7.3	7.2	7.2	7.4	7.1	6.8	18.0	15.7	13.5
16	8.5	8.4	7.7	7.7	10.0	9.7	6.7	8.2	17.6	15.4	13.2
17	10.0	10.2	9.5	10.7	10.5	10.9	11.0	11.4	17.3	15.1	13.0
18	11.6	11.6	11.5	11.7	11.5	11.7	11.9	12.1	17.0	14.9	12.7
19	11.5	11.5	11.4	9.2	7.8	-	-	-	16.7	14.6	12.5
20	-	-	11.2	-	-	-	-	-	16.5	14.4	12.4
21	-	-	-	-	-	-	-	-	16.3	14.2	12.2
22	-	-	-	-	-	-	-	-	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass A limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Table G-3 Predicted profiles of design equivalent turbulence intensity at the Lusaka site for a Generic 4 MW wind turbine at a hub height of 130 m

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]																	IEC 61400-1 Ed3 Turbine Subclass		
	Lus_01	Lus_02	Lus_03	Lus_04	Lus_05	Lus_06	Lus_07	Lus_08	Lus_09	Lus_10	Lus_11	Lus_12	Lus_13	Lus_14	Lus_15	Lus_16	Lus_17	A	B	C
3	34.0	34.5	33.8	34.3	34.2	33.9	33.9	34.8	34.6	34.6	34.8	34.0	33.9	34.4	34.4	33.8	34.0	41.9	36.6	31.4
4	28.7	29.1	28.3	29.1	28.8	28.4	28.4	29.5	29.3	29.5	29.5	28.5	28.5	29.1	29.0	28.3	28.7	34.4	30.1	25.8
5	25.1	25.5	24.6	25.6	25.1	24.7	24.8	25.9	25.8	26.1	25.8	24.9	25.1	25.5	25.4	24.7	25.3	29.9	26.2	22.4
6	22.9	23.3	22.3	23.5	22.8	22.5	22.5	23.9	23.6	24.1	23.7	22.6	22.9	23.3	23.2	22.5	23.2	26.9	23.6	20.2
7	21.0	21.3	20.3	21.6	20.9	20.5	20.5	22.0	21.7	22.4	21.7	20.6	21.1	21.3	21.2	20.6	21.3	24.8	21.7	18.6
8	19.2	19.5	18.5	19.8	19.2	18.8	18.7	20.2	19.9	20.9	19.9	18.8	19.6	19.5	19.4	18.9	19.7	23.2	20.3	17.4
9	17.4	17.6	16.6	18.0	17.2	16.9	16.8	18.3	17.7	19.3	18.0	16.8	17.9	17.6	17.3	17.0	17.9	22.0	19.2	16.5
10	15.3	15.4	14.5	15.8	15.0	14.7	14.7	16.1	15.3	17.4	15.8	14.6	16.0	15.5	15.1	14.8	16.0	21.0	18.3	15.7
11	12.6	12.7	11.8	13.3	12.3	12.0	12.0	13.4	12.6	15.1	13.1	12.0	13.7	12.9	12.4	12.2	13.6	20.1	17.6	15.1
12	10.3	10.3	9.4	11.0	10.0	9.6	9.6	11.1	10.2	13.0	10.7	9.5	11.5	10.6	9.9	9.8	11.4	19.5	17.0	14.6
13	9.1	9.1	8.0	9.6	8.6	8.2	8.2	9.7	8.7	11.5	9.3	8.1	10.1	9.1	8.5	8.3	10.0	18.9	16.5	14.2
14	7.7	7.8	6.9	8.4	7.4	6.9	7.1	8.2	7.6	10.3	8.0	7.1	8.9	7.8	7.5	7.1	8.9	18.4	16.1	13.8
15	7.0	7.0	6.2	7.5	6.4	6.1	6.4	7.3	6.6	9.2	7.1	6.2	7.9	6.9	6.9	6.1	8.0	18.0	15.7	13.5
16	6.4	6.3	5.7	6.9	5.8	5.8	6.1	6.5	5.9	8.5	6.4	5.7	7.4	6.3	6.3	5.7	7.4	17.6	15.4	13.2
17	7.2	6.9	6.8	6.9	6.6	6.6	6.6	6.6	6.4	8.4	6.5	6.5	7.5	6.5	6.6	6.5	7.4	17.3	15.1	13.0
18	4.4	5.2	5.9	5.3	5.2	5.5	5.5	5.7	6.3	7.4	5.6	5.6	6.6	5.6	5.6	5.6	6.7	17.0	14.9	12.7
19	9.6	8.9	8.7	7.1	7.1	7.2	7.0	7.1	6.9	7.9	6.6	6.6	7.2	6.5	6.6	6.8	6.5	16.7	14.6	12.5
20	12.2	12.1	12.0	12.1	12.1	12.1	12.1	12.1	12.0	12.2	12.1	12.1	12.1	12.1	12.1	12.1	12.1	16.5	14.4	12.4
21	12.1	12.0	11.9	12.0	12.0	11.9	11.9	12.0	11.9	12.0	12.0	12.0	12.0	12.0	12.0	12.0	11.9	16.3	14.2	12.2
22	12.0	12.1	12.0	12.0	12.0	12.1	12.1	12.3	12.3	12.3	12.3	12.3	12.4	12.3	12.4	12.3	12.2	16.1	14.1	12.1
23	11.8	-	11.8	11.8	11.9	12.0	12.0	-	-	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass B limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]								IEC 61400-1 Ed3 Turbine Subclass		
	Lus_18	Lus_19	Lus_20	Lus_21	Lus_22	Lus_23	Lus_24	Lus_25	A	B	C
3	33.6	34.3	34.5	33.6	33.9	34.5	34.5	33.5	41.9	36.6	31.4
4	28.0	29.1	29.2	28.1	28.5	29.3	29.3	28.0	34.4	30.1	25.8
5	24.3	25.5	25.7	24.4	25.1	25.7	25.6	24.3	29.9	26.2	22.4
6	22.0	23.4	23.6	22.1	23.0	23.5	23.4	22.0	26.9	23.6	20.2
7	20.1	21.5	21.7	20.3	21.1	21.6	21.5	20.1	24.8	21.7	18.6
8	18.6	19.6	19.9	18.7	19.4	19.8	19.7	18.4	23.2	20.3	17.4
9	16.7	17.7	17.9	16.9	17.4	17.9	17.7	16.6	22.0	19.2	16.5
10	14.6	15.6	15.6	14.8	15.2	15.8	15.4	14.6	21.0	18.3	15.7
11	12.0	13.0	12.9	12.2	12.5	13.1	12.7	12.0	20.1	17.6	15.1
12	9.7	10.7	10.5	9.9	10.1	10.8	10.4	9.6	19.5	17.0	14.6
13	8.3	9.3	9.1	8.4	8.6	9.4	8.9	8.2	18.9	16.5	14.2
14	7.0	8.0	8.0	7.3	7.2	8.1	7.7	7.1	18.4	16.1	13.8
15	6.0	7.2	7.3	6.3	6.3	7.2	6.8	6.4	18.0	15.7	13.5
16	5.7	6.6	6.7	5.7	5.8	6.5	6.2	5.8	17.6	15.4	13.2
17	6.5	6.6	6.7	6.5	6.5	6.7	6.4	6.5	17.3	15.1	13.0
18	5.6	5.6	5.6	5.6	5.9	5.8	5.9	5.6	17.0	14.9	12.7
19	6.5	6.5	6.5	6.5	7.2	6.3	6.6	6.4	16.7	14.6	12.5
20	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	16.5	14.4	12.4
21	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	16.3	14.2	12.2
22	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass A limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Table G-4 Predicted profiles of design equivalent turbulence intensity at the Mpika site for a Generic 4 MW wind turbine at a hub height of 130 m

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]																	IEC 61400-1 Ed3 Turbine Subclass		
	Mpi_01	Mpi_02	Mpi_03	Mpi_04	Mpi_05	Mpi_06	Mpi_07	Mpi_08	Mpi_09	Mpi_10	Mpi_11	Mpi_12	Mpi_13	Mpi_14	Mpi_15	Mpi_16	Mpi_17	A	B	C
3	32.6	33.0	33.2	33.2	33.0	32.9	33.0	33.3	33.2	32.9	33.0	33.4	32.9	33.1	33.1	33.1	33.3	41.9	36.6	31.4
4	27.3	27.8	28.0	28.0	27.7	27.5	27.7	28.2	27.9	27.5	27.7	28.3	27.6	27.9	27.9	27.9	28.2	34.4	30.1	25.8
5	23.9	24.6	24.6	24.7	24.3	24.0	24.2	24.7	24.3	24.0	24.1	24.7	24.1	24.3	24.3	24.3	24.6	29.9	26.2	22.4
6	21.6	22.5	22.5	22.7	22.2	21.7	22.1	22.4	21.9	21.6	21.7	22.3	21.7	21.9	21.8	21.9	22.1	26.9	23.6	20.2
7	19.2	20.2	20.3	20.5	19.9	19.3	19.8	20.1	19.4	19.1	19.2	19.8	19.2	19.4	19.1	19.4	19.6	24.8	21.7	18.6
8	17.0	18.3	18.2	18.6	17.9	17.1	17.7	18.0	17.2	16.9	16.9	17.5	17.2	17.1	16.8	17.1	17.3	23.2	20.3	17.4
9	15.3	16.8	16.6	17.1	16.3	15.5	16.1	16.3	15.4	15.2	15.1	15.6	15.6	15.3	15.0	15.3	15.4	22.0	19.2	16.5
10	13.9	15.3	15.0	15.6	14.7	14.0	14.5	14.6	13.8	13.7	13.7	14.0	14.3	13.8	13.6	13.8	13.8	21.0	18.3	15.7
11	12.8	14.1	13.7	14.4	13.5	12.9	13.2	13.3	12.8	12.7	12.7	12.9	13.4	12.8	12.8	12.7	12.8	20.1	17.6	15.1
12	12.3	13.2	12.8	13.5	12.7	12.1	12.2	12.4	12.2	12.1	12.0	12.2	12.5	12.2	12.2	12.1	12.1	19.5	17.0	14.6
13	12.7	13.2	12.8	13.3	12.7	12.3	12.4	12.6	12.4	12.2	12.1	12.3	12.5	12.4	12.4	12.1	12.0	18.9	16.5	14.2
14	13.2	13.5	13.3	13.5	13.2	13.1	13.2	13.2	13.1	12.9	12.8	12.9	13.2	13.1	13.2	12.7	12.5	18.4	16.1	13.8
15	14.0	13.8	13.6	13.8	13.3	13.2	12.9	13.2	12.9	13.1	13.1	13.1	13.3	13.3	13.3	12.9	12.9	18.0	15.7	13.5
16	14.9	15.0	15.1	15.1	15.4	15.6	16.1	15.8	15.9	15.3	14.9	15.3	15.6	15.7	15.9	15.1	14.5	17.6	15.4	13.2
17	14.1	14.5	14.2	14.1	13.8	13.6	13.7	13.6	13.3	13.6	13.8	13.6	13.5	13.4	13.2	13.8	14.1	17.3	15.1	13.0
18	12.6	12.5	12.6	12.7	12.8	13.2	13.6	14.1	14.0	13.4	13.2	13.9	13.1	14.3	14.4	13.5	13.7	17.0	14.9	12.7
19	12.6	12.5	12.5	12.7	12.7	12.7	13.0	14.5	14.4	14.1	13.5	15.2	12.9	14.2	14.8	13.9	14.2	16.7	14.6	12.5
20	12.2	12.1	12.2	12.6	12.7	12.7	12.6	12.5	12.5	12.6	12.7	12.6	12.9	12.5	12.6	12.7	12.8	16.5	14.4	12.4
21	12.1	11.9	12.0	12.3	12.4	-	-	12.3	12.3	12.3	12.3	12.3	12.7	12.3	-	12.3	12.3	16.3	14.2	12.2
22	-	11.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass B limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]								IEC 61400-1 Ed3 Turbine Subclass		
	Mpi_18	Mpi_19	Mpi_20	Mpi_21	Mpi_22	Mpi_23	Mpi_24	Mpi_25	A	B	C
3	33.1	32.6	32.8	33.2	33.2	33.5	33.6	32.8	41.9	36.6	31.4
4	27.8	27.2	27.6	28.0	28.0	28.3	28.5	27.5	34.4	30.1	25.8
5	24.2	23.6	24.0	24.4	24.4	24.8	24.9	23.9	29.9	26.2	22.4
6	21.7	21.0	21.7	22.0	22.0	22.3	22.4	21.4	26.9	23.6	20.2
7	19.1	18.4	19.2	19.5	19.5	19.8	19.8	18.6	24.8	21.7	18.6
8	16.8	16.1	17.0	17.2	17.2	17.6	17.5	16.3	23.2	20.3	17.4
9	15.0	14.4	15.2	15.4	15.4	15.7	15.7	14.6	22.0	19.2	16.5
10	13.6	13.2	13.8	13.9	13.9	14.1	14.1	13.4	21.0	18.3	15.7
11	12.6	12.5	12.9	12.9	12.9	13.0	13.0	12.7	20.1	17.6	15.1
12	12.1	12.0	12.4	12.3	12.3	12.4	12.4	12.3	19.5	17.0	14.6
13	12.1	12.2	12.7	12.6	12.6	12.6	12.6	12.7	18.9	16.5	14.2
14	12.7	12.7	13.3	13.2	13.2	13.1	13.2	13.3	18.4	16.1	13.8
15	13.1	13.1	14.0	13.7	13.9	13.9	14.1	14.4	18.0	15.7	13.5
16	14.3	13.9	15.5	15.7	15.7	15.3	15.2	15.5	17.6	15.4	13.2
17	14.1	14.7	13.2	13.2	13.2	13.4	13.5	13.2	17.3	15.1	13.0
18	13.2	12.6	14.2	14.3	14.4	14.3	14.6	13.3	17.0	14.9	12.7
19	13.6	13.2	14.3	14.5	14.2	14.2	13.9	13.2	16.7	14.6	12.5
20	12.9	13.0	12.7	12.7	12.8	12.9	12.9	13.0	16.5	14.4	12.4
21	-	-	-	-	-	-	-	-	16.3	14.2	12.2
22	-	-	-	-	-	-	-	-	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass A limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Table G-5 Predicted profiles of design equivalent turbulence intensity at the Chanka site for a Generic 4 MW wind turbine at a hub height of 130 m

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]																	IEC 61400-1 Ed3 Turbine Subclass		
	Cha_01	Cha_02	Cha_03	Cha_04	Cha_05	Cha_06	Cha_07	Cha_08	Cha_09	Cha_10	Cha_11	Cha_12	Cha_13	Cha_14	Cha_15	Cha_16	Cha_17	A	B	C
3	32.0	33.8	33.9	32.7	33.3	32.5	33.3	33.2	33.4	32.5	33.2	33.8	33.9	33.1	33.3	33.9	32.8	41.9	36.6	31.4
4	25.8	28.6	28.7	26.8	27.5	26.5	27.7	27.4	27.9	26.6	28.0	28.5	28.9	27.4	27.4	28.0	27.1	34.4	30.1	25.8
5	22.3	25.6	25.6	23.4	24.2	22.9	24.6	24.3	24.7	22.9	25.3	25.5	25.9	24.1	24.3	24.8	23.5	29.9	26.2	22.4
6	20.0	23.4	23.4	21.2	21.9	20.8	22.3	22.1	22.6	21.1	23.2	23.4	23.8	22.1	22.1	22.8	21.6	26.9	23.6	20.2
7	18.2	21.0	21.3	19.8	19.8	19.3	20.0	20.3	20.8	19.7	20.8	21.5	21.7	20.6	20.0	20.9	20.1	24.8	21.7	18.6
8	16.7	18.8	19.1	18.0	18.0	17.8	18.0	18.5	19.1	18.3	18.5	19.5	19.7	19.0	18.2	19.2	18.7	23.2	20.3	17.4
9	15.5	16.7	17.1	16.4	16.3	16.3	16.2	16.8	17.3	16.6	16.5	17.6	17.7	17.2	16.6	17.4	17.0	22.0	19.2	16.5
10	14.8	15.3	15.7	15.4	15.2	15.2	14.9	15.5	15.7	15.3	15.0	16.0	15.9	15.8	15.2	15.7	15.5	21.0	18.3	15.7
11	14.2	14.4	14.6	14.4	14.3	14.3	14.1	14.3	14.6	14.4	14.1	14.7	14.7	14.6	14.3	14.6	14.5	20.1	17.6	15.1
12	13.9	13.9	13.9	13.8	13.9	13.8	13.7	13.7	13.9	13.8	13.6	13.9	14.0	13.9	13.8	14.0	13.9	19.5	17.0	14.6
13	13.9	13.8	13.8	13.8	13.8	13.7	13.5	13.5	13.7	13.6	13.5	13.6	13.7	13.6	13.7	13.7	13.7	18.9	16.5	14.2
14	14.3	14.1	14.1	14.1	14.1	13.9	13.7	13.7	13.8	13.8	13.6	13.7	13.8	13.8	13.9	13.8	13.8	18.4	16.1	13.8
15	16.7	16.2	16.2	16.2	16.2	15.7	15.3	15.3	15.3	15.3	15.2	15.2	15.2	15.3	15.7	15.3	15.3	18.0	15.7	13.5
16	18.7	18.5	18.5	18.5	18.5	18.1	17.6	17.6	17.7	17.7	17.6	17.7	17.7	17.6	18.1	17.7	17.6	17.6	15.4	13.2
17	15.0	15.6	14.9	14.9	15.3	15.6	16.2	16.0	16.0	15.9	15.8	16.0	16.0	16.0	15.2	15.9	16.0	17.3	15.1	13.0
18	13.5	14.8	13.7	13.7	15.5	13.9	14.9	13.5	13.9	13.5	13.5	13.7	13.8	13.7	13.6	13.5	13.8	17.0	14.9	12.7
19	13.4	14.8	13.6	13.6	15.2	13.4	15.2	13.3	13.4	13.3	13.4	13.4	13.4	13.4	13.6	13.4	13.4	16.7	14.6	12.5
20	13.2	14.5	13.4	13.4	14.9	13.2	14.9	13.1	13.3	13.1	13.2	13.2	13.2	13.2	13.4	13.2	13.2	16.5	14.4	12.4
21	13.1	14.2	13.3	13.3	14.6	13.1	14.6	13.0	13.1	13.0	13.1	13.1	13.1	13.1	13.3	13.1	13.1	16.3	14.2	12.2
22	13.0	14.0	13.1	13.0	13.8	13.0	14.4	12.9	13.0	12.9	13.0	13.0	13.0	13.0	13.2	13.0	13.0	16.1	14.1	12.1
23	12.6	12.6	-	-	12.5	12.5	12.6	-	-	-	-	-	12.6	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass B limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]								IEC 61400-1 Ed3 Turbine Subclass		
	Cha_18	Cha_19	Cha_20	Cha_21	Cha_22	Cha_23	Cha_24	Cha_25	A	B	C
3	31.9	32.7	32.5	31.9	31.3	32.6	33.6	32.3	41.9	36.6	31.4
4	25.7	26.8	26.6	26.0	25.0	27.0	27.9	26.6	34.4	30.1	25.8
5	21.9	23.3	23.1	22.3	21.2	24.0	24.6	22.9	29.9	26.2	22.4
6	19.5	20.8	20.7	20.0	19.0	21.8	22.5	21.1	26.9	23.6	20.2
7	17.9	19.0	18.9	18.2	17.5	19.7	20.7	19.7	24.8	21.7	18.6
8	16.5	17.5	17.5	16.7	16.2	17.8	19.0	18.3	23.2	20.3	17.4
9	15.3	16.1	16.1	15.4	15.1	16.1	17.2	16.6	22.0	19.2	16.5
10	14.7	15.2	15.1	14.7	14.6	15.0	15.6	15.4	21.0	18.3	15.7
11	14.1	14.3	14.3	14.1	14.0	14.1	14.5	14.5	20.1	17.6	15.1
12	13.8	13.9	13.9	13.7	13.6	13.7	13.9	14.0	19.5	17.0	14.6
13	13.7	13.8	13.8	13.7	13.6	13.7	13.7	13.9	18.9	16.5	14.2
14	14.0	14.1	14.0	13.9	13.8	13.9	13.8	14.2	18.4	16.1	13.8
15	16.2	16.1	16.0	15.9	15.6	16.0	15.3	16.2	18.0	15.7	13.5
16	18.5	18.6	18.6	18.3	18.0	18.4	17.7	18.5	17.6	15.4	13.2
17	15.3	16.4	16.4	15.8	16.0	15.6	16.1	15.1	17.3	15.1	13.0
18	13.4	15.6	15.5	14.0	13.4	14.0	13.4	13.5	17.0	14.9	12.7
19	13.2	15.6	15.5	13.9	12.9	12.8	13.2	13.4	16.7	14.6	12.5
20	13.0	15.2	15.2	13.7	12.8	12.7	13.0	13.2	16.5	14.4	12.4
21	12.9	14.9	14.8	13.5	12.7	12.5	12.9	13.1	16.3	14.2	12.2
22	12.8	14.6	14.5	13.3	12.6	12.4	12.8	13.0	16.1	14.1	12.1
23	-	-	-	-	12.5	12.3	12.6	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass A limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Table G-6 Predicted profiles of design equivalent turbulence intensity at the Petauke site for a Generic 4 MW wind turbine at a hub height of 130 m

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]																	IEC 61400-1 Ed3 Turbine Subclass		
	Pet_01	Pet_02	Pet_03	Pet_04	Pet_05	Pet_06	Pet_07	Pet_08	Pet_09	Pet_10	Pet_11	Pet_12	Pet_13	Pet_14	Pet_15	Pet_16	Pet_17	A	B	C
3	33.2	33.3	33.4	32.9	32.7	32.9	33.0	33.1	32.8	33.9	34.5	33.0	34.5	33.3	34.6	34.0	33.2	41.9	36.6	31.4
4	27.5	27.7	28.2	27.2	26.9	27.1	27.5	27.7	27.0	28.8	29.4	27.4	29.8	27.9	29.7	28.8	27.7	34.4	30.1	25.8
5	23.4	23.8	24.8	23.5	23.2	23.1	23.5	23.8	23.0	25.2	25.7	23.6	26.5	24.3	26.1	24.8	23.6	29.9	26.2	22.4
6	20.1	20.6	22.1	20.5	20.2	19.7	20.1	20.6	19.7	22.2	22.7	20.5	23.7	21.5	23.0	21.6	20.2	26.9	23.6	20.2
7	17.2	18.0	19.9	17.9	17.6	16.8	17.4	18.0	16.8	19.5	20.0	18.1	21.1	19.3	20.2	18.9	17.3	24.8	21.7	18.6
8	14.9	16.3	17.9	15.6	15.5	14.7	15.6	15.9	14.7	17.2	17.9	15.9	18.8	17.4	17.8	16.8	15.2	23.2	20.3	17.4
9	13.4	15.2	16.3	13.7	14.3	13.3	14.4	14.3	13.2	15.5	16.3	14.6	17.1	16.1	16.5	15.4	13.7	22.0	19.2	16.5
10	12.3	14.2	14.9	12.4	13.1	12.3	13.3	13.2	12.2	14.2	15.0	13.3	15.7	14.8	15.0	14.0	12.7	21.0	18.3	15.7
11	11.6	13.1	13.7	11.4	12.1	11.7	12.5	12.3	11.5	13.0	13.7	12.1	14.3	13.4	13.9	12.9	11.9	20.1	17.6	15.1
12	11.1	12.1	12.7	10.8	11.2	11.2	11.7	11.6	11.0	12.2	12.7	11.3	13.4	12.5	12.9	12.0	11.4	19.5	17.0	14.6
13	10.8	11.5	12.0	10.3	10.6	11.2	11.4	11.3	10.7	11.6	11.9	10.7	12.6	11.8	12.1	11.3	11.0	18.9	16.5	14.2
14	11.2	11.7	11.8	10.2	10.1	11.8	11.8	11.6	11.0	11.5	11.7	10.3	12.2	11.5	11.9	11.3	11.3	18.4	16.1	13.8
15	12.4	13.0	12.5	10.7	10.2	13.2	13.2	13.1	11.9	12.2	12.3	10.5	12.5	11.8	13.2	12.4	12.7	18.0	15.7	13.5
16	13.1	13.6	13.6	11.7	10.8	13.0	13.7	13.5	13.2	13.9	13.8	11.4	14.3	12.8	13.6	13.4	13.6	17.6	15.4	13.2
17	12.7	13.0	12.9	12.7	11.9	12.8	12.9	12.8	12.6	12.9	12.8	12.8	13.2	13.1	13.3	13.4	12.9	17.3	15.1	13.0
18	12.1	12.3	12.5	12.0	12.1	12.1	12.4	12.3	12.1	12.5	12.9	12.2	13.0	12.8	12.8	12.9	12.6	17.0	14.9	12.7
19	11.6	11.6	12.7	11.5	11.4	11.5	11.7	11.9	11.8	12.2	12.6	12.0	12.8	12.7	11.8	13.0	12.3	16.7	14.6	12.5
20	11.3	11.5	12.4	11.3	11.1	11.4	11.6	11.8	11.8	11.3	11.6	11.7	11.9	11.7	11.8	13.8	12.2	16.5	14.4	12.4
21	11.3	11.5	-	11.3	11.2	11.1	11.6	11.7	11.4	11.4	12.5	12.4	11.6	13.5	-	-	12.5	16.3	14.2	12.2
22	11.2	-	-	11.1	11.3	11.0	-	-	11.3	11.3	12.6	12.7	-	13.5	-	-	-	16.1	14.1	12.1
23	-	-	-	10.8	-	-	-	-	-	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass B limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]								IEC 61400-1 Ed3 Turbine Subclass		
	Pet_18	Pet_19	Pet_20	Pet_21	Pet_22	Pet_23	Pet_24	Pet_25	A	B	C
3	33.1	34.2	35.7	35.1	34.8	34.8	34.1	32.9	41.9	36.6	31.4
4	27.5	29.5	30.7	29.9	29.6	29.5	29.0	27.4	34.4	30.1	25.8
5	23.3	26.2	26.9	25.9	25.6	25.4	25.2	23.5	29.9	26.2	22.4
6	19.8	23.4	23.8	22.8	22.5	22.2	22.1	20.2	26.9	23.6	20.2
7	16.9	20.9	21.1	20.1	19.9	19.4	19.7	17.5	24.8	21.7	18.6
8	14.7	18.6	19.0	18.1	18.1	17.6	17.9	15.4	23.2	20.3	17.4
9	13.3	16.7	17.6	16.7	16.7	16.3	16.5	13.8	22.0	19.2	16.5
10	12.3	15.3	15.9	14.9	15.1	14.6	15.0	12.6	21.0	18.3	15.7
11	11.6	13.9	14.7	13.6	13.6	13.3	13.6	12.0	20.1	17.6	15.1
12	11.1	12.9	13.4	12.5	12.4	12.2	12.3	11.4	19.5	17.0	14.6
13	10.8	12.1	12.6	11.7	11.8	11.7	11.6	11.0	18.9	16.5	14.2
14	11.2	11.6	12.5	11.9	11.7	11.7	11.6	11.0	18.4	16.1	13.8
15	12.6	11.7	13.5	13.1	13.4	13.8	12.6	11.7	18.0	15.7	13.5
16	13.6	13.4	13.2	13.2	13.3	13.4	13.9	13.0	17.6	15.4	13.2
17	12.7	13.1	13.8	13.5	13.0	13.0	12.9	13.0	17.3	15.1	13.0
18	12.4	12.6	12.3	12.2	12.5	12.5	12.4	12.4	17.0	14.9	12.7
19	12.2	12.1	13.7	14.0	12.3	12.0	12.5	11.9	16.7	14.6	12.5
20	12.4	11.5	11.8	11.9	13.1	12.7	12.8	11.8	16.5	14.4	12.4
21	-	11.3	-	-	-	12.5	-	11.6	16.3	14.2	12.2
22	-	11.2	-	-	-	-	-	11.5	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass A limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Table G-7 Predicted profiles of design equivalent turbulence intensity at the Mansa site for a Generic 4 MW wind turbine at a hub height of 130 m

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]																	IEC 61400-1 Ed3 Turbine Subclass		
	Man_01	Man_02	Man_03	Man_04	Man_05	Man_06	Man_07	Man_08	Man_09	Man_10	Man_11	Man_12	Man_13	Man_14	Man_15	Man_16	Man_17	A	B	C
3	34.1	34.5	33.0	33.9	34.5	34.3	34.6	34.6	34.2	34.3	34.4	34.4	34.5	34.4	33.0	33.9	34.7	41.9	36.6	31.4
4	29.2	29.3	27.8	28.6	29.2	29.1	29.2	29.3	29.0	29.1	29.2	29.0	29.2	29.2	27.7	28.5	29.3	34.4	30.1	25.8
5	25.6	25.8	24.0	24.9	25.5	25.4	25.5	25.6	25.4	25.4	25.5	25.3	25.5	25.5	23.7	24.8	25.6	29.9	26.2	22.4
6	23.3	23.5	21.9	22.5	23.3	23.2	23.4	23.5	23.1	23.1	23.2	23.0	23.2	23.2	21.5	22.5	23.4	26.9	23.6	20.2
7	21.1	21.3	20.0	20.2	21.0	20.9	21.1	21.2	21.0	20.9	21.0	20.8	20.9	20.9	19.6	20.3	21.2	24.8	21.7	18.6
8	19.5	19.7	18.6	18.2	19.2	19.1	19.3	19.5	19.3	19.1	19.1	19.0	19.1	19.2	18.1	18.4	19.3	23.2	20.3	17.4
9	17.6	17.8	17.0	16.1	17.2	17.0	17.3	17.5	17.4	17.1	17.0	16.9	17.1	17.2	16.4	16.3	17.3	22.0	19.2	16.5
10	15.5	15.7	15.1	14.2	15.0	14.9	15.1	15.3	15.3	14.9	14.8	14.8	14.9	15.1	14.3	14.2	15.1	21.0	18.3	15.7
11	13.1	13.4	12.8	12.6	13.2	13.1	13.4	13.5	13.2	12.9	12.9	13.0	13.1	13.1	12.3	12.7	13.3	20.1	17.6	15.1
12	11.2	11.5	11.1	10.9	11.4	11.3	11.5	11.6	11.4	11.0	11.1	11.1	11.3	11.2	10.6	11.0	11.3	19.5	17.0	14.6
13	9.7	9.9	9.5	9.6	9.9	9.8	10.0	9.9	9.8	9.7	9.8	9.8	9.9	9.8	9.3	9.7	10.1	18.9	16.5	14.2
14	8.8	8.9	8.8	8.3	9.1	9.0	9.1	9.2	8.9	8.6	8.6	8.8	8.9	8.9	8.6	8.4	8.9	18.4	16.1	13.8
15	7.8	7.9	8.1	8.6	8.3	8.3	8.1	8.0	8.0	7.6	8.0	8.2	8.4	8.2	7.8	8.3	8.4	18.0	15.7	13.5
16	8.1	8.4	7.5	9.1	9.0	9.0	9.0	8.7	7.9	8.2	8.8	9.2	9.4	9.2	8.2	9.3	9.7	17.6	15.4	13.2
17	8.9	8.8	8.6	10.0	10.0	9.9	9.9	9.9	9.0	8.9	9.3	9.9	10.3	10.5	10.1	9.9	10.0	17.3	15.1	13.0
18	10.5	10.5	10.5	11.9	11.2	11.0	11.0	10.8	10.1	9.9	10.6	11.4	12.0	12.2	11.7	11.7	11.6	17.0	14.9	12.7
19	12.1	12.4	11.4	11.7	12.3	12.0	12.9	12.6	12.0	11.3	11.9	12.5	13.1	13.1	11.9	13.0	12.9	16.7	14.6	12.5
20	13.3	14.0	11.9	15.1	15.0	14.9	15.0	14.7	11.8	12.2	14.0	14.8	14.9	14.1	12.0	15.0	14.9	16.5	14.4	12.4
21	13.1	13.8	11.8	-	14.5	14.5	14.6	14.2	13.2	13.7	14.3	14.4	14.4	13.7	11.9	14.6	14.5	16.3	14.2	12.2
22	-	-	-	-	-	-	-	-	11.5	-	-	-	-	-	-	-	-	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass B limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]								IEC 61400-1 Ed3 Turbine Subclass		
	Man _18	Man _19	Man _20	Man _21	Man _22	Man _23	Man _24	Man _25	A	B	C
3	33.2	33.8	34.4	34.5	33.1	33.3	33.9	34.1	41.9	36.6	31.4
4	27.9	28.5	29.3	29.2	27.7	27.8	28.7	29.0	34.4	30.1	25.8
5	24.0	24.9	25.7	25.6	23.8	24.1	25.0	25.5	29.9	26.2	22.4
6	21.8	22.4	23.3	23.3	21.6	21.6	22.6	23.0	26.9	23.6	20.2
7	19.7	20.0	21.2	21.1	19.6	19.3	20.4	20.8	24.8	21.7	18.6
8	18.2	18.3	19.5	19.5	18.1	17.7	18.8	19.3	23.2	20.3	17.4
9	16.4	16.3	17.6	17.5	16.4	15.7	16.9	17.3	22.0	19.2	16.5
10	14.3	14.3	15.4	15.3	14.3	13.8	14.8	15.3	21.0	18.3	15.7
11	12.5	12.4	13.2	13.2	12.3	12.1	12.7	13.0	20.1	17.6	15.1
12	10.7	10.5	11.2	11.3	10.6	10.3	10.8	11.1	19.5	17.0	14.6
13	9.4	9.2	9.8	9.9	9.3	9.1	9.4	9.6	18.9	16.5	14.2
14	8.8	8.0	8.7	8.9	8.6	8.2	8.5	8.6	18.4	16.1	13.8
15	7.7	7.8	7.7	7.9	7.8	7.9	8.0	7.8	18.0	15.7	13.5
16	8.3	8.3	8.3	8.7	8.4	8.6	8.2	8.2	17.6	15.4	13.2
17	9.6	9.2	9.2	9.7	10.1	9.9	9.7	9.0	17.3	15.1	13.0
18	10.6	10.9	10.6	11.1	11.6	12.2	11.8	10.9	17.0	14.9	12.7
19	11.5	12.0	12.3	12.8	11.7	13.2	12.3	12.1	16.7	14.6	12.5
20	12.2	13.4	13.7	14.2	12.1	13.5	12.9	13.3	16.5	14.4	12.4
21	12.1	13.1	13.5	14.0	12.0	13.2	12.6	13.0	16.3	14.2	12.2
22	-	-	-	-	-	-	-	-	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass A limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Table G-8 Predicted profiles of design equivalent turbulence intensity at the Malawi site for a Generic 4 MW wind turbine at a hub height of 130 m

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]																	IEC 61400-1 Ed3 Turbine Subclass		
	Mal_01	Mal_02	Mal_03	Mal_04	Mal_05	Mal_06	Mal_07	Mal_08	Mal_09	Mal_10	Mal_11	Mal_12	Mal_13	Mal_14	Mal_15	Mal_16	Mal_17	A	B	C
3	33.7	33.9	33.8	33.9	34.5	34.8	34.8	34.1	34.0	34.3	34.7	34.0	34.1	34.8	34.2	33.6	33.9	41.9	36.6	31.4
4	27.7	28.1	28.1	28.1	29.0	29.2	29.0	28.3	28.2	28.4	28.9	28.3	28.2	29.0	28.6	27.9	28.1	34.4	30.1	25.8
5	23.7	24.1	24.2	24.2	25.4	25.3	25.0	24.4	24.2	24.4	24.9	24.4	24.2	25.1	24.7	23.9	24.0	29.9	26.2	22.4
6	20.9	21.3	21.7	21.4	22.9	22.6	22.2	21.7	21.3	21.6	22.2	21.6	21.5	22.4	22.0	21.3	21.1	26.9	23.6	20.2
7	18.8	19.3	20.1	19.6	21.3	20.7	19.9	19.8	19.1	19.4	20.2	19.9	19.3	20.5	20.3	19.6	19.0	24.8	21.7	18.6
8	16.7	17.3	18.5	17.7	19.8	18.9	17.7	18.0	16.9	17.4	18.3	18.0	17.4	18.6	18.4	17.9	16.8	23.2	20.3	17.4
9	14.9	15.6	17.1	16.1	18.3	17.4	15.7	16.3	15.1	15.5	16.6	16.4	15.5	16.8	16.8	16.5	15.0	22.0	19.2	16.5
10	13.0	13.7	15.3	14.3	16.4	15.5	13.6	14.4	13.0	13.5	14.5	14.4	13.6	14.8	14.8	14.6	13.0	21.0	18.3	15.7
11	11.2	11.8	13.4	12.4	14.6	13.7	11.6	12.4	11.3	11.4	12.3	12.2	11.5	12.5	12.6	12.7	11.3	20.1	17.6	15.1
12	9.4	10.0	11.3	10.4	12.9	12.1	9.9	10.7	9.2	9.7	10.7	10.6	9.9	11.0	11.0	10.5	9.2	19.5	17.0	14.6
13	7.9	8.6	9.7	9.0	11.5	10.8	8.7	9.5	8.0	8.4	9.4	9.4	8.5	9.7	9.7	9.0	7.9	18.9	16.5	14.2
14	6.9	7.4	8.2	7.8	10.3	9.6	7.8	8.1	7.0	7.5	8.0	7.6	7.6	8.2	8.0	7.6	6.8	18.4	16.1	13.8
15	6.9	6.8	7.5	7.3	9.5	9.0	7.3	6.6	6.1	7.1	7.3	6.2	7.1	7.5	6.4	7.1	6.0	18.0	15.7	13.5
16	9.2	8.8	8.6	8.9	10.2	9.7	8.8	7.8	8.5	8.7	9.0	8.3	8.4	8.7	8.1	9.1	8.1	17.6	15.4	13.2
17	11.4	11.4	11.6	11.9	12.2	12.1	11.4	11.2	12.0	11.6	11.5	11.7	10.8	11.3	11.6	12.4	11.6	17.3	15.1	13.0
18	12.8	12.7	12.6	12.9	13.6	13.1	12.8	12.6	12.8	12.6	12.9	12.7	12.5	12.5	12.6	13.0	12.7	17.0	14.9	12.7
19	13.3	13.1	13.1	13.1	12.8	12.7	13.9	12.7	12.8	13.9	14.1	12.7	14.1	14.3	12.7	13.2	12.8	16.7	14.6	12.5
20	-	13.1	13.0	12.5	12.5	12.4	12.4	12.4	12.5	13.7	12.4	12.4	13.1	13.7	12.4	13.0	12.5	16.5	14.4	12.4
21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	16.3	14.2	12.2
22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$, for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass B limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.

Hub height wind speed [m/s]	Design equivalent turbulence intensity for individual turbine [%]								IEC 61400-1 Ed3 Turbine Subclass		
	Mal_18	Mal_19	Mal_20	Mal_21	Mal_22	Mal_23	Mal_24	Mal_25	A	B	C
3	34.3	35.1	34.0	34.4	34.9	33.9	34.0	33.9	41.9	36.6	31.4
4	28.5	29.4	28.8	28.7	29.3	28.0	28.2	28.4	34.4	30.1	25.8
5	24.6	25.5	25.2	24.7	25.8	24.0	24.2	24.6	29.9	26.2	22.4
6	21.9	22.8	23.0	21.9	23.3	21.2	21.5	22.3	26.9	23.6	20.2
7	19.7	21.0	21.6	19.7	21.7	19.0	19.6	20.9	24.8	21.7	18.6
8	17.8	19.2	20.5	17.5	20.1	16.9	17.7	19.6	23.2	20.3	17.4
9	15.8	17.5	19.2	15.5	18.6	15.1	16.1	18.3	22.0	19.2	16.5
10	13.9	15.4	17.6	13.4	16.7	13.1	14.1	16.5	21.0	18.3	15.7
11	11.7	13.0	15.7	11.7	14.8	11.2	12.3	14.6	20.1	17.6	15.1
12	10.2	11.5	13.6	9.8	13.0	9.1	10.2	12.4	19.5	17.0	14.6
13	8.8	10.3	12.1	8.7	11.6	7.8	8.8	10.8	18.9	16.5	14.2
14	8.0	8.7	10.7	7.7	10.3	6.5	7.5	9.2	18.4	16.1	13.8
15	7.6	7.7	9.7	6.7	9.8	6.1	7.0	8.6	18.0	15.7	13.5
16	8.8	9.3	10.4	8.4	10.6	8.9	9.0	9.9	17.6	15.4	13.2
17	10.9	12.2	12.9	11.8	13.1	12.4	12.3	12.9	17.3	15.1	13.0
18	12.5	12.7	13.5	12.8	13.7	12.8	12.9	13.2	17.0	14.9	12.7
19	14.5	14.3	13.2	12.6	12.7	13.1	13.3	13.3	16.7	14.6	12.5
20	13.5	14.0	13.0	12.4	12.5	12.5	13.4	12.6	16.5	14.4	12.4
21	-	-	11.9	-	-	-	-	-	16.3	14.2	12.2
22	-	-	-	-	-	-	-	-	16.1	14.1	12.1
23	-	-	-	-	-	-	-	-	15.9	13.9	11.9
24	-	-	-	-	-	-	-	-	15.7	13.8	11.8
25	-	-	-	-	-	-	-	-	15.6	13.6	11.7

Note: The wind speed range corresponding to $0.2V_{ref}$ to $0.4V_{ref}$ for IEC Class II is shown in **bold** font. Turbulence intensities that exceed subclass A limits within $0.2V_{ref}$ to $0.4V_{ref}$ are shown in **red** font.



DNV GL

Driven by our purpose of safeguarding life, property and the environment, DNV GL enables organizations to advance the safety and sustainability of their business. We provide classification and technical assurance along with software and independent expert advisory services to the maritime, oil and gas, and energy industries. We also provide certification services to customers across a wide range of industries. Operating in more than 100 countries, our 16,000 professionals are dedicated to helping our customers make the world safer, smarter, and greener.